



Professional CCTV System IR CCTV Bullet Camera

User Manual



Please Read This User Guide Carefully Before Use.



Warning



To prevent fire or electric shock hazard, do not expose the unit to rain or moisture. Only use the power supply specified for the unit.




Warning

Electronic shock dangerous, Don't open



CONNECTING CCTV SYSTEM

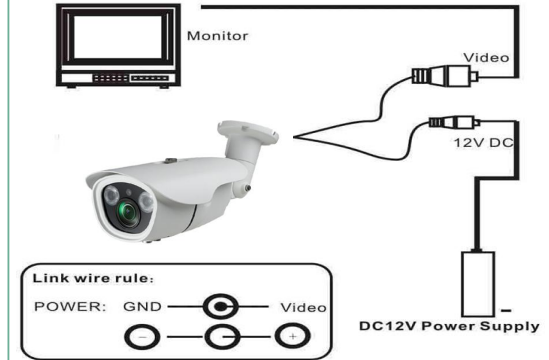

Specification

Model	XY-AHD1000BV 2,0MP 4IN1
System	PAL
Picture Elements	PAL:1920(H)*1080(V)
Horizontal Recolution	2.0 Megapixel
Video OutPut	Hybrid Video Output
S/N Ratio	≥48dB
Min.Illumination	0LUX(IR ON)
Electronic Shutter	1/50(1/60)S ~ 1/100,000S
White Balance	Auto
Gamma Ratio	> 0.45
Lens Mount	2.8~12mm 2MP lens
Operating Temp.	-10°C ~ +50°C
Humidity	0 to 95%RH(non-condensing)
Power/Current	DC 12V
Sync System	2:1 Interlace internal Sync.
IR Project Distance	35M / 2 units Array LED
IR Status	On
Outdoor/Indoor	Outdoor

Packing list

Name	Model	Number
Digital CCTV Camera	XY-AHD1000BV 2,0MP 4IN1	1
User Manual	XY-AHD1000BV 2,0MP 4IN1	1

Changing the Setting on 4 in 1 camera

Hold button for 5 seconds according to table below to change setting.

Once set, remove power - Unit will now remain on new setting.

DIRECTION	UP	DOWN	RIGHT	LEFT
VIDEO	CVI	TVI	AHD	ANALOGUE (CVBS)

Note: Camera default setting is AHD.

Method to change to TVI:

Hold button to left for approx 5 sec, (no need to press button down), camera will switch to TVI, pull out power from camera, camera will remain set to TVI.

Method to change to Analog (CVBS):

Hold button to RIGHT for approx 5 sec, camera will switch to Analog, pull out power from camera, camera will remain set to Analog.

Method to change to CVI:

Hold button to DOWN for approx 5 sec, camera will switch to CVI, pull out power from camera, camera will remain set to CVI.



Notes:

*Please note the camera's operating temperature and its using environment. Avoid using the camera at too high or too low temperatures.
*Never make the camera face the sun or bright object. otherwise will damage the CCD.