

- Anti-Vandal IK09/ Sealed IP65/67
- Illuminated and Non-Illuminated
- Momentary/ Latching
- Variety of colors

Momentary: Means that when you push switch and then move your finger, the actuator will back to the original position.

Latching: Means that when you push switch once it will change state and stay in this pushed-down position and will not come back to original position unless you push it again

## Technical Data

Illuminated Options	Non-Illuminated	Circle	Dot
<b>Terminal</b>	Screw/ Pin(2.8X0.5) / PCB		
<b>Max. Switch Rating</b>	5A 250VAC / 2A 36VDC		
<b>Contact Resistance</b>	≤ 50mΩ		
<b>Insulation Resistance</b>	≥ 1000mΩ		
<b>Dielectric Strength</b>	2000VAC		
<b>Operation Temp.</b>	-20℃ ~ +55℃		
<b>Mechanical Life</b>	1,000,000cycles		
<b>Electrical Life</b>	200,000cycles		
<b>Contact Material</b>	Silver Alloy		
<b>Torque</b>	5 ~ 14Nm		
<b>Operation Pressure</b>	3 ~ 5N		
<b>Protection</b>	IP65/ IK09		
<b>Material</b>			
<b>Actuator</b>	Stainless Steel/ *Anodized Aluminum / Nickel Plated Brass / Zinc Alloy		
<b>Body</b>	Stainless Steel/ *Anodized Aluminum / Nickel Plated Brass / Zinc Alloy		
<b>Base</b>	PBT		
<b>Color</b>			
<b>Type</b>	LED		
<b>Voltage</b>	6V/ 12V/ 24V/ 36V/ 110V/ 230V		
<b>Color</b>	<span style="color:red">R</span> <span style="color:green">G</span> <span style="color:yellow">Y</span> <span style="color:orange">O</span> <span style="color:blue">B</span> <span style="color:white">W</span>		
<b>Life</b>	Approx. 40, 000hours		


\*Material and Color voltage can be customized.

## Order Code


	Switch Style	Size Panel Cutout	Actuator	Terminal	Function	Config.	Material	LED Style	LED Color	LED Voltage	Custom Marking
<b>A</b>											
<b>V</b>											
<b>CE</b>											



## Configuration

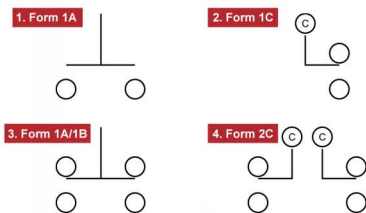

## Terminals

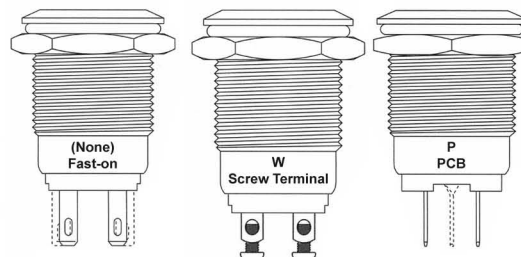

## LED Style

