



Starter Package	Z-Wave Gateway	PIR Motion Sensor	3-in-1 sensor Door/Window + Illumination + Temperature	Smart Plug	IP Camera
SK-101	✓	✓	✓	✓	
SK-102	✓	✓	✓		
SK-103	✓	✓	✓		✓
SK-104	✓	✓	✓	✓	✓



## Smart Home Starter Kits SK-101/102/103/104

- Z-wave Plus technology support mesh networking
- Up to 40m coverage at open space with lower power consumption
- Expandable and compatible with other smart home devices
- Can be applied to different automatic home applications
- Control effortlessly via AirLive SmartLife Plus APP
- Easy to install: All sensors are pre-paired with Gateway
- Control anywhere: Support P2P technology
- Package select: Provide 4 IoT kits to choose





### Home, just a Tap Away

Create your own system  
 Gateway and sensors are pre-paired for zero setup  
 Secure your home 24/7  
 Lighting control available  
 Home Automation available  
 Support Google Home|Assistant and Amazon Alexa  
 Built-in siren to protect your home as security system  
 Business level security based on 128-bit AES encryption  
 Multiple brand support by Z-wave

### Automation Life available

Using the AirLive SmartLife Plus app is the best way to control your AirLive Z-Wave Smart Home system. Setup your Z-Wave devices which are connected to the SG-101 Gateway and receive notifications. Make Scenes, Macro's and even setup schedules all is possible with the easy to use APP from AirLive.

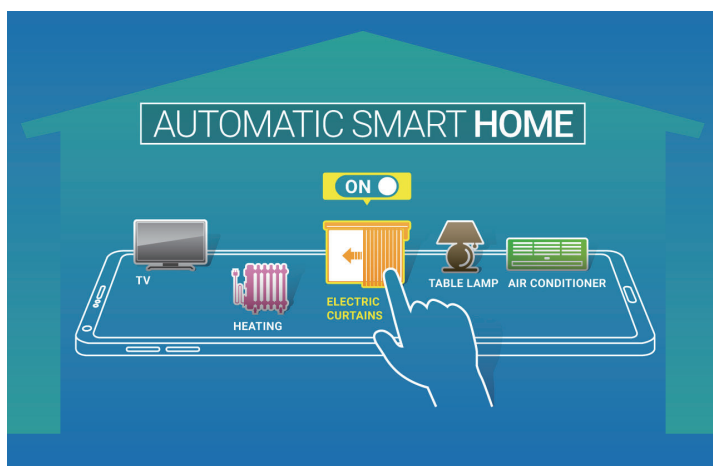

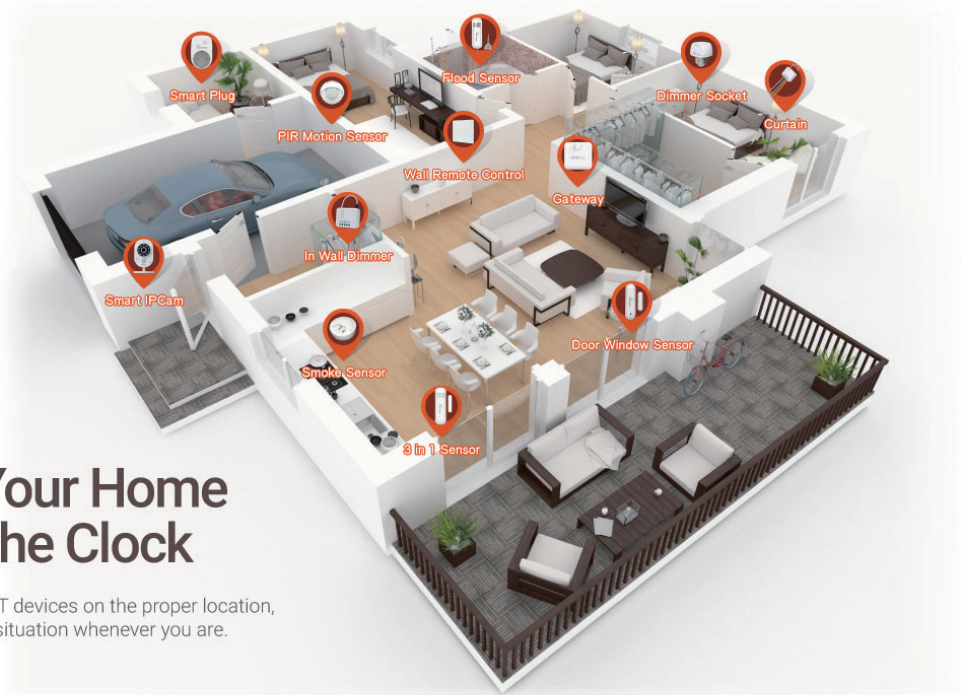

## Secure Your Home Around the Clock

After putting AirLive IoT devices on the proper location, you can control every situation whenever you are.

### Secure your home 24/7

With the built-in siren the SG-101 can warn you when a sensor is triggered. This can be a Alarm from a PIR, Door/Window sensor or a Macro you setup separately to inform you of a certain situation. The camera will provide continues live-view and also record to your mobile / storage / camera SD card.

### Convenient Lighting Control

As the main controller of your Smart Home system the SG-101 in combination with the In-Wall switch and dimmer can control your lights. Turn your lights on before you arrive home or turn them off when you are in the office. All is possible using the AirLive SmartLife Plus App and the SG-101. Dim your lights when watching TV with the push of a button or via Voice Control.



### Operate your Home using your Voice

The AirLive SG-101 Gateway supports Voice Control with Amazon Alexa and Google Home / Assistant. Using the AirLive SmartLife Plus App you can make scenes which can be controlled via your Voice. For example turn your lights on by saying "light on" or say "close curtain" and automatically your curtain will close. Voice control will make your life easier.

## Specifications

Model	SG-101 Smart Home Gateway with Siren Z-Wave Plus
Maximum transmission distance	40 M (Indoor)
Z-Wave Standard	Z-wave plus
Z-Wave Frequency	CE : 868.40 MHz, 869.85 MHz
	FCC : 908.40 MHz, 916.00 MHz
	JPN : 922 MHz ~ 927 MHz
	ANZ : 919.8 MHz, 921.4 MHz
Maximum connected Z-Wave devices	232
Siren	Built-in 6 tune Siren
WiFi	IEEE 802.11 b/g/n
WiFi Output Power	11 dBi
Network (LAN)	10/100 Base-T RJ45
Power	DC 5 V 1 A adaptor
Dimensions	110(L) x 110(W) x 19(H) mm

## Specifications

Model	SI-101 3-in-1 sensor Door/Window + Illumination + Temperature Z-Wave Plus
Maximum transmission distance	40 M (Indoor)
Z-Wave Standard	Z-wave plus
Door Sensor Magnetic Gap	3 mm
Temperature Sensor Detected Range	-10 ~ 70° C
Illumination Range	0 ~ 500 Lx
Power	Built-in Battery (CR123A 1700 mA)
Detector Dimension	96(L) x 28(W) x 23(H) mm
Magnet Dimension	50(L) x 12(W) x 10(H) mm

## Specifications

Model	SI-102 Motion Sensor with cover Z-Wave Plus
Maximum transmission distance	40 M (Indoor)
Motion Detection Range	8 Meter / 140 degree
Z-Wave Standard	Z-wave plus
Power	Built-in Battery (CR123A 1700 mA)
Dimensions	50(L) x 45.5(W) x 49.3(H) mm

## Specifications

Model	SP-101 Smart Plug Z-Wave Plus
Maximum transmission distance	40 M (Indoor)
Z-Wave Standard	Z-wave plus
Power input Range	100 ~ 240 VAC
Overload Current	14.5 A
Maximum Output Current	13 A (Resistive Load)
Maximum Output Power	110 Vac: 1500 W
	220 Vac: 3000 W
Maximum Measurement Error	3 W
Dimensions (Body)	51(L) x 78(W) x 38(H) mm

## Specifications

Model	SmartCube 300W IP-Camera
Image Sensor	1/3" CMOS sensor
Max. Resolution	3MP (2048x1536)
Viewing Angle	80°(D) 72 °(H) 47 °(V)
Max. IR Distance	15 M
Built-in Hardware	PIR sensor, ICR, Speaker, Microphone
WiFi	802.11n
LAN	10/100
SD card Slot	Micro SDXC
Power	5 V / 1 A

## Model

SK-101	Smart Home Starter kit including Gateway, 3-in-1 sensor, motion sensor and Smart plug.
SK-102	Smart Home Starter kit including Gateway, 3-in-1 sensor, and Motion sensor.
SK-103	Smart Home Starter kit including Gateway, 3-in-1 sensor, Motion sensor and SmartCube 300W.
SK-104	Smart Home Starter kit including Gateway, 3-in-1 sensor, Motion sensor, Smart plug and SmartCube 300W.

## Specifications

Package Type	
Package Size	16.7 x 16.7 x 16 cm
Package Weight	SK-101: 1.05 kg SK-102: 0.95 kg SK-103: 1.2 kg SK-104: 1.3 kg
Package Content SK-101	Gateway, Motion sensor, 3-in-1 sensor, Smart plug, QIG * 1, Power adapter, Cable
Package Content SK-102	Gateway, Motion sensor, 3-in-1 sensor , QIG * 1, Power adapter, Cable
Package Content SK-103	Gateway, Motion sensor, 3-in-1 sensor, Smart Cube 300W, QIG * 1, Power adapter * 2, Cable, Stands, Mounting accessories
Package Content SK-104	Gateway, Motion sensor, 3-in-1 sensor, Smart Cube 300W, QIG * 1, Power adapter * 2, Cable, Stands, Mounting accessories, Smart plug

## Carton Package

Quantity	12
Dimensions	51.5 x 34.5 x 34.9 cm
Weight	