



Digital module, 4 inputs and 2 relay outputs, input voltage 110-240 V AC/DC relay outputs monostable, max. 2 digital modules, for SIMOCODE pro V basic unit

<b>product brand name</b>	SIMOCODE
<b>product designation</b>	digital modules
<b>product type designation</b>	DM mono
<b>General technical data</b>	
<b>product component</b>	
<ul style="list-style-type: none"> <li>input for thermistor connection</li> </ul>	No
<ul style="list-style-type: none"> <li>digital input</li> </ul>	Yes
<ul style="list-style-type: none"> <li>input for analog temperature sensors</li> </ul>	No
<ul style="list-style-type: none"> <li>input for ground fault detection</li> </ul>	No
<ul style="list-style-type: none"> <li>relay output</li> </ul>	Yes
<b>consumed active power</b>	0.7 W
insulation voltage with degree of pollution 3 at AC rated value	300 V
<b>surge voltage resistance rated value</b>	4 000 V
<b>shock resistance according to IEC 60068-2-27</b>	15g / 11 ms
<b>vibration resistance according to IEC 60068-2-6</b>	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
<b>switching capacity current of the NO contacts of the relay outputs at AC-15</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	6 A
<ul style="list-style-type: none"> <li>at 120 V</li> </ul>	6 A
<ul style="list-style-type: none"> <li>at 230 V</li> </ul>	3 A
<b>switching capacity current of the NO contacts of the relay outputs at DC-13</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	2 A
<ul style="list-style-type: none"> <li>at 60 V</li> </ul>	0.55 A
<ul style="list-style-type: none"> <li>at 125 V</li> </ul>	0.25 A
<b>mechanical service life (operating cycles) typical</b>	10 000 000
electrical endurance (operating cycles) typical	100 000
<b>reference code according to IEC 81346-2</b>	K
<b>reference code according to IEC 81346-2:2019</b>	K
continuous current of the NO contacts of the relay outputs	
<ul style="list-style-type: none"> <li>at 50 °C</li> </ul>	6 A
<ul style="list-style-type: none"> <li>at 60 °C</li> </ul>	5 A
<b>Substance Prohibition (Date)</b>	05/01/2012
<b>SVHC substance name</b>	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
<b>Net Weight</b>	147 g
<b>Electromagnetic compatibility</b>	
EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3
<b>conducted interference</b>	

<ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> </ul>	1 kV
<ul style="list-style-type: none"> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV
<ul style="list-style-type: none"> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV
<ul style="list-style-type: none"> <li>• due to high-frequency radiation according to IEC 61000-4-6</li> </ul>	10 V
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>conducted HF interference emissions according to CISPR11</b>	corresponds to degree of severity A
<b>field-bound HF interference emission according to CISPR11</b>	corresponds to degree of severity A
<b>Inputs/ Outputs</b>	
<b>product function</b>	
<ul style="list-style-type: none"> <li>• parameterizable inputs</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• parameterizable outputs</li> </ul>	Yes
<b>number of inputs</b>	4
<b>number of digital inputs</b>	4
<ul style="list-style-type: none"> <li>• with a common reference potential</li> </ul>	4
<b>digital input version</b>	
<ul style="list-style-type: none"> <li>• type 1 acc. to IEC 61131</li> </ul>	No
<ul style="list-style-type: none"> <li>• type 2 acc. to IEC 61131</li> </ul>	No
<b>number of analog inputs</b>	0
input voltage at digital input at DC rated value	110 V
<b>number of outputs</b>	2
<b>number of semiconductor outputs</b>	0
<b>number of outputs as contact-affected switching element</b>	2
<b>number of analog outputs</b>	0
<b>switching behavior</b>	monostable
<b>property of contacts of the relay outputs</b>	Floating NO contacts (NC reaction parameterizable via internal signal conditioning), connected to common ground, can be freely assigned to the control functions (e.g. line, star (wye), delta contactor or signaling of the operating state)
<b>wire length for digital signals maximum</b>	200 m
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting
<b>height</b>	92 mm
<b>width</b>	22.5 mm
<b>depth</b>	124 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>• top</li> </ul>	40 mm
<ul style="list-style-type: none"> <li>• bottom</li> </ul>	40 mm
<ul style="list-style-type: none"> <li>• left</li> </ul>	0 mm
<ul style="list-style-type: none"> <li>• right</li> </ul>	0 mm
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
type of electrical connection for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	1x (0.5 ... 4.0mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded with core end processing</li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• for AWG cables solid</li> </ul>	1x (20 ... 14), 2x (20 ... 16)
<ul style="list-style-type: none"> <li>• for AWG cables stranded</li> </ul>	1x (20 ... 12), 2x (20 ... 14)
tightening torque with screw-type terminals	0.8 ... 1.2 N·m
tightening torque [lbf·in] with screw-type terminals	7 ... 10.3 lbf·in
<b>Ambient conditions</b>	
<b>installation altitude at height above sea level</b>	
<ul style="list-style-type: none"> <li>• 1 maximum</li> </ul>	2 000 m
<ul style="list-style-type: none"> <li>• 2 maximum</li> </ul>	3 000 m; max. +50 °C (no protective separation)
<ul style="list-style-type: none"> <li>• 3 maximum</li> </ul>	4 000 m; max. +40 °C (no protective separation)
<b>ambient temperature</b>	

<ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> <li>during transport</li> </ul>	<p>-25 ... +60 °C</p> <p>-40 ... +80 °C</p> <p>-40 ... +80 °C</p>				
<b>environmental category</b> <ul style="list-style-type: none"> <li>during operation according to IEC 60721</li> <li>during storage according to IEC 60721</li> <li>during transport according to IEC 60721</li> </ul>	<p>3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p> <p>3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p> <p>3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p>				
relative humidity during operation	5 ... 95 %				
<b>contact rating of auxiliary contacts according to UL</b>	B300 / R300				
<b>Short-circuit protection</b>					
design of short-circuit protection per output	Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I <sub>K</sub> < 500 A)				
<b>Electrical Safety</b>					
<b>touch protection against electrical shock</b>	finger-safe				
<b>ATEX</b>					
certificate of suitability according to ATEX directive 2014/34/EU	BVS 06 ATEX F001				
explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2)				
<b>Galvanic isolation</b>					
<b>(electrically) protective separation according to IEC 60947-1</b>	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)				
<b>Control circuit/ Control</b>					
<b>type of voltage of the control supply voltage</b>	AC/DC				
<b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> </ul>	<p>110 ... 240 V</p> <p>110 ... 240 V</p>				
<b>control supply voltage frequency 1</b>	50 ... 60 Hz				
<b>control supply voltage at DC rated value</b>	110 ... 240 V				
<b>operating range factor control supply voltage rated value at DC</b> <ul style="list-style-type: none"> <li>initial value</li> <li>full-scale value</li> </ul>	<p>0.85</p> <p>1.1</p>				
<b>operating range factor control supply voltage rated value at AC at 50 Hz</b> <ul style="list-style-type: none"> <li>initial value</li> <li>full-scale value</li> </ul>	<p>0.85</p> <p>1.1</p>				
<b>operating range factor control supply voltage rated value at AC at 60 Hz</b> <ul style="list-style-type: none"> <li>initial value</li> <li>full-scale value</li> </ul>	<p>0.85</p> <p>1.1</p>				
<b>Approvals Certificates</b>					
<b>Environment</b>	<b>General Product Approval</b>				
	<a href="#">Environmental Confirmations</a>	 <p>EG-Konf.</p>		 <p>UL</p>	
<b>EMV</b>	<b>For use in hazardous locations</b>	<b>Test Certificates</b>	<b>Maritime application</b>		
	 <p>ATEX</p>	 <p>IECEX</p>	<a href="#">Miscellaneous</a>	<a href="#">Type Test Certificates/Test Report</a>	 <p>ABS</p>
<b>other</b>	<b>Industrial Communication</b>				



Confirmation



#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7300-1AU00-0>

##### Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7300-1AU00-0>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UF7300-1AU00-0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UF7300-1AU00-0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7300-1AU00-0&lang=en)

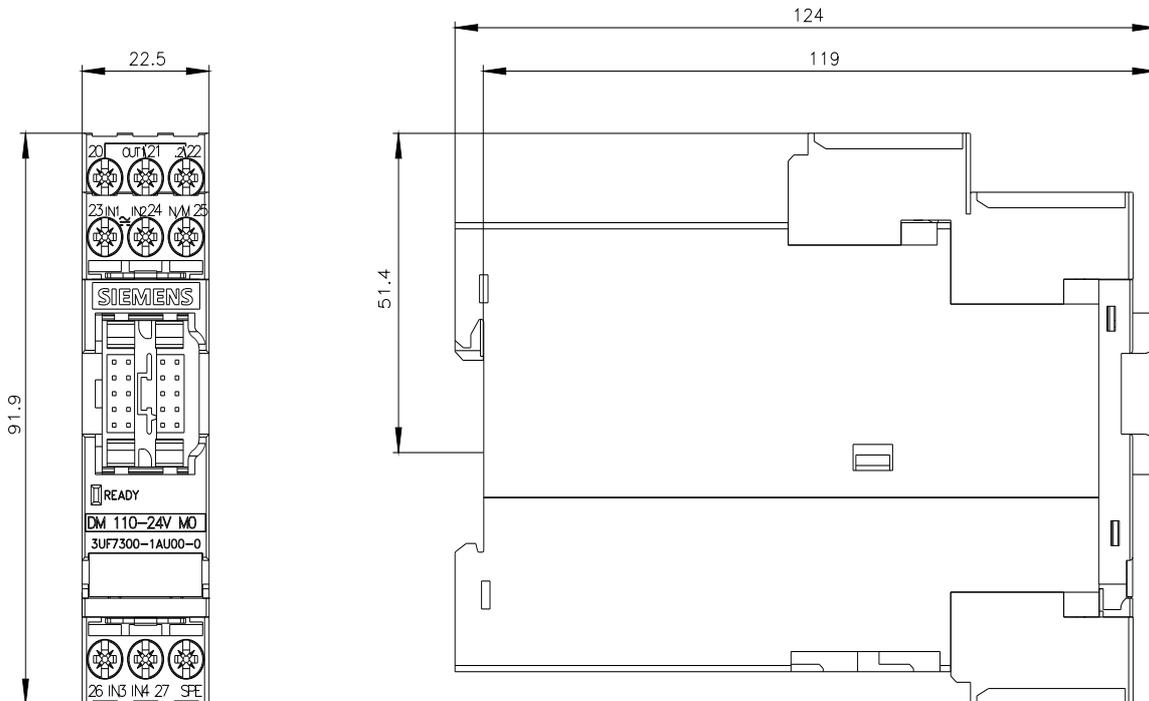

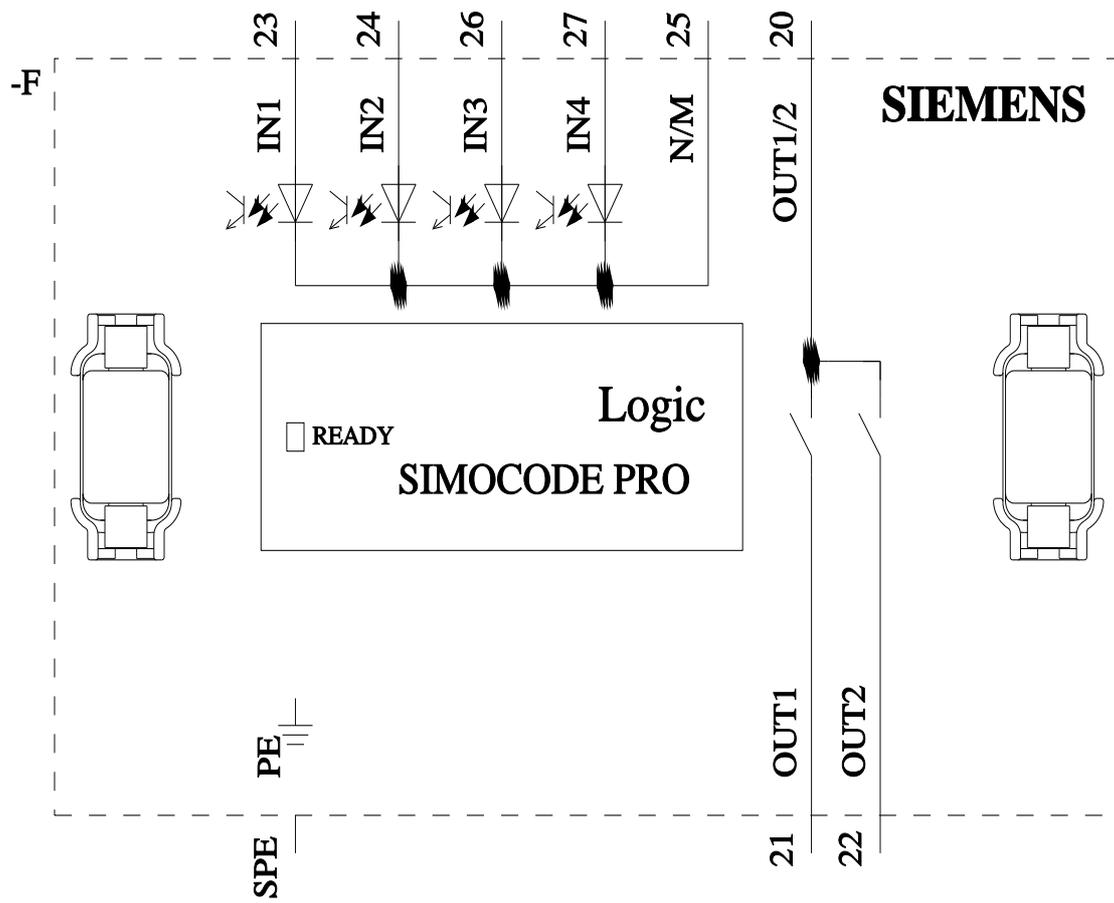

last modified:

12/13/2025 