


Thank you for selecting as your lighting choice for your home. With proper care, this product will provide years of pleasure and enjoyment. Carefully follow the instructions in order to ensure that this product functions safely and properly for years to come.

SOLAR POWERED MOTION ACTIVATED LIGHT

READ ALL INSTRUCTIONS BEFORE PROCEEDING WITH INSTALLATION. WIRING THE UNIT INCORRECTLY MAY DAMAGE THE ELECTRONIC COMPONENTS INSIDE THIS CONTROL MODULE AND CAN CAUSE A FIRE HAZARD. DOING SO WILL VOID ALL WARRANTY CLAIMS.

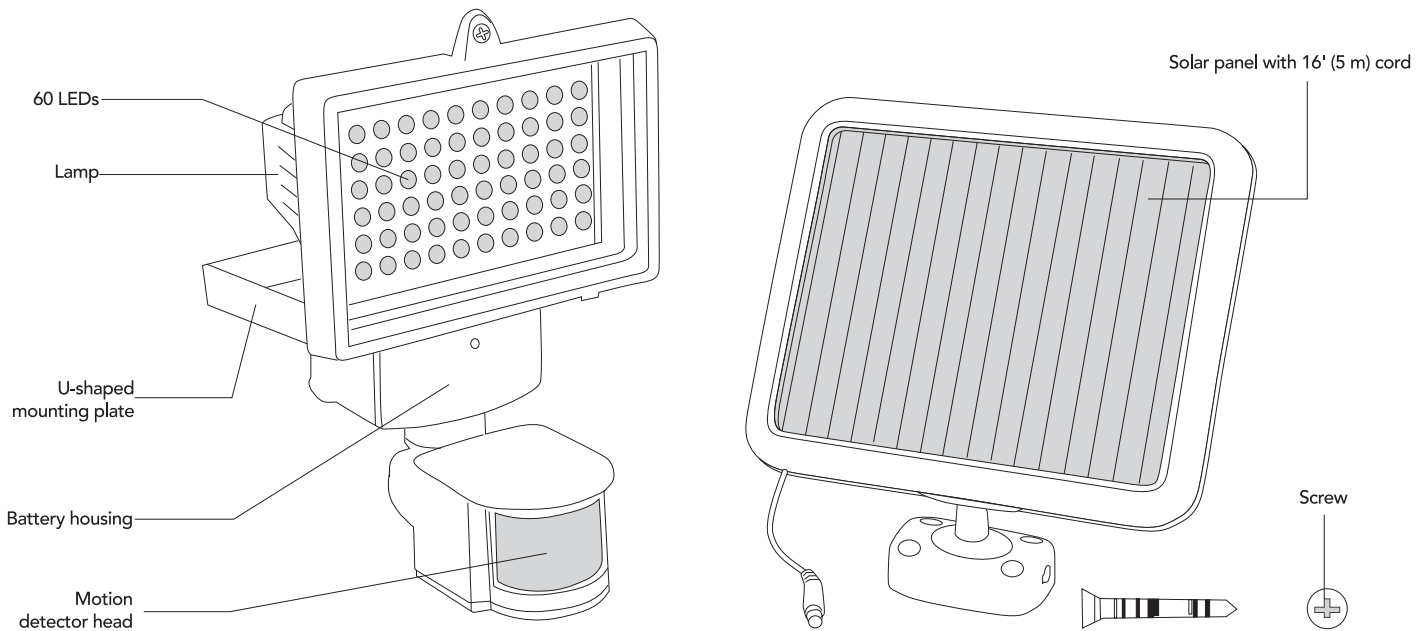

INSTALLATION

SOLAR PANEL: WALL OR DECK MOUNTED

- 1) Secure bracket to solar panel with screws provided.
 - 2) Set the bracket on a flat surface and secure it in place with the large screws provided.
 - 3) Adjust the angle of the solar panel to ensure it receives optimum sunlight.
- Note: The solar panel is equipped with a 16' (5 m) cord so the units can be installed up to 16' (5 m) apart.

LIGHT INSTALLATION

- 1) Use the U-shaped mounting plate located to the rear of the light to mark where you want to install the light.
- 2) Make sure the surface is clear of obstacles such as cables and electrical lines.
- 3) Secure the light to the wall with the screws provided.
- 4) Carefully route the power cord from the solar panel to the light, and plug it into the battery housing input.
- 5) Adjust the motion sensor so that it faces the area where motion is most likely to be detected. You can move it up and down by adjusting the screw on the neck of the motion detector.

Note: Light unit should be mounted 6 1/2 to 10' (2 to 3 m) from the ground to ensure motion detection is optimized.

CAUTION:

- Do not install close to flames or flammable gases. Keep away from children.
- Do not install on a unstable surface/position.
- Do not stare directly at the light while it is on. To prevent the unit from falling, install the base unit tightly with an anchor.
- Do not install in close proximity to other light sources.

MAINTENANCE:

- Ensuring the lamp is kept clean will optimize performance.
- Clean solar panel with a damp towel. Do not apply excessive pressure.
- Do not use any solvents or cleaning agents on the solar panel.

OPERATION

- 1) Located underneath the battery housing there is a switch with 3 positions.
- "AUTO"**—when the switch is in the "AUTO" position the security light will turn on automatically at night when motion is detected.
 - "ON"**—when the switch is in the "ON" position the light will remain on and can be used as a regular light.
 - "OFF"**—when the switch is in the "OFF" position the light will remain off and will not detect any movement.

HOW TO USE CONTROL DIALS

The security light has 3 different control dials which allow you to adjust the settings. These control dials can be located underneath the motion detector head.

- Sensitivity to light (Lux).
- The light duration once motion has been detected (Time).
- Sensitivity to motion (Sens).

Lux: This is the level of darkness reached before the light turns on.

- If set to maximum level, the light will turn on in most situations ranging from dusk to daylight.
- If set to minimum level, the light will turn on in the dark. This is the most ideal position for general evening and night operation.

Time: This dial will set the duration of time the light will stay illuminated for after motion has been detected. The time can be adjusted from 8 seconds to 10 minutes. Rotating the dial clockwise will extend the time the lamp is illuminated.

Sens: This determines the range of the motion detector.

- Mid Position—Normal Setting
- Maximum position—Maximum sensor's range 16' 5" (5 m).

TROUBLESHOOTING

If your security light does not illuminate when movement is detected, please check the following:

- Ensure the solar panel is in a location where it will receive maximum sunlight during daytime hours.
- Clean solar panel with a damp towel. Do not apply excessive pressure and avoid the use of any solvents or cleaning agents on the solar panel.
- Ensure switch is set to "AUTO".
- Allow panel to charge in direct sunlight for 2 days to confirm the batteries are fully charged.