



POWER SUPPLY

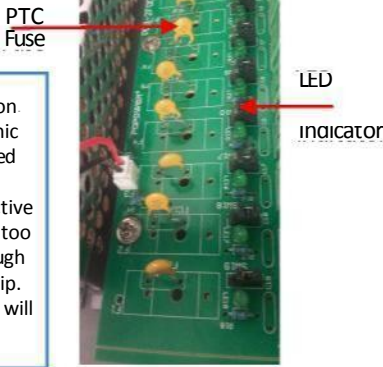

- Universal AC Input
- Short Circuit Protection / Overload / Over Voltage
- LED indicator for power
- 2 year warranty

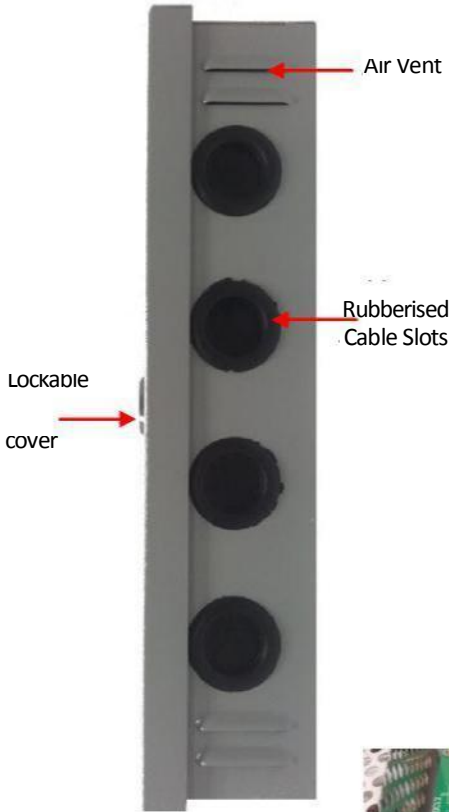

A PTC device comprises a non-conductive crystalline organic polymer matrix that is loaded with particles to make it conductive. Since it is conductive it will pass a given current. If too much current is passed through the device, the device will trip. Once fault is rectified the PTC will reset itself.

CCTV POWERBOX 18C25A

OUTPUT	DC VOLTAGE	12V
	RATED CURRENT	Total 25A 18 Channels: 1.39A for each channel
	CURRENT RANGE	0-25A
	RATED POWER	300W
	DC VARIANCE (max)	180mVpp
	VOLTAGE ADJ. RANGE	10.8-13.2V
	VOLTAGE TOLERANCE	+/- 1.0%
	LINE REGULATION	+/- 0.5%
	LOAD REGULATION	+/- 1.0%
	SETUP, RISE TIME	2000ms, 60ms/230VAC at full load
INPUT	HOLD UP TIME (Typ)	20ms / 230VAC at full load
	VOLTAGE RANGE	100-132 VAC / 180-245VAC by switch
	FREQUENCY RANGE	50-60Hz
	EFFICIENCY (Typ)	82%
	AC CURRENT (Typ)	7A / 115 VAC 4A / 230VAC
	INPUT SURGE (Typ)	40A / 115VAC 60A /230VAC
	LEAKAGE CURRENT	<4.0mA / 240 VAC
	OVERLOAD	115-135% rated output power Protection Type: Hiccup mode, recovers automatically after fault condition
	OVER VOLTAGE	13.8-16.2V Protection type: hiccup mode, recovers automatically after fault condition is removed
	Each output has individual fuse and LED indicator, when fault occurs, it will only affect the individual output	
ENVIRONMENT	WORKING TEMP	-20 to +60
	WORKING HUMIDITY	20 to 90% RH non-condensing
	STORAGE TEMP, HUMIDITY	-20 to +85, 10 to 95% RH
SAFETY	SAFETY STANDARDS	CE approved
	MAX VOLTAGE BETWEEN CIRCUITS	I/P-O/P: 3KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC
OTHERS	DIMENSION	315 X 220 X 60mm

