


# Flip Flop Stepper Relay

## Technical Datasheet

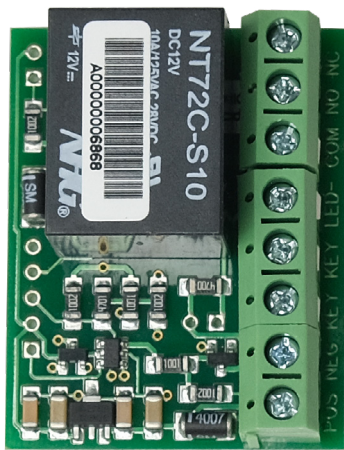

### Wiring Diagram

- +12v DC
- -12v DC
- KEY SW COM
- KEY SW N.O.
- LED - output
- Com relay contact
- N.O. relay contact
- N.C. relay contact

### Application:

- Arm disarm single zones.
- Any latching application.

### Specifications:

- Microprocessor controlled.
- 12v DC operation.
- Positive trigger input, pulse type.
- Negative LED output indicating state of relay.
- Potential free relay contacts, current rating 5A @ 12v.
- Current draw 10mA @ 12v DC.
- Physical size: 45mm x 41mm.

### Installation

- Connect +12v DC, key switch and LED wires.
- Activate key switch, LED and relay turn on, activate again and both turn off.