




Professional CCTV System 1080P Mini Camera

User Manual



Please Read This User Guide Carefully Before Use.




Warning



To prevent fire or electric shock hazard,
Only use specified power supply

CONNECTING CCTV SYSTEM

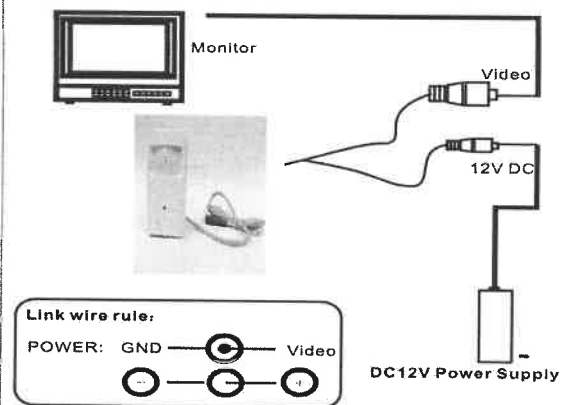

Specification

Model	XY-AHD8006 2.0MP PIRCAM 4IN1 V2
Sensor	1080P CMOS Image Sensor
System	PAL
Picture Elements	PAL:1920(H)*1080(V)
Horizontal Recolution	2.0 Megapixel
Video OutPut	Hybrid Video Output
S/N Ratio	≥48dB
Min.illumination	0LUX(IR ON)
Electronic Shutter	1/50(1/60)S~1/100,000S
White Balance	Auto
Gamma Ratio	>0.45
Lens Mount	3.7mm Pinhole lens
Operating Temp.	-10°C ~ +50°C
Humidity	0 to 95%RH(non-condensing)
Power/Current	DC 12V
Sync System	2:1 Interlace internal Sync.
IR Project Distance	N/A
IR Status	N/A
Outdoor/Indoor	Indoor

Packing list

Name	Model	Number
Digital CCTV Camera	XY-AHD8006 2.0MP PIRCAM 4IN1 V2	1
User Manual	XY-AHD8006 2.0MP PIRCAM 4IN1 V2	1

Changing the Setting on 4 in 1 camera

Hold button for 5 seconds according to table below to change setting.

Once set, remove power - Unit will now remain on new setting.

DIRECTION	UP	DOWN	RIGHT	LEFT
VIDEO	AHD	CVI	Analog(CVBS)	TVI

Note: Camera default setting is AHD.

Method to change to TVI:

Hold button to LEFT for approx 5 sec, camera will switch to TVI, pull out power from camera, camera will remain set to TVI.

Method to change to Analog (CVBS):

Hold button to RIGHT for approx 5 sec, camera will switch to Analog, pull out power from camera, camera will remain set to Analog.

Method to change to CVI:

Hold button to DOWN for approx 5 sec, camera will switch to CVI, pull out power from camera, camera will remain set to CVI.



Notes:

- *Please note the camera's operating temperature and its working environment. Avoid using the camera at too high or too low temperatures.
- *Never install the camera facing the direct sunlight or bright object, otherwise damage to the CCD will occur.
- *Don't mount the camera near a radiator or heater.