
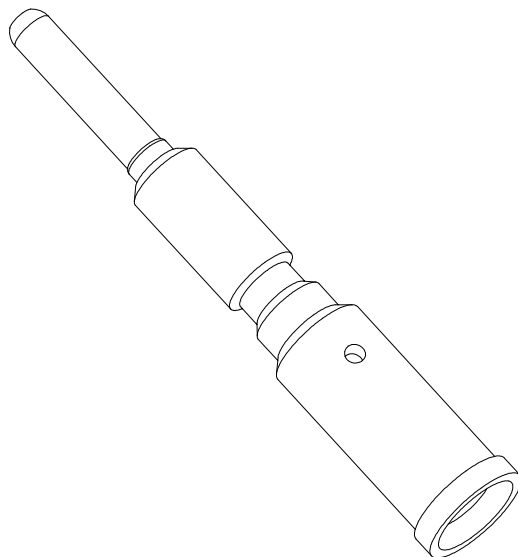




- 材料: 铜合金
- 表面处理: 镀金
- 额定电流: 20A
- 接触电阻: $\leq 5\text{m}\Omega$
- 工作温度范围: $-40^{\circ}\text{C} \dots +130^{\circ}\text{C}$
- 线径范围: $0.35\text{--}2.5\text{mm}^2$
- 可插拔次数: ≥ 500

- Material: copper alloy
- Surface: hard-gold plated
- Rated current: 20A
- Contact resistance: $\leq 5\text{m}\Omega$
- Limiting temperatures: $-40^{\circ}\text{C} \dots +130^{\circ}\text{C}$
- Wire gauge: $0.35\text{--}2.5\text{mm}^2$
- Mating cycles: ≥ 500

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	M17-MC20G-2.5
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1010202101002
绘图 Drawn	姓名/Name	日期/Date	标准化 Stand.	姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
	审核 Checked	ZH SU		16.03.2022	—	—	3:1	V1.0	1.0g		
工艺 Process	—	—	批准 Approved	HQ ZHANG	16.03.2022	 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	