



## SD-102 *Smart Home Light bulb Dimmer Socket Z-Wave Plus*

- Z-Wave Plus
- E27 to E14 screw type
- Dimmer Controls
- Longer Z-wave signal transmission
- AES 128 bit Z-wave encryption




### *Turn your light bulb into a smart device*

The SD-102 can turn your ordinary light bulb socket into a smart device. Not only you can control the light remotely using APP or voice commands. You can also create different lighting scenes for different occasions.

### *Automatically light up your atrium*

When installed with our SD-102 sensor, the light can turn on automatically when you come back to your house. You no longer have to look for the light switch in the dark.

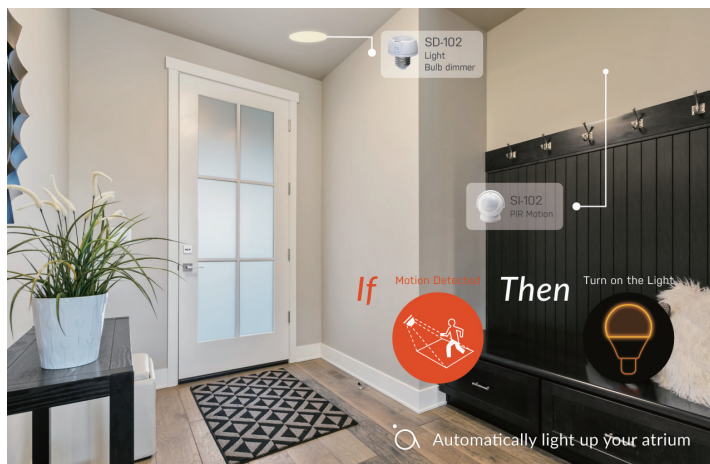




Voice Control

### Voice Control

The SD-102 works with Amazon Alexa or Google Home. So you can simply turn on or off the light by voice. It is that simple.

### Z-Wave Plus Technology

Unlike traditional WiFi which is prone to interference and obstacle issues. The Z-Wave plus is the best choice for smart home with its interference free frequency and MESH architecture. These technology insure reliable, energy saving, and uninterrupted connection for your smart home devices.

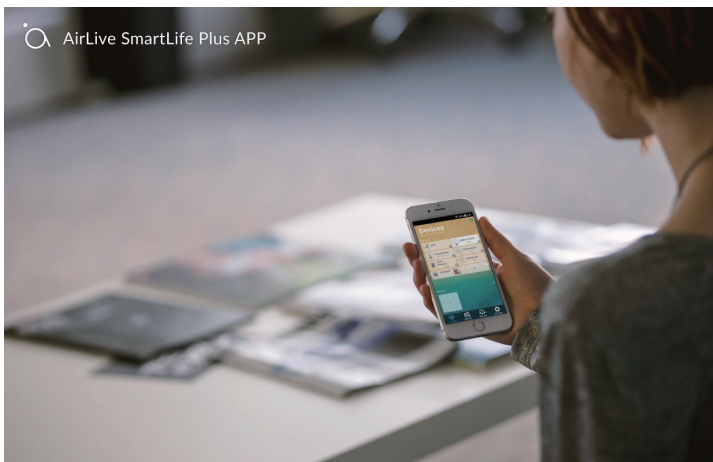

AirLive SmartLife Plus APP

### AirLive SmartLife Plus APP

The SmartLife Plus APP puts everything together in your smart home. You can view the reading or video of your device. The Scene manager let you design lighting and action for each room and occasions. The Macro allow you to set "If this then that" action. It allows you to tailor made your smart home to your need.

## Specifications

Model	SD-102 Smart Home Light bulb Dimmer Socket Z-Wave Plus
Z-Wave Standard	Z-wave plus
Z-Wave Frequency	CE : 868.40 MHz, 869.85 MHz FCC : 908.40 MHz, 916.00 MHz
Maximum transmission distance	40 M ( Indoor )
Maximum Load (Ampere)	1 A (Resistive load)
Maximum Output Current	0.1 A (Dimmable LEDS Bulbs)
Supply Voltage	110 - 230 VAC, 50 Hz
Maximum Wattage	200 W (for incandescent lamps) 20 W (for LED lamps)
Function	Dimmer Controls
LED Indicator	1 Red LED

## Dimension and Environment

Dimensions	49 * 49 * 55 mm
Operating Temperature	-10 ~ 40° C
Storage Temperature	85% RH max

## Ordering Information

Model	SD-102 Smart Home Light bulb Dimmer Socket Z-Wave Plus
-------	--

## Standard Package

Package Size	11.2 * 11.2 * 6.3 cm
Product Weight	0.061 kg
Package Weight	0.132 kg
Package Content	SD-102 * 1