


Product description	<b>M8 Female angled connector, Contacts: 3, 3.5-5.0 mm, unshielded, solder, IP67, UL 2238</b>
Area	<b>M8</b>
Coding	<b>A-coded</b>
Series	<b>768</b>
Part no.	<b>99 3402 00 03</b>


### Illustration



### Scale drawing



### Contact arrangement (Plug-in side)



You can find the assembly instructions on the next page.

## Technical data

### General features

Part no.	<b>99 3402 00 03</b>
Connector design	Female angled connector
Type standard	DIN EN 61076-2-104
Coding	A-coded
Version	Connector socket angled
Connector locking system	screw
Termination	solder
Degree of protection	IP67
Connection cross-section	0.25 mm <sup>2</sup> / AWG 24
Cable outlet	3.5-5.0 mm
Twistability	90° (4 coding options)
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	7.13
Customs tariff number	85369010
Country of Origin	DE

### Electrical parameters

Rated voltage	60 V (UL 30 V)
Rated impulse voltage	1500 V
Rated current	4.0 A
Pollution degree	3

# Product data sheet

## Automation technology - Sensors and actuators



Product description **M8 Female angled connector, Contacts: 3, 3.5-5.0 mm, unshielded, solder, IP67, UL 2238**

Area **M8**  
Coding **A-coded**  
Series **768**  
Part no. **99 3402 00 03**

Overvoltage category III  
Insulating material group III  
EMC compliance unshielded

### Material

Housing material PA  
Contact body material PA  
Contact material CuSn (bronze)  
Contact plating Au (gold)  
Locking material CuZn (brass)  
REACH SVHC CAS 7439-92-1 (Lead)  
SCIP number ea1e9bd9-59aa-48c6-8227-7625fcc2c763

### Authorization/approvals

Approvals UL 2238

### Classifications

eCl@ss 11.1 27-44-01-02  
ETIM 9.0 EC002635

### Declarations of conformity


Low Voltage Directive EN 60529:1991 | EN 60204-1:2018

Product description **M8 Female angled connector, Contacts: 3, 3.5-5.0 mm, unshielded, solder, IP67, UL 2238**

Area **M8**  
Coding **A-coded**  
Series **768**  
Part no. **99 3402 00 03**

### Assembly instructions

1. Bead pressing screw, pinch ring, seal and angled housing to cable.
2. Dismantle cable.
3. Strip and solder single wires.
4. Screw angled housing to male/female insert.
5. Push seal and pinch ring into angled housing.
6. Tighten pressing screw.

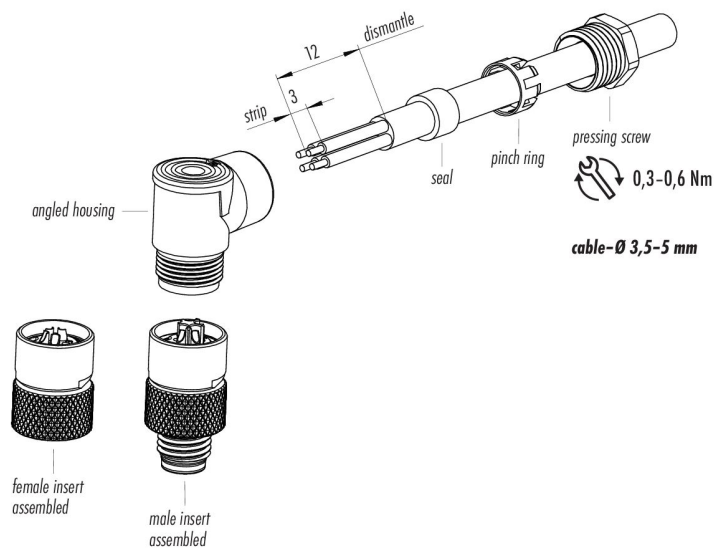

Product description	<b>M8 Female angled connector, Contacts: 3, 3.5-5.0 mm, unshielded, solder, IP67, UL 2238</b>
Area	<b>M8</b>
Coding	<b>A-coded</b>
Series	<b>768</b>
Part no.	<b>99 3402 00 03</b>

## Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).