
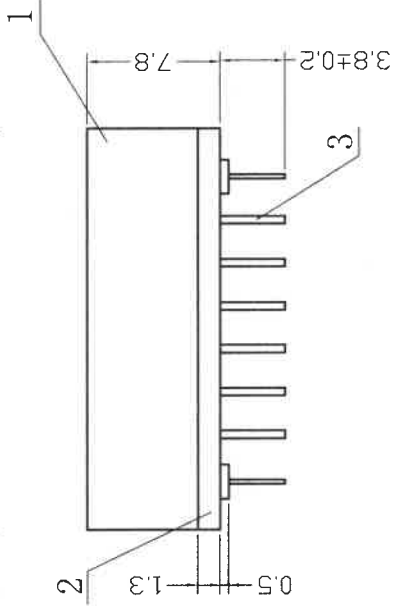


# PLCC-44C

序号/Rev.No.	名称/Title	文件编号/File No.
1	128脚件主体	
2	128脚件(盖)	
3	128端子(内排)	

**Specifications:**  
**Contact Resistance: 30mΩ max. at DC 100 mA**  
**Insulator Resistance: 1000 MΩ min. at DC 500V**  
**Current Rating: 1AMP**

**Dielectric Withstanding**  
**Voltage: AC50W For 1 minute**  
**Operating Temperature: -55° C--+105° C**  
**Contact: Brass or phosphor bronze**  
**Housing: 88% Glass Fiber(U.L. 94V-0)**

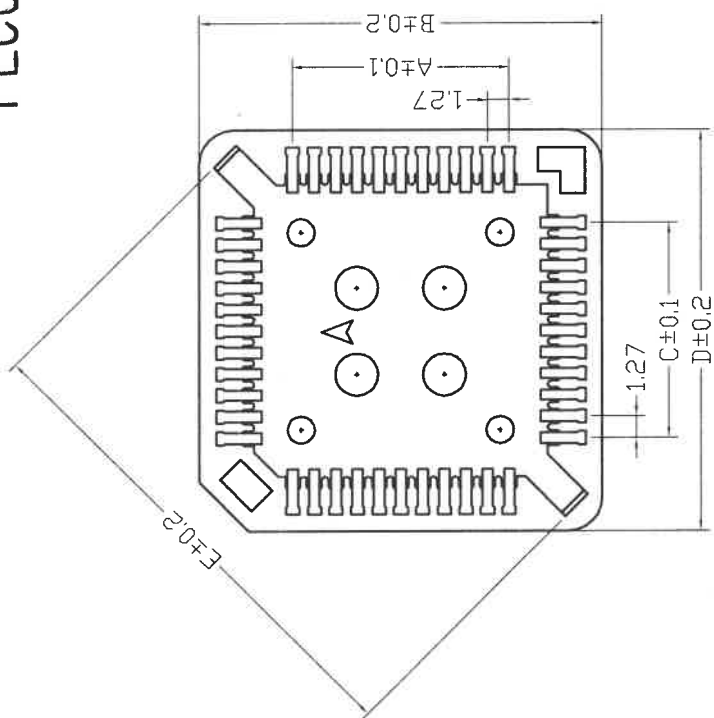

Position	A	B	C	D	E
28	7.62	18.3	7.62	18.3	21.0
32	10.16	21.2	7.62	18.7	23.4
44	12.7	23.5	12.7	23.5	29.0
52	15.24	26.0	15.24	26.0	33.0
68	20.32	31.0	20.32	31.0	38.5
84	25.4	36.9	25.4	36.9	46.2

要求:

**COMMUNICA (PTY) LTD**  
 A WORLD OF ELECTRONICS Reg. No. 1979/003717/12

■ HEAD OFFICE  
 Tel (012) 657-3500  
 Fax (012) 657-3550

■ CAPE TOWN  
 E-Mail: sales@communicaco.za  
 Web: www.communicaco.za  
 Tel (021) 447-0948  
 Fax (021) 447-0959

■ PRETORIA  
 Tel (012) 328-7008  
 Fax (012) 328-7018

相邻针之间相互平行。

审核/Checked by	批准/Approved by	公差/General Tolerance
图名/Title	文件编号/File No.	x: ±0.2 x': ±2' x: ±0.1 x': ±1' .xx ±0.05 .xx ±0.5' .xxx ±0.01
128产图	页序/Sheet	单位/units: mm
备注/Remark		

序号/Rev.No. 更改记录/Revision note 签名/Signature 日期/Date