

Triax Revolution in Xtraview Distribution

The Perfect RF OUT to RF OUT Solution

TRIAx

2 In 4 Out Active Splitter with built-in heartbeat




Specifications:

- Built-in Green LED indicator lights when power on.
- 2 input /4 outputs Bi-directional amplifier .
- Main Supply 12VDC/100mA from 12VDC IN or 9VDC/100mA from Input port
- The wave with 7.2MHz +-500KHz can be transmitted from the one Input to the other.

Specifications:

Item	Specification		
			QC Standard
Number of Inputs	2		
Number of Outputs	4		
Frequency Range (MHz)	FW	88~862	
	RE	5~30	
Gain	FW (dB)	8	8±2
	RE (dB)	7	7±2
Insertion loss Input1-Input2 (at 7.2MHz)	(dB)	5	<7
MAX output level @-60dB IMD	(dBμV)	93	>92
Return loss (IN & OUT)	(dB)	7	>6
Noise figure	(dB)	7	<7.5
Power Supply to each output	9±1 VDC/15mA		
Connectors(Inputs/Outputs)	F-(f)		
R.F. Shielded	YES		


Clearly the best!

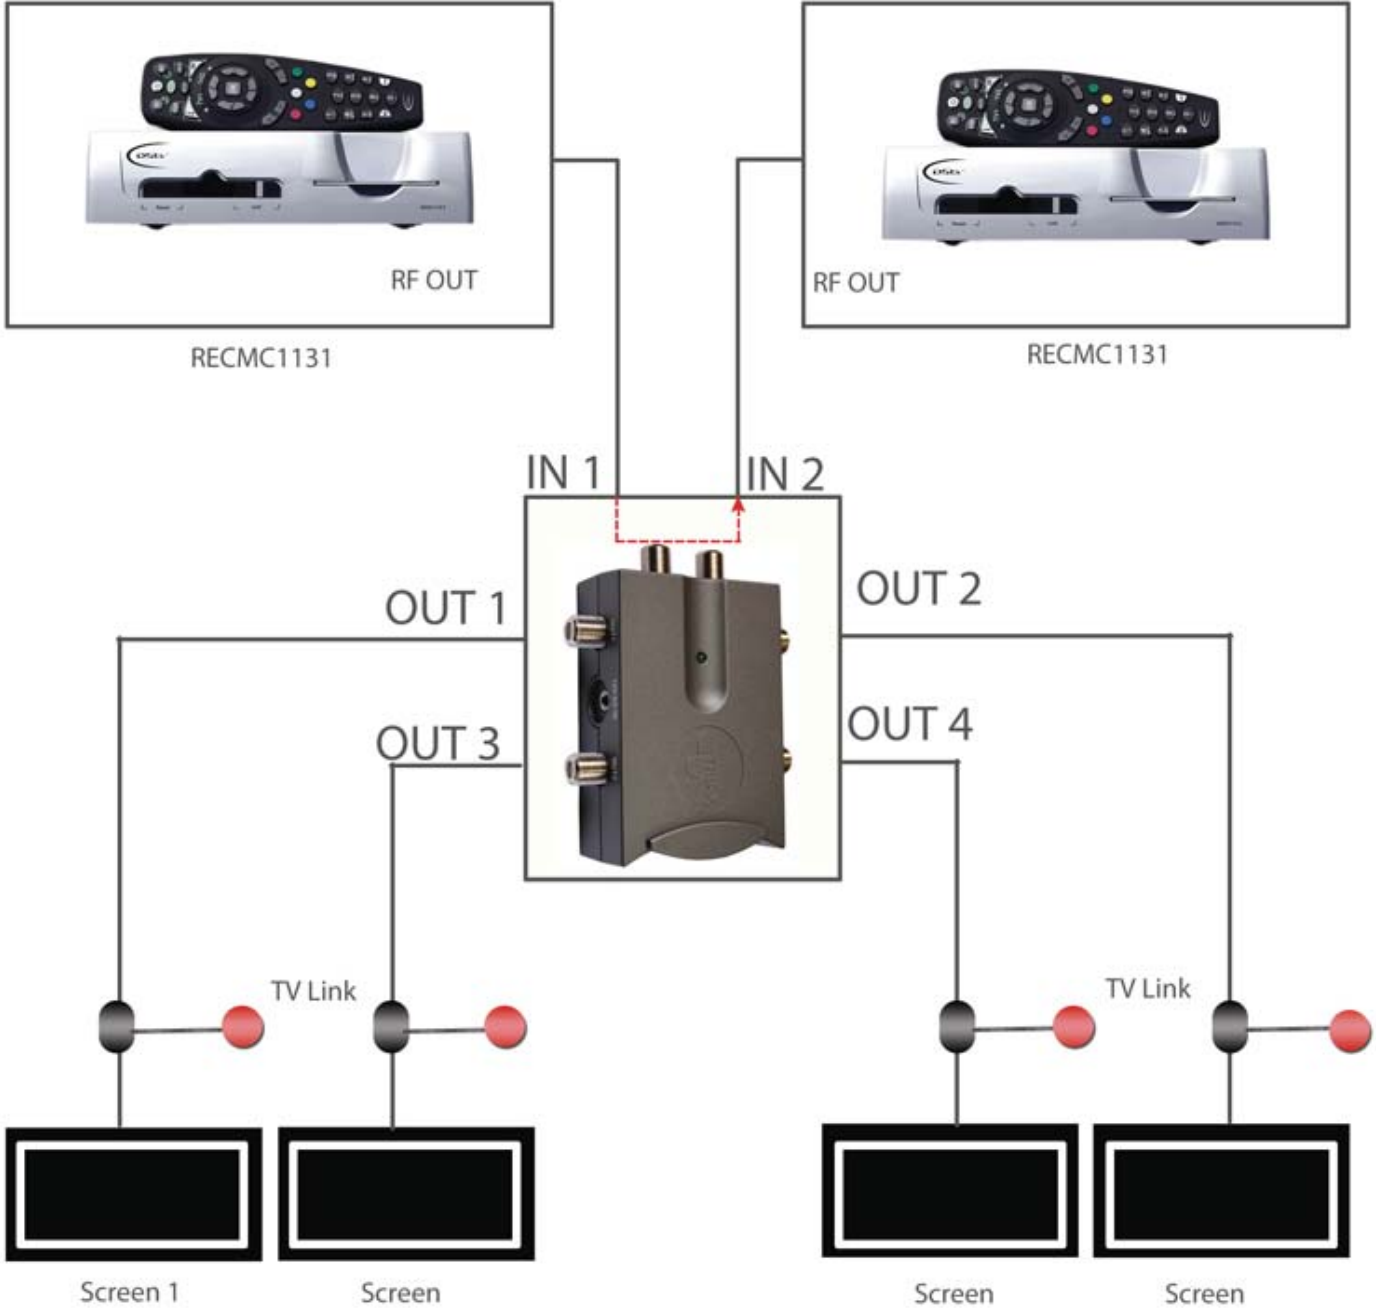

Xtraview Heartbeat




Clearly the best!

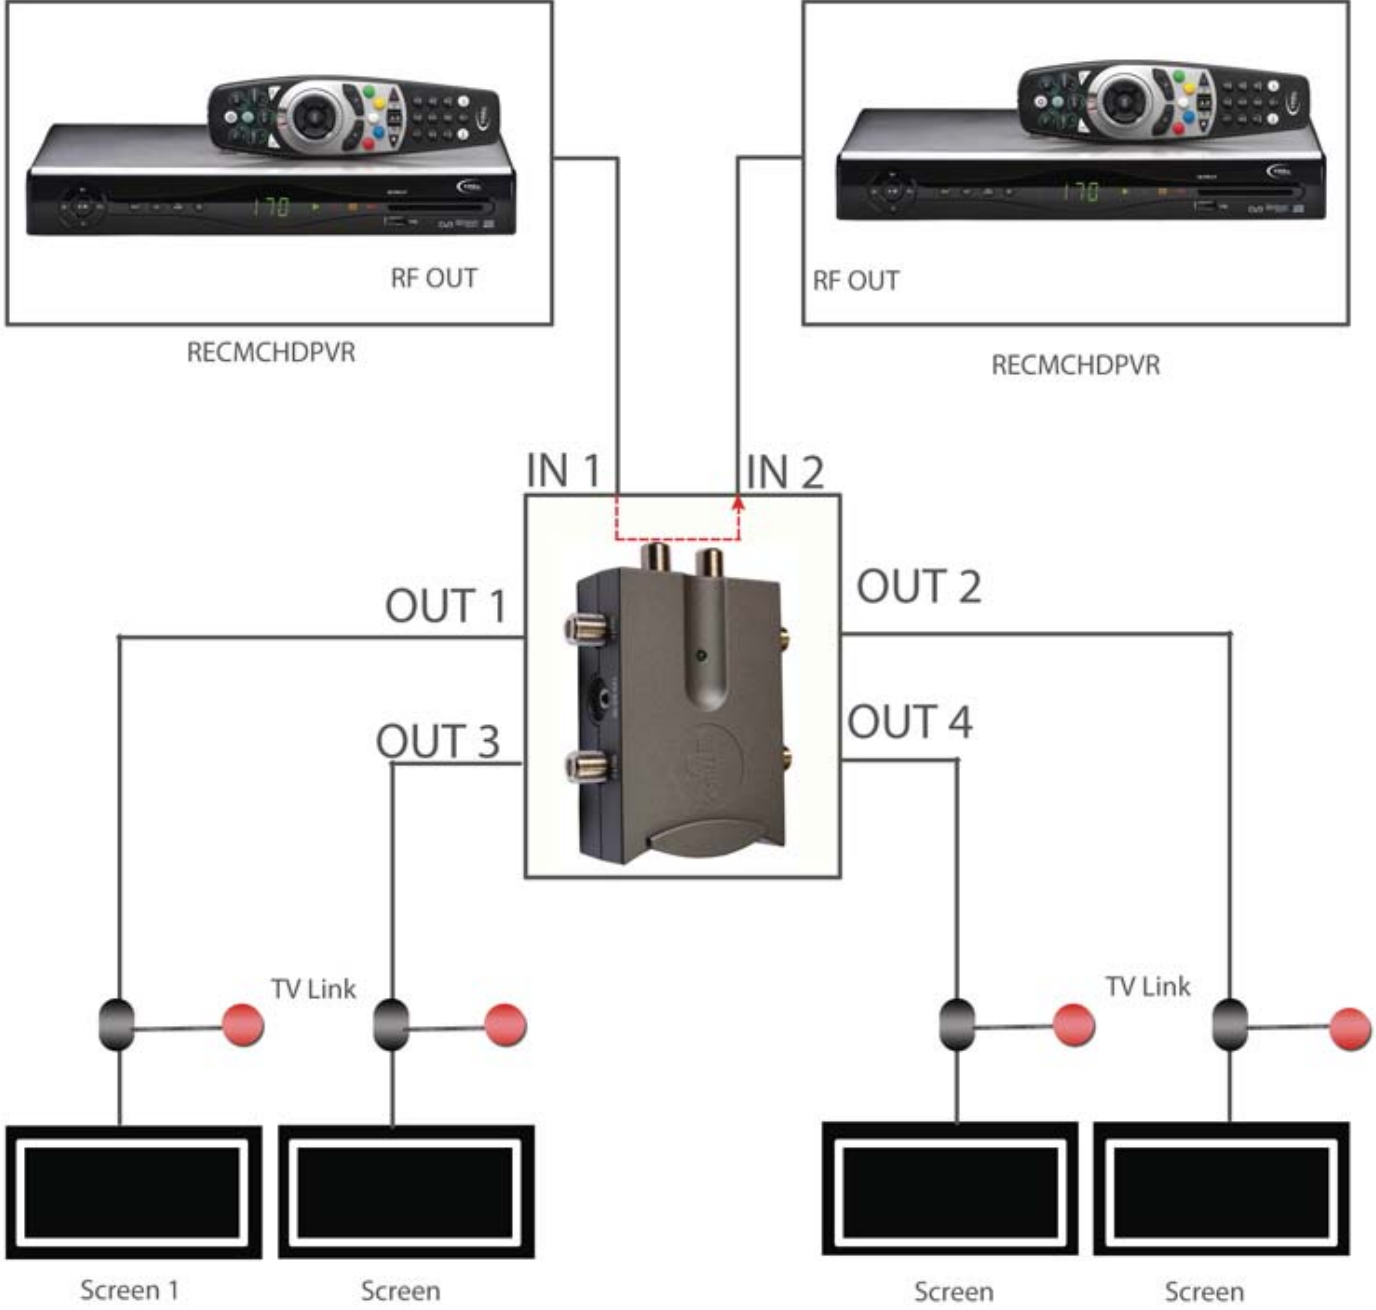

Xtraview Heartbeat



Clearly the best!

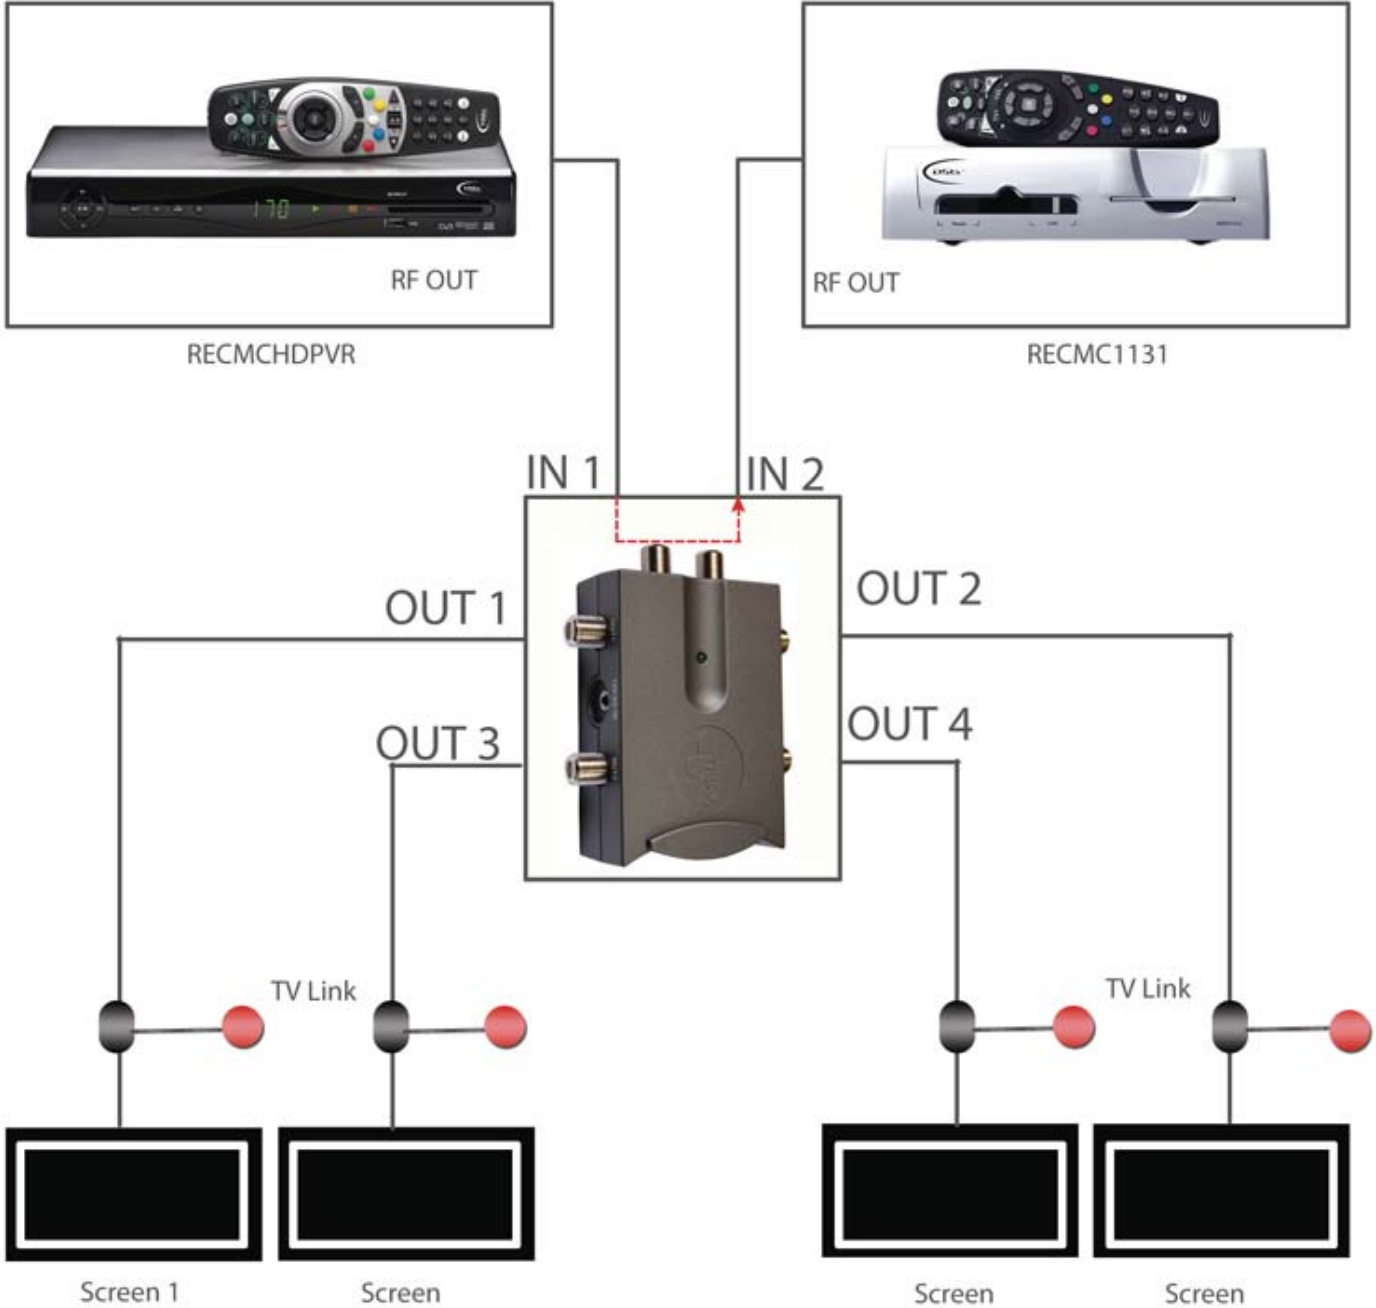

Xtraview Heartbeat

