

# THE POWERLINE SERIES

## Mini Econo PABX Filter

### Features

- Built in surge suppression
- High surge capability
- Compact design
- Effective filtration


The mini econo-pabx filter was designed to be more compact and cost effective solution to the standard pabx filter. The unit has a single stage filter capable of up to 30dB of attenuation of noise.

Also included is our standard surge module that will disconnect the load from the mains in the event of a fault thus preventing fire.

Another feature is the indication board that will notify the user when power is connected.

12-00911

rev1

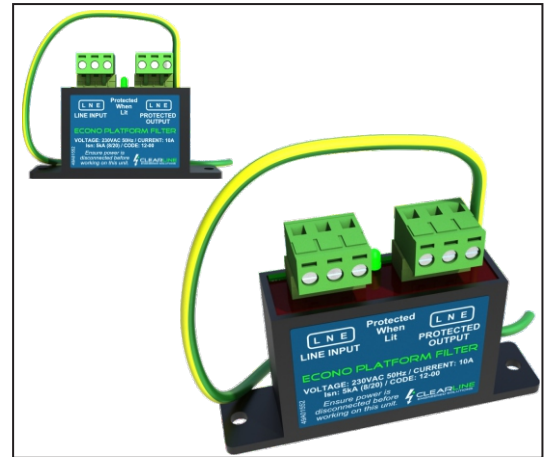

\*Specifications subject to change without prior notice due to continuous improvements

Specifications	
<b>Power Surge Protection</b>	
Nom. Input Voltage	230VAC 50Hz
Max. Continuous Current	10A
Max. Discharge Current	8kA L-N, L-E & 4.5kA N-E (8/20us)
Residual Voltage	<900V
Response Time	<25ns
Input Connectors	Male connector
Output Connectors	Male connector
<b>Other</b>	
Indication	LED
Temperature Range	-20°C to +70°C
Standard Compliance	IEC 164-1, 61643-1,
Lead Length	Earth 300mm
Dimensions	85x20x55mm
Weight	0.08kg

### Designed and Manufactured by:

#### Clearline Protection Systems (Pty) Ltd

385 Roan Crescent Corporate Park North, Old Pta Road,

Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1100

Fax: +27 (0) 11 314-3880

E-mail: [info@clearline.co.za](mailto:info@clearline.co.za)

[www.clearline.co.za](http://www.clearline.co.za)

