

HEAD OFFICE

Tel (012) 657-3500
Fax (012) 657-3550

E-Mail: sales@communica.co.za
Web: www.communica.co.za

CAPE TOWN

Tel (021) 447-0948
Fax (021) 447-0959



PRETORIA

Tel (012) 328-7008
Fax (012) 328-7018


嘉加

CANAL ELECTRONIC CO., LTD.




MR110-C3DBR

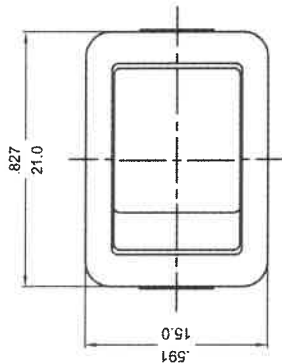

ROCKER SWITCH MODEL: MR SERIES
RATING: 16A 12VDC (CURUS/ENEC15)
DIELECTRIC WITHSTAND VOLTAGE: 1500VAC FOR 1 MINUTE
INSULATION RESISTANCE: 500VDC 100MΩ (MIN.)
CONTACT RESISTANCE: 20mΩ INITIAL (MAX.)
ILLUMINATED: LED 12VDC (Don't have to distinguish between the anode and cathode polarity)

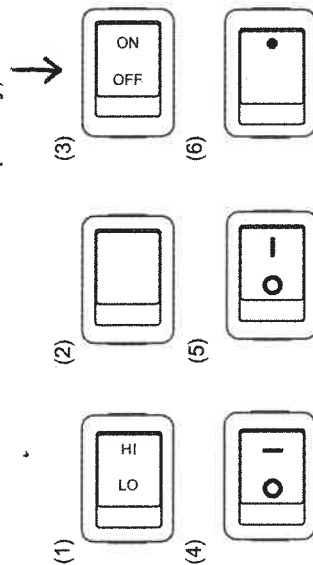

SCALE: 1:1

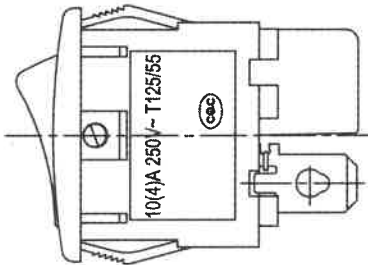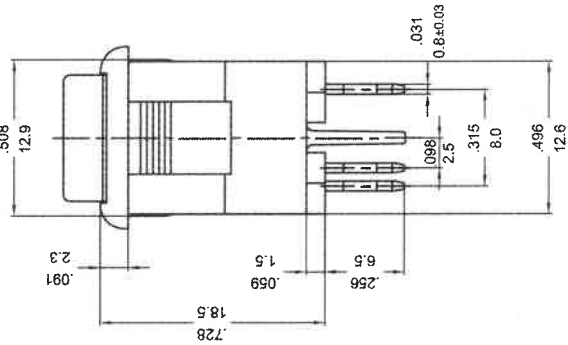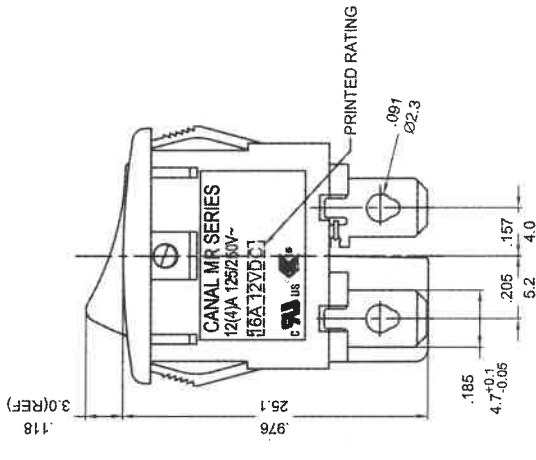

X(PANEL THICKNESS)	Y(CUTOUT DIMENSION)	Z(CUTOUT DIMENSION)
0.75~1.25mm	19.2 ^{+0.1} ₋₀ mm	12.90 ^{+0.15} ₋₀ mm
1.25~2 mm	19.4 ^{+0.1} ₋₀ mm	12.90 ^{+0.15} ₋₀ mm
2~3 mm	19.8 ^{+0.1} ₋₀ mm	12.90 ^{+0.15} ₋₀ mm

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ±.012/0.3 (in/mm)

PANEL CUTOUT DIMENSION TABLE

REVISION	DESCRIPTION	REVISED BY	TOLERANCES	DESIGNED BY	ANGLE	UNIT	PART NAME	MR SPEC DRAWING	DWG NO
A				楊偉超	蔡劍	5/3			
A				楊偉超	蔡劍	5/3			
A	修改印字	楊偉超		楊偉超	蔡劍	5/3			
A	首次出圖	楊偉超		楊偉超	蔡劍	5/3			
A	2025.07.01					2018.04.18	PART NO	MR-111C**-7**D-1LNC	S7414B
A	2018.04.18					2018.04.18	PART NO	MR-111C**-7**D-1LNC	S7414B