
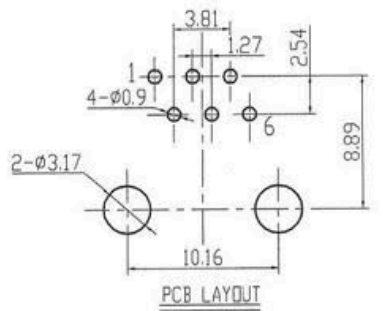
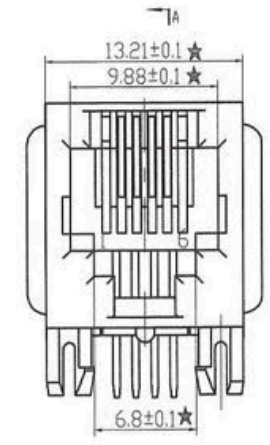
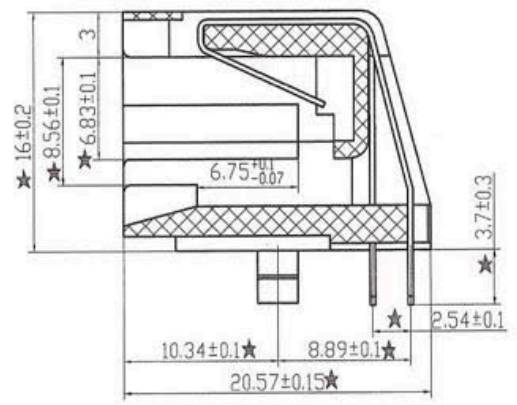


REV.	ECN NO.	DATE

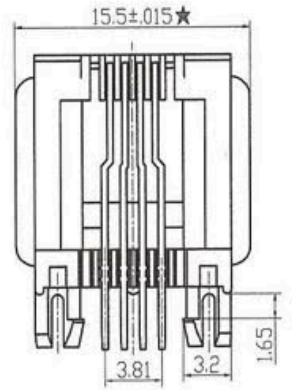

NOTE:
 1. ELECTRICAL:
 1.1 VOLTAGE RATING: 125 VAC RMS;
 1.2 CURRENT RATING: 1.5 AMP;
 1.3 CONTACT RESISTANCE: 20 MILLIOHMS Max;
 1.4 INSULATION RESISTANCE: 1000 MEGOHMS
 Min @500 VDC;
 1.5 DIELECTRIC STRENGTH: 1000 VAC RMS 50
 or 60Hz 1 Minute;
 2. MECHANICAL:
 2.1 HOUSING: PBT. UL94V-0. BLACK;
 2.2 TERMINALS: T0.36xW0.46 PHOSPHOR BRONZE
 PLATED 3u" Au;
 2.3 DURABILITY: 750 CYCLES Min.
 3.★Critical dimension.

RoHS Compliant

FIRST ANGLE PROJECTION	A 4	SCALE	UNIT	CUSTOMER:	TOLERANCES 0-15±0.15, 15-30±0.2, 30-±0.25 ANGLE±1°.	MATERIAL:	SEE NOTE	Designed:	DWG NO.:	C07082302	REV
		SIZE	2.5:1	mm		MODEL NO.:	FINISH:	SEE NOTE			
						SHEET	1 OF 1	Approved:			