




Specifications:  
 Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 1AMP

Dielectric Withstanding  
 Voltage: AC 500V For 1 minute  
 Operating Temperature: -55℃--+105℃  
 Contact: Brass  
 Housing: PBT & 30% Glass Fiber (UL 94V-0)

# 708401-32MM

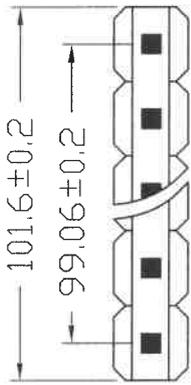

2.54

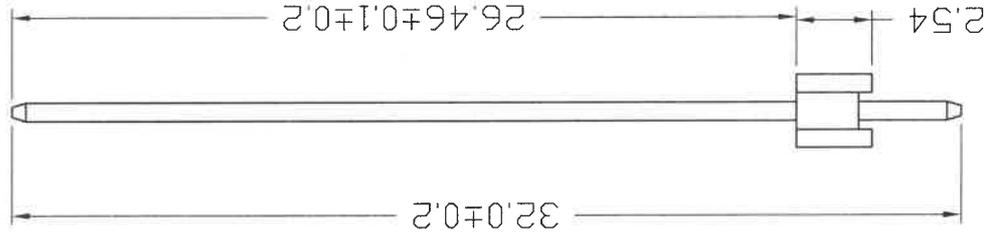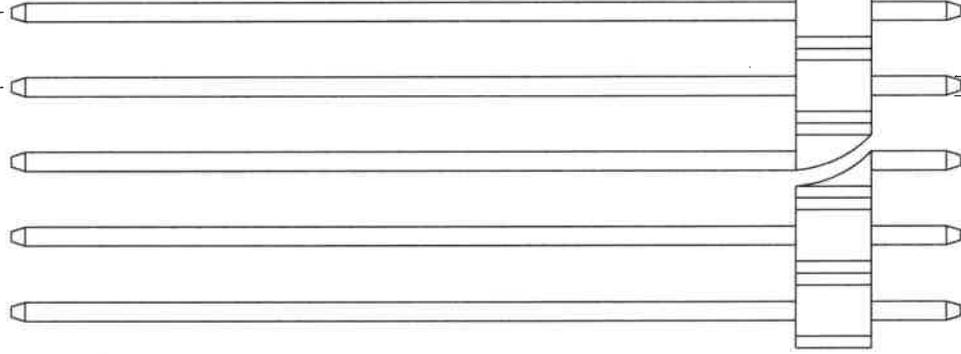

**COMMUNICA (PTY) (LTD)**  
 A WORLD OF ELECTRONICS      Reg. No. 1979/00371/707

■ **HEAD OFFICE**  
 Tel (012) 657-3500  
 Fax (012) 657-3550

E-Mail: [sales@communicaco.za](mailto:sales@communicaco.za)  
 Web: [www.communicaco.za](http://www.communicaco.za)

■ **CAPE TOWN**  
 Tel (021) 447-0948  
 Fax (021) 447-0959

■ **PRETORIA**  
 Tel (012) 328-7008  
 Fax (012) 328-7018

批准 / Approved by	未注公差
文件编号 / File No	General Tolerances
页序 / Sheet	X ± 0.2      K' ± 2'
	X ± 0.1      K ± 1'
	XX ± 0.05      KK ± 0.5'
	XXX ± 0.01
单位 / Units:	mm