
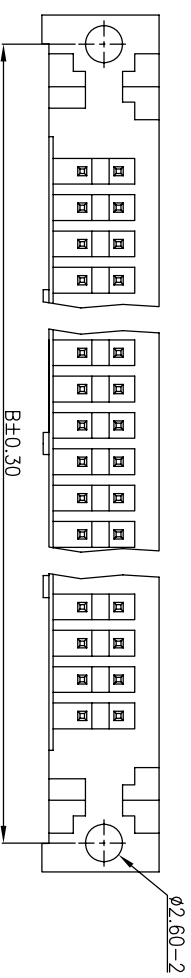
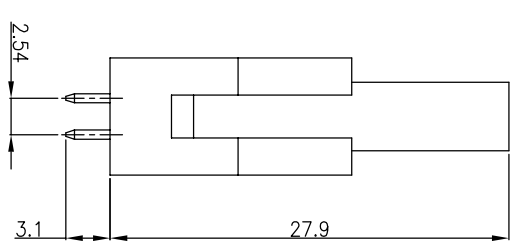
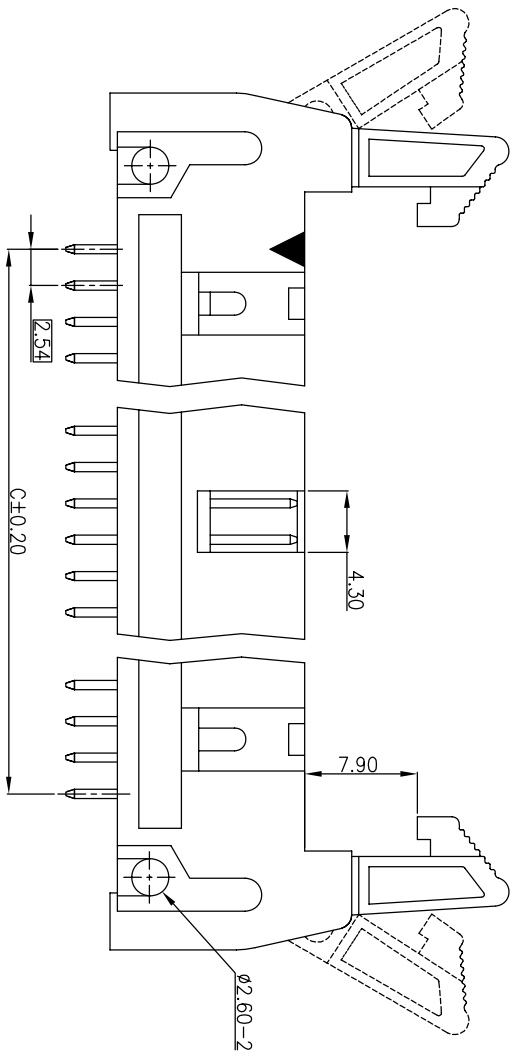
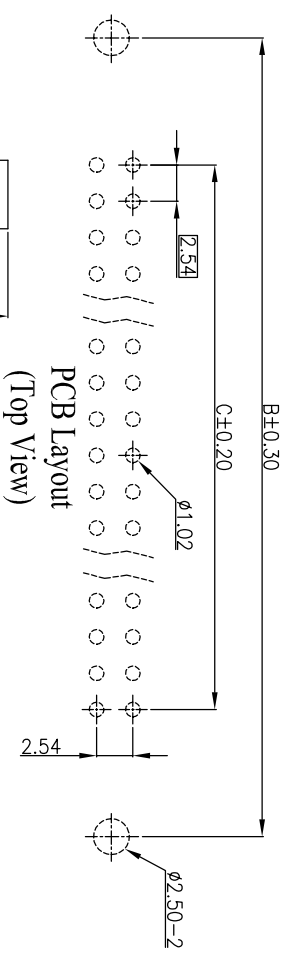


Rev.	Date	Description
A	2004/12/14	New Drawing
B	2005/04/14	Modify

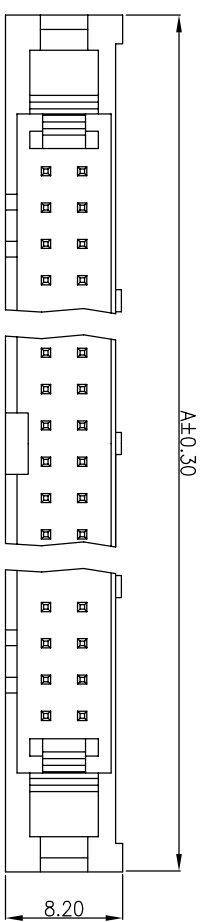

ROHS COMPLIANT

Order Information	Dimensions			
	Pos.	A	B	C
SCP10GSI-R	10	32.00	27.94	10.16
SCP14GSI-R	14	37.08	33.02	15.24
SCP16GSI-R	16	39.62	35.56	17.78
SCP20GSI-R	20	44.70	40.64	22.86
SCP24GSI-R	24	49.78	45.72	27.94
SCP26GSI-R	26	52.32	48.26	30.48
SCP30GSI-R	30	57.40	53.34	35.56
SCP34GSI-R	34	62.48	58.42	40.64
SCP40GSI-R	40	70.10	66.04	48.26
SCP50GSI-R	50	82.80	78.74	60.96

**Material and Finish**

- Housing: Thermoplastic (UL94V-0), Black.
- Terminal Sq. 0.64mm, Gold Plating.

**Electrical Characteristics**

- Current Rating: 3.0 Amp, Max.
- Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
- Insulation Resistance: 1000M Ohms Min. at 100V DC.

**Mechanical Characteristics**

- Operating Temperature: -55°C ~ +105°C

Scale	Unit	1:1	Drawn By	Checked By	Approved By
0:0	±0.30				
0:00	±0.20				
0:000	±0.10				

2.54mm Box Header Ejector Type  
PCB Mount Vertical With Latch



GTK UK LTD.