


**COMMUNICA**  
A World Of Electronics


**BOX HEADER 2.54mm(0.100" )**

Position	A	B	C	Position	A	B	C
10	20.30	18.10	10.16	30	45.70	43.50	35.56
12	22.84	20.64	12.70	34	50.78	48.58	40.64
14	25.38	23.18	15.24	40	58.40	56.20	48.26
16	27.92	25.72	17.78	50	71.10	68.90	60.96
20	33.00	30.80	22.86	60	83.80	81.60	73.66
26	40.62	38.42	30.48	64	88.88	86.68	78.74

**[STRAIGHT] 716 series**

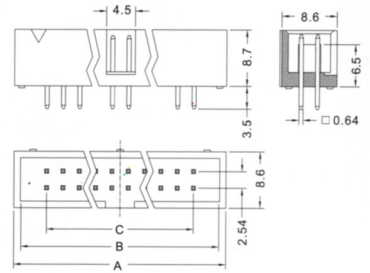

**[RIGHT ANGLE] 717 series**

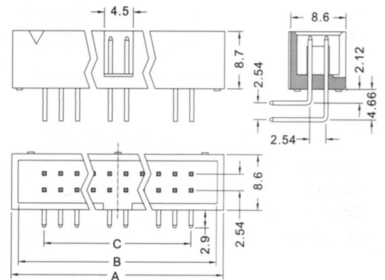

**Specifications:**

Contact Resistance: 30mΩ max.at DC 100 mA  
Insulator Resistance: 1000MΩ min.at DC 500V  
Current Rating: 1AMP

**Dielectric Withstanding**

Voltage: AC 500V For 1 minute  
Operating Temperature: -55° C +105° C  
Contact: Brass  
Housing: PBT &30% Glass Fiber(UL 94V-0)

 **XYTRON**