



日期/Date	档案员 Filing Clerk	1		2		3		4		5							
		产品代号 Part code	产品料号 Part NO.	线径/Wire Gauge		d	D	剥线长度 Stripping length	标识 Identification	标识图 Identification No.	重量/Weight g	No.	No.1	No.2	No.3	No.4	No.5
				mm ²	AWG							标示图 Marked Graph					
ZCEGF-0.37G	1010192200311	0.14-0.37	26-22	0.90	1.8	7.5	no groove	No.1	1.37	标示图 Marked Graph							
ZCEGF-0.5G	1010192200411	0.5	20	1.15	2.6	7.5	no groove	No.1	1.52								
ZCEGF-0.75G	1010192200611	0.75	18	1.30	2.6	7.5	1 groove	No.2	1.54								
ZCEGF-1.0G	1010192200811	1.0	18	1.45	2.6	7.5	1 groove	No.3	1.54								
ZCEGF-1.5G	1010192200911	1.5	16	1.75	3.0	7.5	2 groove	No.4	1.58								
ZCEGF-2.5G	1010192201011	2.5	14	2.25	3.5	7.5	3 groove	No.5	1.62								
ZCEGF-3.0G	1010192201111	3.0	12	2.55	3.7	7.5	wide groove	No.6	1.54								
ZCEGF-4.0G	1010192201211	4.0	12	2.85	3.9	7.5	no groove	No.1	1.55								

技术参数:

- 材料: 铜合金
- 表面处理: 镀金
- 额定电流: 16A
- 接触电阻: $\leq 1m\Omega$
- 线径范围: 0.14-4.0mm²(26-12 AWG)
- 可插拔次数: ≥ 500

Technical specification:

- Material: copper alloy
- Surface: hard-gold plated
- Rated current: 16A
- Contact resistance: $\leq 1m\Omega$
- Wire gauge: 0.14-4.0mm²(26-12 AWG)
- Mating cycles: ≥ 500

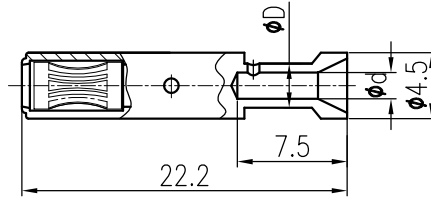

标记 Mark		处数 Number	变更描述/Description		姓名/Name	日期/Date	表面处理 Finish		图号 Drawing No.	
							-		-	
							材料 Material		产品代号 Part Code	
							-		ZCEGF-XX	
							比例 Scale		产品料号 Part No.	
							2:1		-	
							版本 REV.		产品名称 Part Name	
							V1.0		-	
							重量 Weight		-	
							-		-	
							数量 Qty.		-	
							-		-	
工艺 Process							批准 Approved		All Dimensions in mm Original Size DIN A 4	
							YY LIN		18.10.2010	
									厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	