


UTD2000L SERIES Digital Storage Oscilloscopes

UNI-T®

UTD2025CL / UTD2052CL

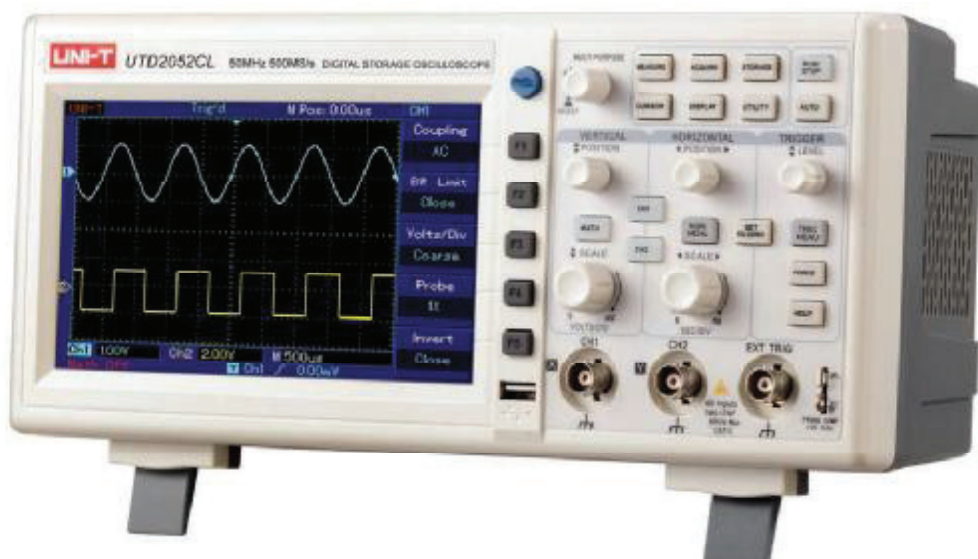

SPECIFICATIONS

Specifications	UTD2025CL	UTD2052CL
Channels	2	2
Bandwidth	25MHz	50MHz
Sample Rate	250MS/s	500MS/s
Rise Time	≤14ns	≤7ns
Memory Depth	25kpts	25kpts
Waveform Acquisition Rate	≥2000wfms/s	≥2000wfms/s
Vertical Sensitivity	1mV/div~20V/div	1mV/div~20V/div
Time-Based Range	10ns/div~50s/div	5ns/div~50s/div
Storage	Setup,Wave,Bitmap	Setup,Wave,Bitmap
Trigger Modes	Edge, Pluse, Video, Alternate	Edge, Pluse, Alternate
Interfaces	USB OTG,Pass/Fail	USB OTG

GENERAL CHARACTERISTICS

Power	100-240VAC, 45-440Hz
Display	7 Inches TFT LCD,WVGA (400×240)
Product Color	White and Gray
Product Net Weight	2.2 Kg
Product Size (W×H×D)	306mm × 134mm × 122mm
Standard Accessories	Probe×2 (1×, 10× switchable), Power Cord, USB Cable, PC Software CD
Standard Individual Packing	Gift Box, English Manual
Standard Quantity Per Carton	2 PCs
Standard Carton Measurement (L×W×H)	450mm × 420mm × 280mm
Standard Carton Gross Weight	8.3 Kg