
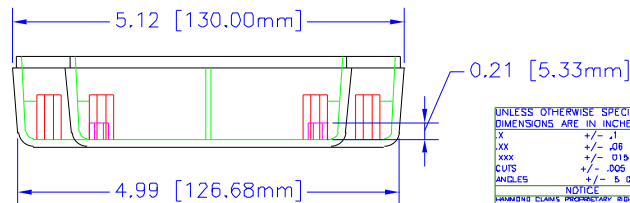
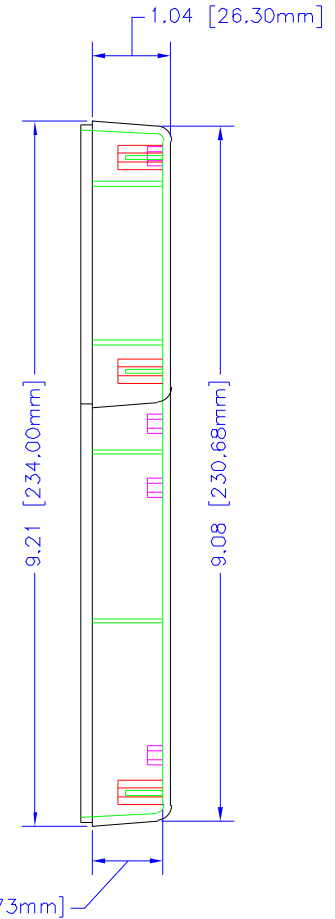
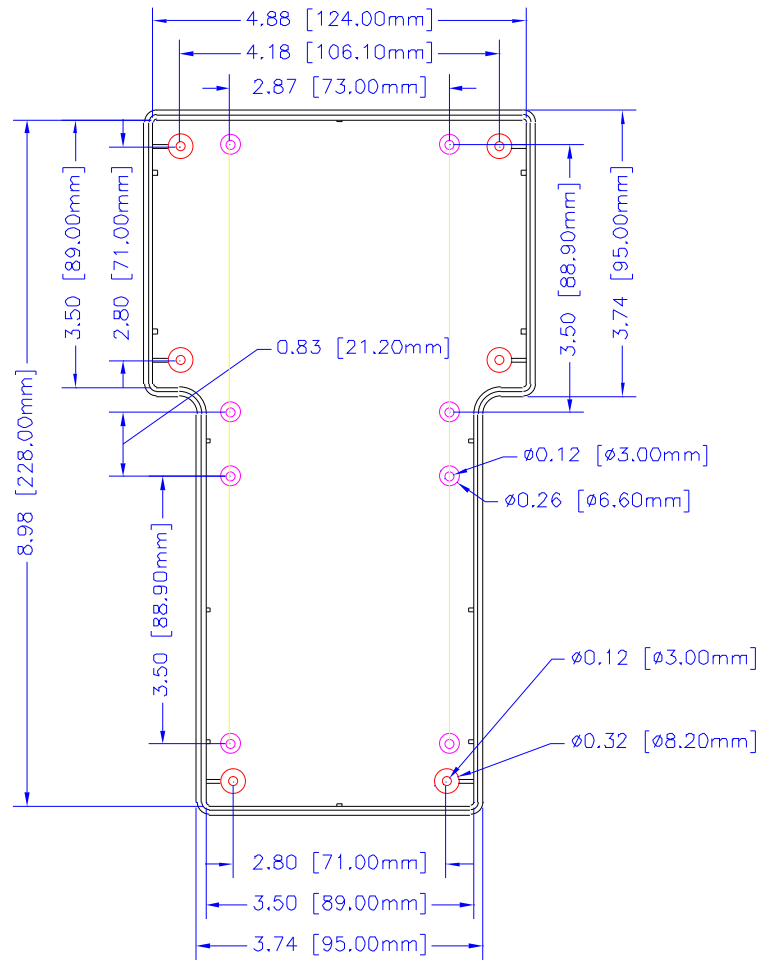



NOTES

- MATERIAL (ABS) FLAME RETARDANT UL94 V0 MATERIAL WITH BRASS INSERTS IN ALL POSTS. LENS IS CLEAR POLYCARBONATE.
- PARTS (ABS) VERSION MACHINE SCREWS M3-0.5 x 18mm. REPLACEMENT PN 1594MS100 (100 / BAG).
- COLORS BLACK, OR GRAY



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

X +/- .1
XX +/- .06
XXX +/- .015
SURF +/- .005
ANGLES +/- .5 DEC

NOTICE
HAMMOND MANUFACTURING RESERVES THE
RIGHT TO THE MATERIAL ON THIS DRAWING. IT IS
INTENDED TO BE USED AS A REFERENCE FOR
ENGINEERING INFORMATION ONLY. THIS
INFORMATION MAY NOT BE USED TO
MANUFACTURE PRODUCTS WITHOUT WRITTEN
PERMISSION FROM HAMMOND MANUFACTURING



HAMMOND
MANUFACTURING

WEB: WWW.HAMMONDMFG.COM


| | | | |
|-------------|-----|---|----------|
| TITLE | | HAMMOND 1592 SERIES INSTRUMENT ENCLOSURE | |
| DRAWN BY | MJM | DATE | 01/27/01 |
| SCALE | | PAGE | 1 OF 2 |
| PART NUMBER | | 1592ETCD | |

NOTES

MATERIAL (ABS) FLAME RETARDANT UL94 V0 MATERIAL WITH BRASS INSERTS IN ALL POSTS. LENS IS CLEAR POLYCARBONATE.

PARTS (ABS) VERSION MACHINE SCREWS M3-0.5 x 18mm. REPLACEMENT PN 1594MS100 (100 / BAG).

COLORS BLACK, OR GRAY

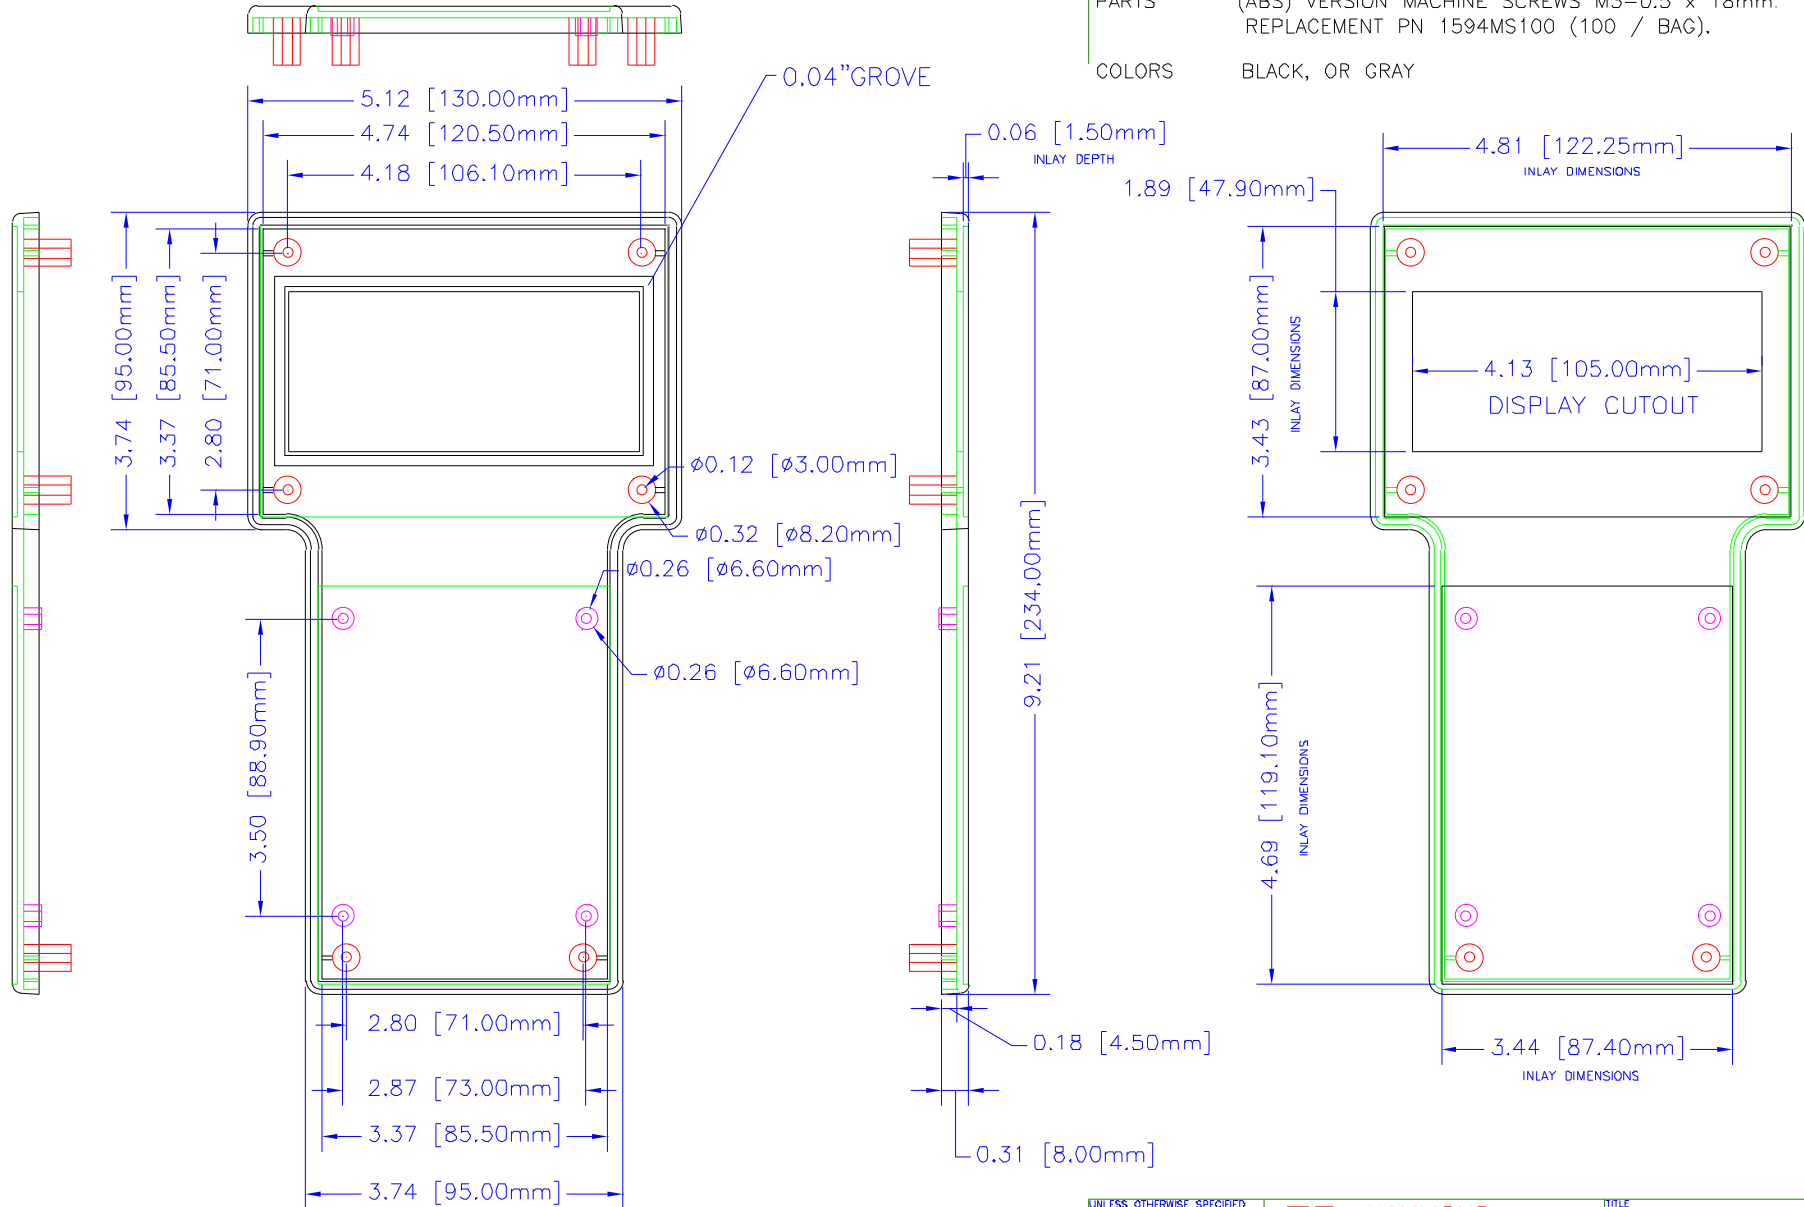

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

| | |
|--------|-------------|
| X | +/- .1 |
| .XXX | +/- .06 |
| .XXX | +/- .015 |
| CUTS | +/- .005 |
| ANGLES | +/- .5 DEG. |

NOTICE
HAMMOND TAKES PROPRIETARY RIGHTS TO THE MATERIAL ON THIS DRAWING. IT IS INTENDED TO BE USED AS A REFERENCE FOR ENGINEERING INFORMATION ONLY. THIS INFORMATION MAY NOT BE USED TO MANUFACTURE PRODUCT WITHOUT WRITTEN PERMISSION FROM HAMMOND MANUFACTURING.



**HAMMOND
MANUFACTURING**

WEB: WWW.HAMMONDMFG.COM

| | |
|--|------------------|
| TITLE HAMMOND 1592 SERIES INSTRUMENT ENCLOSURE | |
| DRAWN BY MJM | DATE 01/27/01 |
| SCALE | PAGE 2 OF 2 |
| PART NUMBER 1592ETCD | |