



AS-i Power 5A 120 V/230 V AC AS-Interface power supply unit, IP20 IN: 120 V / 230 V AC OUT: AS-i, 5 A (30 V DC), IP20 with integrated ground fault detection, with integrated overload detection with AS-i data decoupling

Efficiency/ heat loss		
power loss [W] maximum	W	25.2
Safety related data		
protection class IP		IP20
Ambient conditions		
ambient temperature		
• during operation	°C	-10 ... +70
• during storage	°C	-25 ... +80
fastening method		fixing on standard mounting rail DIN EN 59 022-35 x 7.5 mm snap-on
width	mm	70
height	mm	125
depth	mm	125
Environmental footprint		
Environmental Product Declaration(EPD)		Yes
global warming potential [CO2 eq] total	kg	785
global warming potential [CO2 eq] during manufacturing	kg	20.7
global warming potential [CO2 eq] during sales	kg	0.127
global warming potential [CO2 eq] during operation	kg	763
global warming potential [CO2 eq] after end of life	kg	0.565
Certificates/ approvals		
General Product Approval		EMV



EMV	Maritime application	other	Environment		
KC			Confirmation	Miscellaneous	
Environment		Industrial Communication			



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RX9502-0BA00>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RX9502-0BA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RX9502-0BA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RX9502-0BA00&lang=en

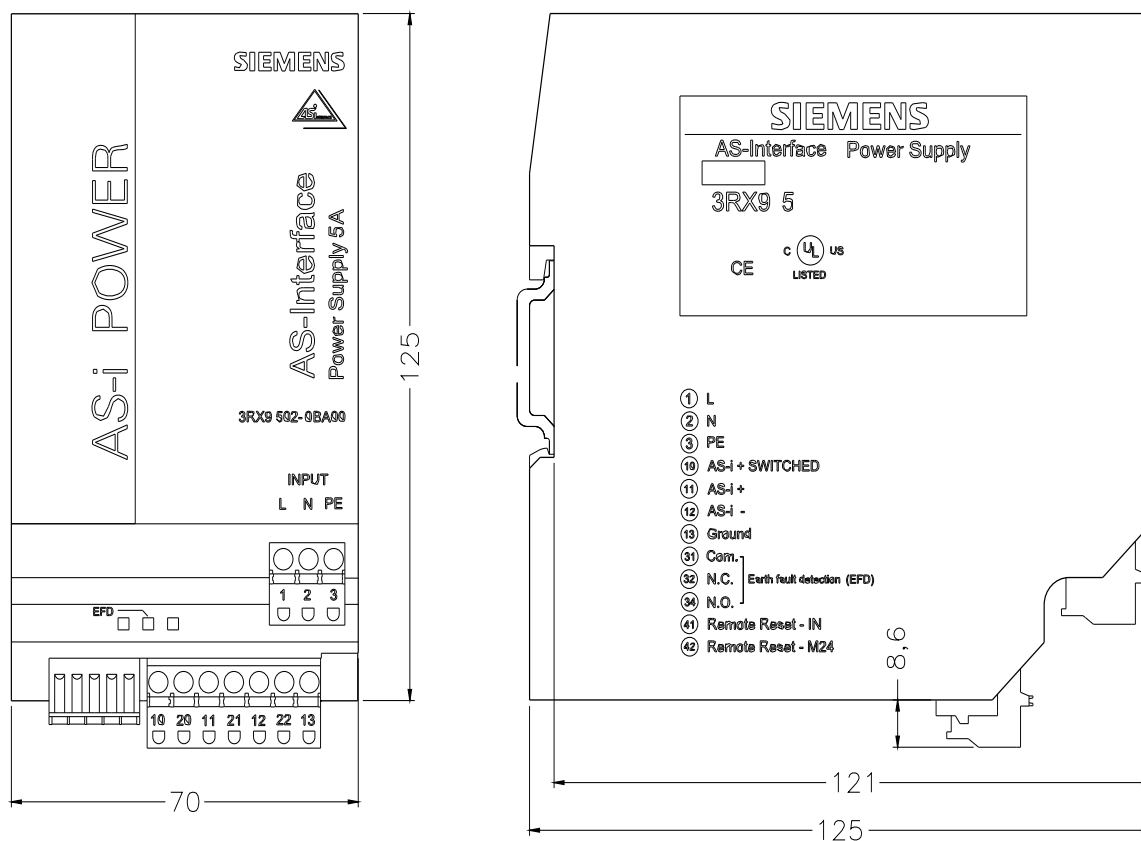

last modified:

5/1/2025