




AS3P(ST3P)

**Features**

Used to control time sequence  
With front / back connecting socket  
LED display

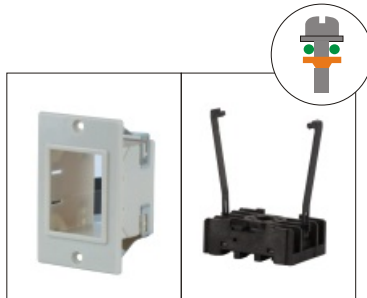


Matched panel      Matched socket

**Specification**

Voltage	DC12V~48V, AC12V~380V50Hz/60Hz
Power expend	DC1.0W, AC1.0VA
Control output	3A 220VAC
Insulation resistance	DC500V, 100MΩ
Dielectric strength	BCC1500VAC, BOC1000VAC
Operating temperature	-10°C ~ 50°C
Humidity	35% ~ 85%
Life	Mech:10 <sup>7</sup> , Elec:10 <sup>3</sup>
Weight	≈50g

**Type**

Time relay AS3P

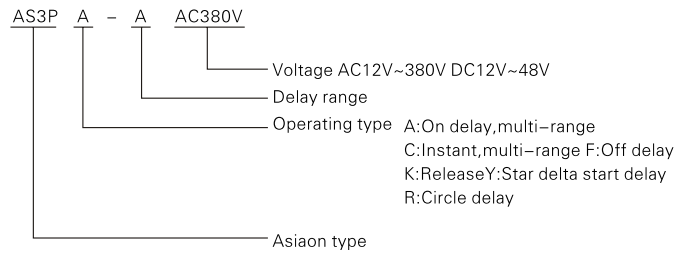

**Time range**

Delay type	Switch position			
	1	2	3	4
A	0.05-0.5s	5s	2.5-30s	0.25-3m
B	0.1-1s	1-10s	5-60s	0.5-6m
C	0.5-5s	5-50s	50m	2.5-30m
D	1-10s	10-100s	10m	5-60m
E	5-60s	1-10m	60m	0.5-6h
F	0.25-2m	2.5-20m	2h	1-12h
G	0.5-4m	5-40m	4h	2-24h

**Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)**

