


COM3M-WPM

4x4 Waterproof Matrix Keypad with 16 Metal Alpha-numeric Keys


Specifications

- Contact Rating : 20mA,24VDC
- Contact Resistance : 200 ohm max
- Life : 1,000,000 cycles per key
- Operating Temperature : -20~+60°C

Storage Temperature : -40~+65°C

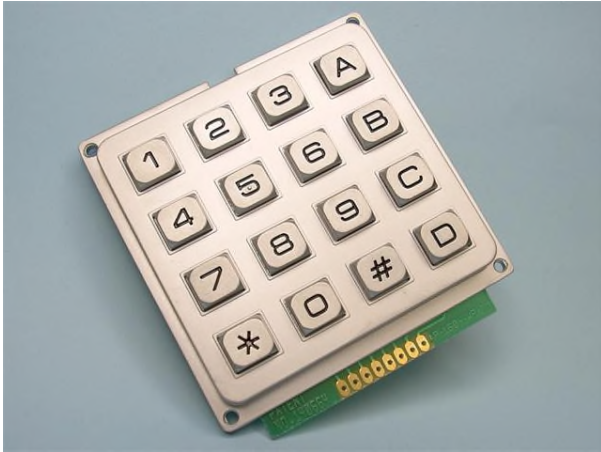


CIRCUIT DIAGRAM

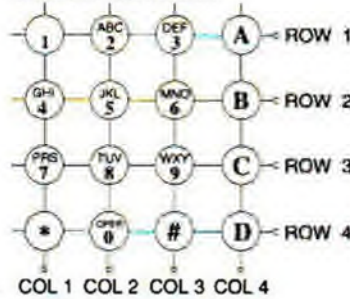

AK-1604

OUTPUT ARRANGEMENT	
OUTPUT PIN NO.	SYMBOL
1	COL 1
2	COL 2
3	COL 3
4	COL 4
5	ROW 1
6	ROW 2
7	ROW 3
8	ROW 4

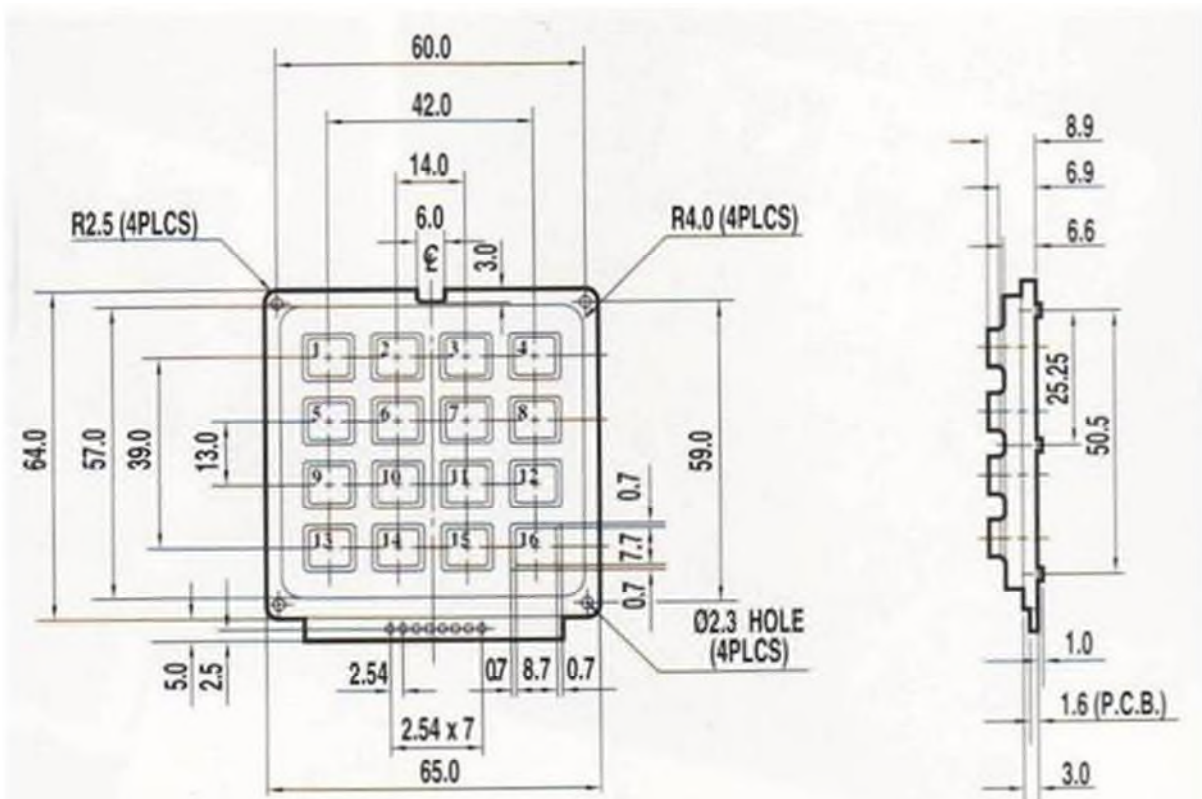

ACTUATING FORCE: 100 ± 30 GRAMS.
STROKE: 1.5 ± 0.5 mm.