


# 4771 Series

## Housing 3.96mm(0.156")

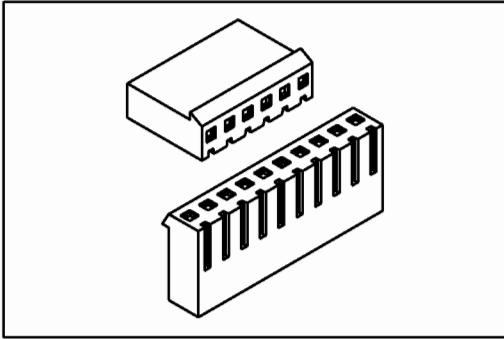





**Material:**  
**Housing:** Nylon 66 Flame retardant UL94V-2.  
**Contacts:** Brass.  
**Terminal Plating:** Tin plated.  
**Recommend wire:** 18AWG to 24AWG.

**Electrical Characteristics:**  
**Insulator Resistance:** 5000MΩmin. at DC 500V.  
**Contact Resistance:** 20mΩmax. at DC 100mA.  
**Operating Temperature:** -25°C~+85°C.  
**Current rating:** 18AWG - 7.0AMP.  
 20AWG - 6.5AMP.  
 22AWG - 5.5AMP.  
 24AWG - 4.0AMP.

**Features:**

- \* Available in single row 2 through 20 position.
- \* Box design terminal order separately.
- \* Side-to-side and end-to-end stackable.

Mates with: 4771 wafer.

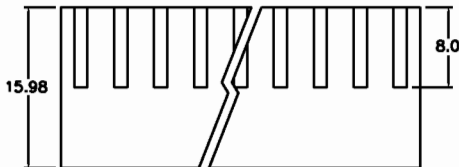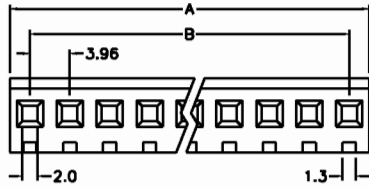

Position	2 Thru 20
Dimension	
A	3.96 X No. of Positions +0.6
B	3.96 X No. of Positions -3.96

### Ordering information

4771- 20 H B  
 Series No. of Position H: Housing B: Bulk Package

4771- Pin-T-6K  
 T: Tin Plated 6K Pins Per Reel