


Specifications:
 Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature: -55 °C--+105 °C
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

708401-2T-21MM

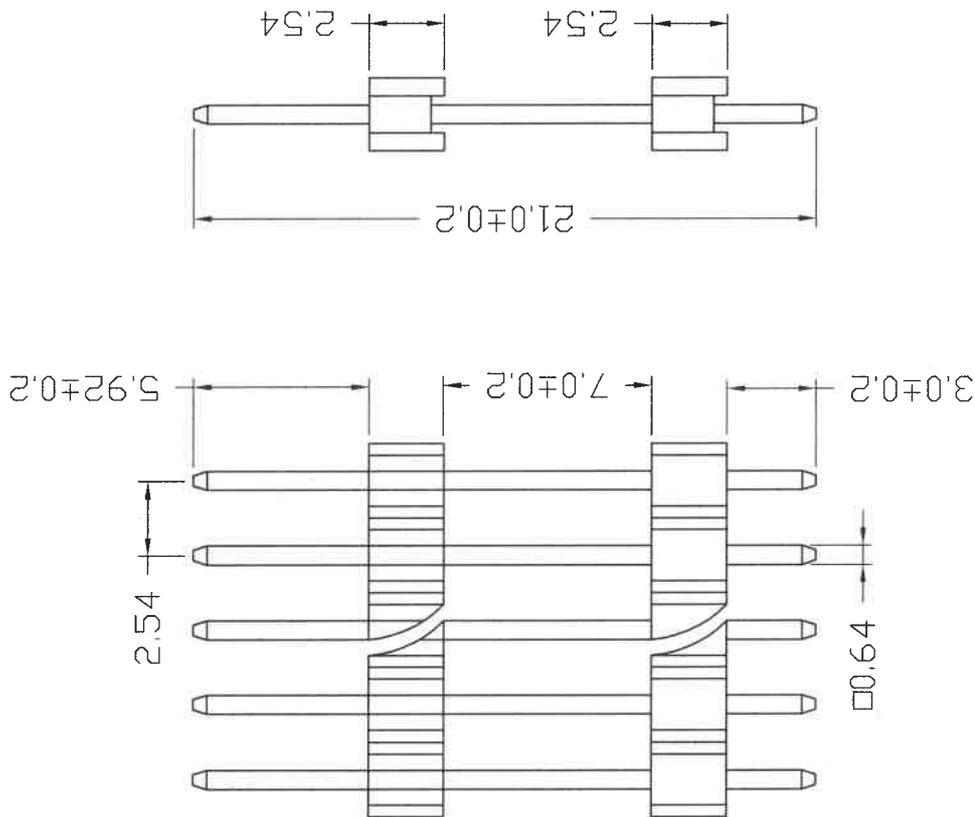

COMMUNICA (PTY) (LTD)
 A WORLD OF ELECTRONICS

Reg. No. 1979/003717/07

HEAD OFFICE

Tel (012) 657-3500

Fax (012) 657-3550

E-Mail: sales@communicaco.za

Web: www.communicaco.za

CAPE TOWN

Tel (021) 447-0948

Fax (021) 447-0959

批准 Approved by	末江公差
文件编号 File No	General Tolerance
页序 Sheet	K ± 0.2 X ± 0.1 XK ± 0.05 XX ± 0.01
	K ± 2 X ± 1 XK ± 0.5 XX ± 0.1
	单位 Units: mm