


Arrangement of Contact

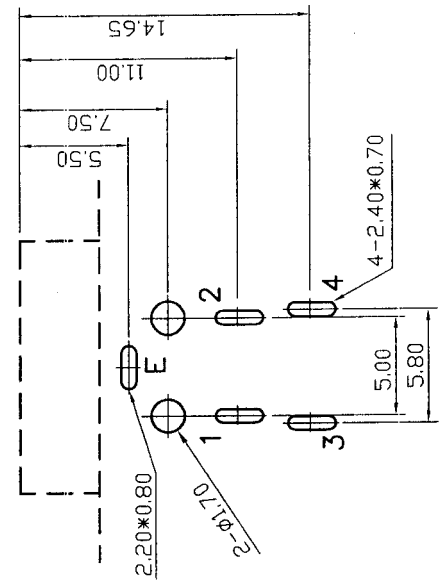

Pin Hole Layout
<Jack Bottom View>

4.	Terminal	0.3T Brass	4	Silver Plated
3.	Inner shield	0.4T Brass	1	Nickel Plated
2.	Cover	PBT	1	Black Color
1.	Housing	PBT	1	Black Color
NO.	Description	Material	Q'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD.

PART NAME : DIN JACK PART NUMBER:SCN771S4NS0B001G

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

DATE	DWN	CHKD	APVD	MANAGER
07.18.2014	謝齊輝	<i>[Signature]</i>	<i>[Signature]</i>	宋廷芬
VERSION:4.0				SCALE: /

旭全
精確工業(深圳)有限公司
2014-07-18
圖面發行

文信
中心發行
2014-07-13
[Signature]

RoHS
Compliant

SPECIFICATIONS:
 Current Rating : Max 5.0A , 24V DC
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 24V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension