




AS625



AS625

AMB






产品性能

负载	电流/电压	A/VAC	10/300
介质耐压	线圈/触点间	V/S	4000
	触点间	V/S	2500
外连接导线		AWG/mm <sup>2</sup>	20-14/0.5-2.5
螺钉扭矩		Nm	0.8
外接线端子保护度			IP20


配接继电器及配件

插座型号	继电器型号	扳扣卡簧	模块	DIN 导轨
AS625	JQX-14FC/14FF 1Z	B-25C K-25C	AMB 系列	
	JQX-14FL 1Z 10A	B-20L K-20L		
	JQX-115F 1Z 10A	B-15F K-15F		

外形尺寸图, 接线图

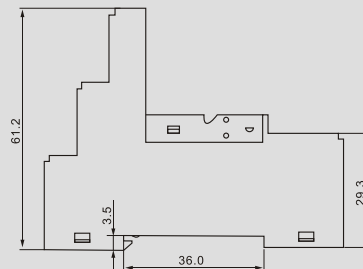


AS626



AS626

AMB



产品性能

负载	电流/电压	A/VAC	10/300
介质耐压	线圈/触点间	V/S	4000
	触点间	V/S	2500
外连接导线		AWG/mm <sup>2</sup>	20-14/0.5-2.5
螺钉扭矩		Nm	0.8
外接线端子保护度			IP20

配接继电器及配件

插座型号	继电器型号	扳扣卡簧	模块	DIN 导轨
AS626	JQX-14FC/14FF 2Z	B-25C K-25C	AMB 系列	
	JQX-14FL 2Z	B-20L K-20L		
	JQX-14FL 1Z 16A	B-20L K-20L		
	JQX-115F 2Z	B-15F K-15F		
	JQX-115F 1Z 16A	B-15F K-15F		

外形尺寸图, 接线图

