
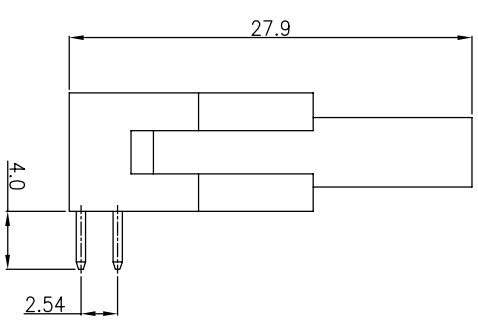
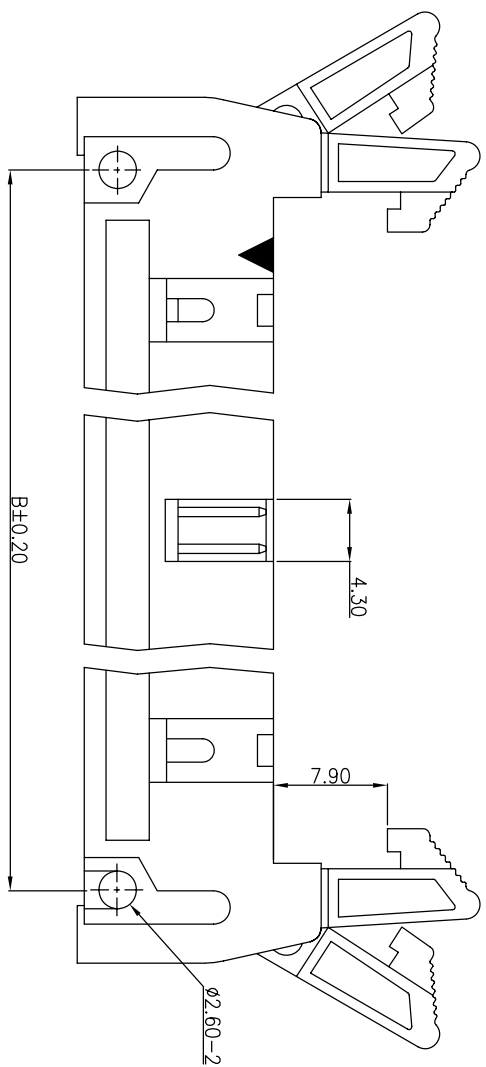
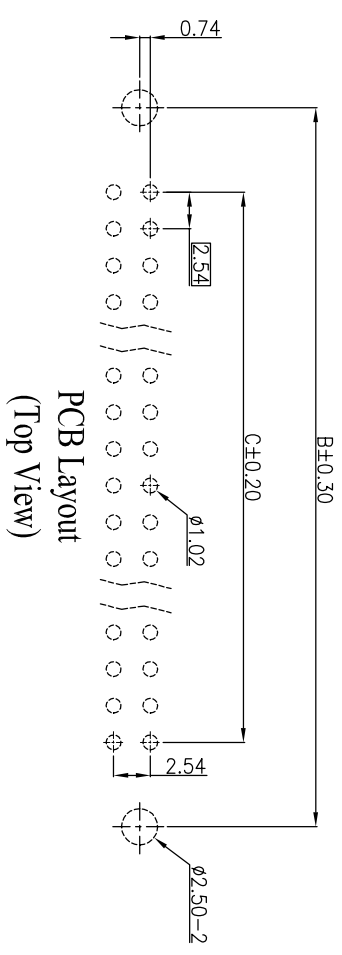


Rev.	Date	Description
A	2004/12/21	New Drawing
B	2005/04/14	Modify

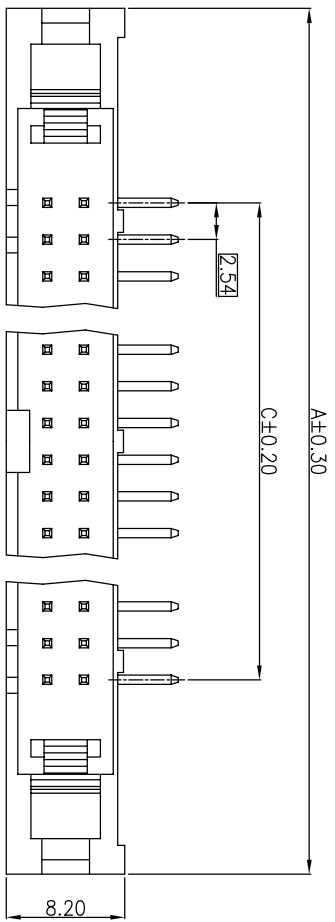

ROHS COMPLIANT

Order Information	Dimensions			
	Pos.	A	B	C
SCP10GR1-R	10	32.00	21.84	10.16
SCP14GR1-R	14	37.08	26.92	15.24
SCP16GR1-R	16	39.62	29.46	17.78
SCP20GR1-R	20	44.70	34.54	22.86
SCP24GR1-R	24	49.78	39.62	27.94
SCP26GR1-R	26	52.32	42.16	30.48
SCP30GR1-R	30	57.40	47.24	35.56
SCP34GR1-R	34	62.48	52.32	40.64
SCP40GR1-R	40	70.10	59.94	48.26
SCP50GR1-R	50	82.80	72.64	60.96

Material and Finish

- 1. Housing: Thermoplastic (UL94V-0), Black.
- 2. Terminal: Sq 0.64mm, Gold Plating

Electrical Characteristics

- 1. Current Rating: 3.0 Amp, Max.
- 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
- 3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

- 1. Operating Temperature: -55°C ~ +105°C

Reference	Part No.	Ordering Code	Notes
010	±0.30		
0100	±0.20		
01000	±0.10		

2.54mm Post Header Ejector Type
PCB Mount Right Angle With Latch



GTK UK LTD.