Professional CCTV System

Micro CCTV Camera

User Manual

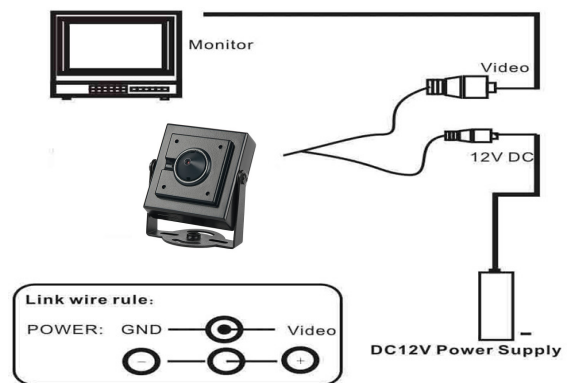**Please Read This User Guide Carefully Before Use.**

Warning

To prevent fire or electric shock hazarded, do not expose the unit to rain or mosiure. And only use the power supply specified for the unit.

This symbol alerts the user to presence of importance operating and maintenance issues according to the manual

Warning

Electronic shock dangerous,Don't open

CONNECTING CCTV SYSTEM

Monitor

Video

12V DC

DC12V Power Supply

Link wire rule:

POWER: GND — Video

Specification

Model	XY-AHD4007MM 2.0MP
System	PAL
Image Sensor	1/3" 1080P Progressive Scan CMOS sensor
Picture Elements	PAL:1920(H)*108(V)
Horizontal Recolution	2.0MP
Video OutPut	1.0Vp-p Composite Output (75Ω / BNC)
S/N Ratio	≥48dB
Min.Illumination	0LUX(IR ON)
Electronic Shutter	1/50(1/60)S～1/100,000S
White Balance	Auto
Gamma Ratio	＞0.45
Lens Mount	3.7mm Pinhole lens
Operating Temp.	_-10℃ ～ +50℃
Humidity	0 to 95%RH(non-condensing)
Power/Current	DC 12V
Sync System	2:1 Interlace internal Sync.
IR Project Distance	/
IR Status	/
Outdoor/Indoor	Indoor

Packing list

Name	Model	Number
Digital CCTV Camera	XY-AHD4007MM 2.0MP	1
User Manual	XY-AHD4007MM 2.0MP	1

Installation Notice

1.Do not attempt to open the cover

unless you are authorized to do so.

2.Handle with care.

3.Do not expose the camera to eroding Environment.

4.Pay attention to keep the surface of

the lens clean. The clearness of the

image can be damaged if the surface is scratched

5.Do not expose the camera to moisture

exceed 85% for a long time.

6.Please do not use strong corrosive

cleaner when clean the surface of the camera.

7.Avoid focusing on the sun or

highlight directly .Avoid working in

spotlight or highlight environment.

8.Set the power voltage according to the Manual.

9.Use the camera within the temperature between -10 ~+50.

Notes:

*Please note the camera's operating temperature and its using environment.Aviod using the camera at too high or too low temperatures.
*Never make the camera face the sun or bright object. otherwise will damge the CCD.
*Dont mount the camera near by the radiator or heater.