


High Voltage Analogue Insulation Testers



Technical Data

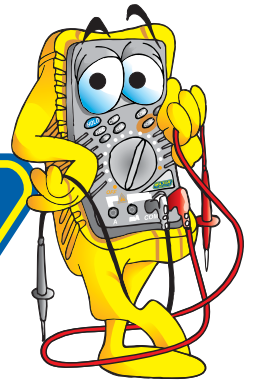

K3121



K3122



K3123

K3121 • K3122 • K3123

The K3121, K3122 and K3123 are High Voltage Insulation testers that are tough, rugged meters designed and manufactured to read accurate measurements in harsh environments. These models are gasket sealed to prevent ingress of liquids and dust and are supplied with a water resistant, heavy duty case. These Major Tech HV insulation testers are ideal for heavy duty maintenance and servicing of industrial installations, cables, transformers, generators and switchgear. They are supplied with appropriate leads for connecting to the earthed and conducting points of the circuit under test. The rated output voltage is maintained down to 0,1% of the tester's full scale resistance, permitting accurate measurements of even low insulation resistance.

Features Include:

- Measures DC Voltage in 2500V (**ONLY K3121**)
- Measures DC Voltage in 5000V (**ONLY K3122**)
- Measures DC Voltage in 5000V and 10000V (**ONLY K3123**)
- Large analogue display
- Colour scale with LED Indication
- Automatic discharge after test
- Low power consumption
- Battery test function
- Guard terminal supplied
- Supplied in a drip proof rubber sealed casing
- Lock down test button for continuous use

General Specifications

Operating Temperature and Humidity	: -10°C ~ +40°C at 85% max. relative humidity
Storage Temperature and Humidity	: -20°C ~ +60°C at 90% max. relative humidity
Insulation Resistance	: 1000MΩmax./1000V between electrical circuit and housing case
Withstand Voltage	: 5000V AC for one minute between electrical circuit and housing case
Dimensions	: 200 (L) X 140(W) X 80 (D) mm
Weight	: Approx. 1kg (including batteries and line probe)
Power Source	: 8pcs of 1.5V SUM-3 battery or equivalent
Accessories	: hard carrying case, batteries, test leads (earth and guard leads)



		Model 3121	Model 3122	Model 3123	
DC Test Voltage		2500V	5000V	5000V	10000V
Measuring Ranges		0 ~ 2000M Ω / 1000 ~ 100000M Ω (automatic change)	0 ~ 5000M Ω / 2000 ~ 200000M Ω (automatic change)	0 ~ 5G Ω / 2 ~ 200G Ω (automatic change)	0 ~ 10G Ω / 42 ~ 400G Ω (automatic change)
Accuracy	Insulation Resistance	\pm 5% of reading (100 ~ 50000M Ω) \pm 10% of reading or 0.5% of scale length (ranges other than listed above) at 23°C \pm 5°C \pm 10% of reading (100 ~ 50000M Ω) \pm 20% of reading or 1.0% of scale length (ranges other than listed above) at -10°C ~ +40°C	\pm 5% of reading (200 ~ 100000M Ω) \pm 10% of reading or 0.5% of scale length (ranges other than listed above) at 23°C \pm 5°C \pm 10% of reading (200 ~ 100000M Ω) \pm 20% of reading or 1.0% of scale length (ranges other than listed above) at -10°C ~ +40°C	\pm 5% of reading (0.2 ~ 100G Ω) \pm 10% of reading or 0.5% of scale length (ranges other than listed above) at 23°C \pm 5°C \pm 10% of reading (0.2 ~ 100G Ω) \pm 20% of reading or 1.0% of scale length (ranges other than listed above) at -10°C ~ +40°C	\pm 5% of reading (0.4 ~ 200G Ω) \pm 10% of reading or 0.5% of scale length (ranges other than listed above) at 23°C \pm 5°C \pm 10% of reading (0.4 ~ 200G Ω) \pm 20% of reading or 1.0% of scale length (ranges other than listed above) at -10°C ~ +40°C
	Output Voltage	2500V \pm 5% (100 ~ 50000M Ω)	5000V \pm 5% (200 ~ 100000M Ω)	5000V \pm 5% (0.2 ~ 100G Ω)	10000V \pm 5% (0.4 ~ 200G Ω)

Ordering Information

HEAD OFFICE

Cnr Rover and Jaguar Roads, Rustivia Ext 3, Elandsfontein
P.O. Box 888, Isando 1600, South Africa
Telephone: +27 11 822 1551
Sales Fax: +27 11 822 2806
Admin Fax: +27 11 822 1411
e-mail: sales@major-tech.com
National Tel: 08 61 MAJORT / 08 61 62 5678

BRANCHES - DURBAN

6A Pastel Park, Wareing Road, Pinetown
P.O. Box 15550, Ashwood 3605
Telephone: +27 31 701 5830
Sales Fax: +27 31 701 6986

BRANCHES - CAPE TOWN

109 Kyalami Drive, Killarney Gardens
P.O. Box 60122, Tabelview 7439
Telephone: +27 21 556 3091
Sales Fax: +27 21 556 3093

BRANCHES - PORT ELIZABETH

175 Kempston Road, Sidwell
P.O. Box 22499, Port Elizabeth 6000
Telephone: +27 41 453 3818
Sales Fax: +27 86 633 9809

