

公司 CANAL ELECTRONIC CO.,LTD.

ROCKER SWITCH MODEL MR5 SERIES

RATING: 3A 250VAC μ (cURus)





6A 125VAC μ (cURus)

3A 250V~ μ T100/55 (ENEC15/CQC)


DIELECTRIC VOLTAGE-WITHSTAND: 1,500VAC FOR 1 MINUTE

INSULATION RESISTANCE: DC 500V 100M Ω (MIN.)

CONTACT RESISTANCE: 20m Ω INITIAL (MAX.)

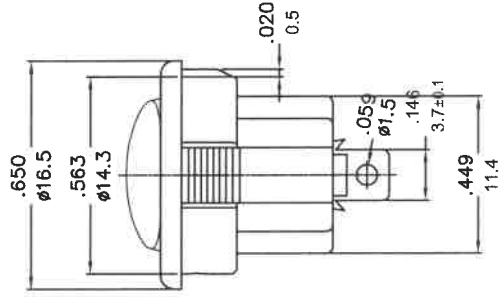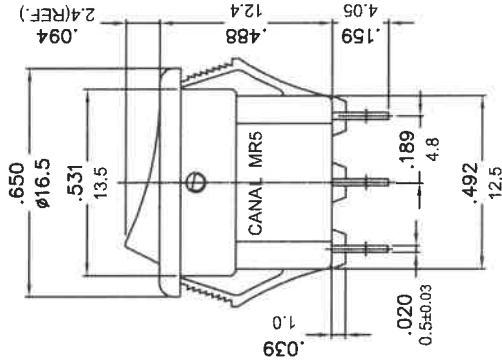

PANEL CUTOUT DIMENSION

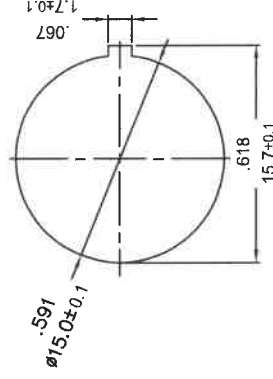

X=(1.0~2.0mm)

PANEL THICKNESS

MR5120-R5BB

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0.12/0.3$ (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES	ANGLE	SCALE	UNIT	PART NAME	MR5 SPEC DRAWING	DWG NO
2020.08.13	修改Rating数据	张斌	张斌	张斌	2/1	mm	MR5-121R5W-NBBA-0N2C		S8150C
2020.08.11	修改Rating数据	张斌	张斌	张斌	2020.07.22	mm	MR5-121R5W-NBBA-0N2C		S8150C
2020.07.22	首次出图	张斌	张斌	张斌	2020.07.22	mm	MR5-121R5W-NBBA-0N2C		S8150C