
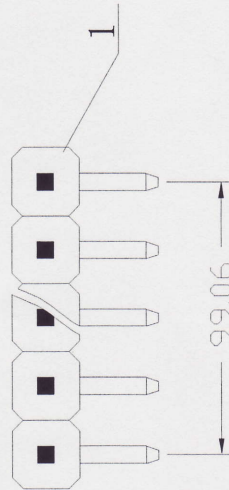
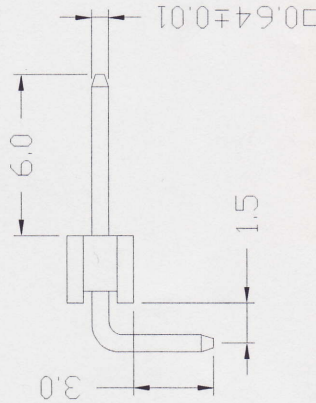


709401LP

序号/rev.No.	名称/Title	文件编号/File No.
1	塑料件	
2	端子	

Specifications:
 Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature:-55°C--+105°C
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

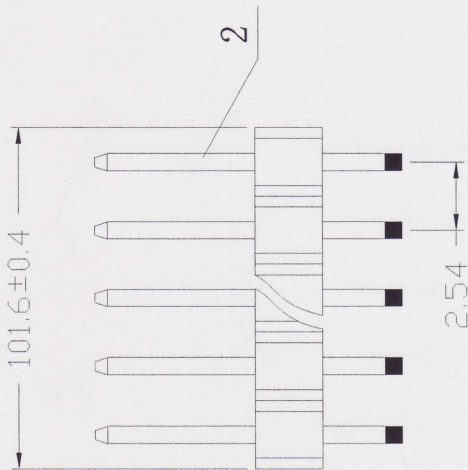

communicica (PTY) LTD
 A WORLD OF ELECTRONICS
 Reg. No. 1979/00377/07

■ HEAD OFFICE
 Tel (012) 657-3500
 Fax (012) 657-3550
 E-Mail: sales@communicica.co.za
 Web: www.communicica.co.za

■ PRETORIA
 Tel (012) 328-7008
 Fax (012) 328-7018

■ CAPE TOWN
 Tel (021) 447-0948
 Fax (021) 447-0959

平行。 112-SR40G (13,9MM)

审核/Checked by	批准/Approved by	公差/General Tolerance
图名/Title	文件编号/File No.	X. ±0.2 X. ±2 .X ±0.1 .X ±1 .XX ±0.05 .XX ±0.5 .XXX ±0.01
112-SR40G	页序/Sheet	单位/Units: mm
备注/Remark		

序号/rev.No. 更改记录/revision note 签名/signature 日期/date