


成型尺寸	公差
5mm 以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm 以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

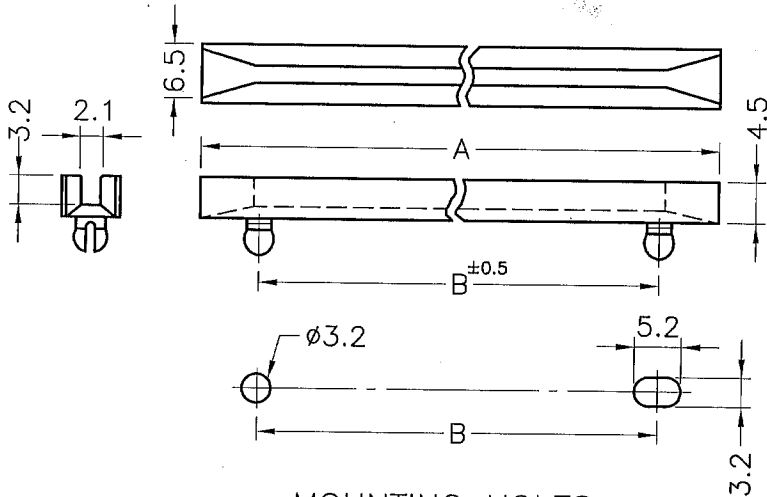

PART NO.	A	B	COLOR
CG-250	63.5	50.8	NATURAL
CG-300	76.2	63.5	NATURAL
CG-300(B)	76.2	63.5	BLACK
CG-350	88.9	76.2	NATURAL
CG-350(B)	88.9	76.2	BLACK
CG-400	101.6	88.9	NATURAL
CG-400(B)	101.6	88.9	BLACK
CG-450	114.3	101.6	NATURAL
CG-500	127.0	114.3	NATURAL
CG-500(B)	127.0	114.3	BLACK
CG-550	139.7	127.0	NATURAL
CG-550(B)	139.7	127.0	BLACK
CG-600	152.4	139.7	NATURAL
CG-600(B)	152.4	139.7	BLACK

MOUNTING HOLES
CHASSIS THICKNESS: 0.8~1.2

QMFZ2 Component - Plastics
E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS CHESTNUT RUN PLAZA PO BOX 80713 WILMINGTON DE 19880

Wednesday, September 15, 2004

B41938

Material Designation: 101(+)(f1), 101F(+)(f1), 101L(+)(f1), E101(+)(f1), E101L(f1), 132F(+)(f1), 135F(+)(f1)
Product Description: Polyamide 66 (PA66), designated "Zytel" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.71	V-2	4	0	130	75	85	725	960
	1.5	V-2	3	0	130	75	85	750	960
	3	V-2	2	0	130	75	85	800	960
	6	V-2	2	0	130	75	85	800	960

CTI: 0

HVTR: 0

D495: 6

Dielectric Strength (KV/mm): 13

Volume Resistivity (10¹²ohm-cm): 14

IEC Ball Pressure (Ck): -

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

Dimensional Stability(%): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Heat Deflection (Ck): -

(+) Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics.

ISO Charpy Impact (kJ/m²): -

(f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" or "MIN" or "ZEN" or "DEL" or "CRA" or "RYN".

Report Date: 7/29/1996

Underwriters Laboratories Inc®

UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN) CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE		PC板導槽		產品規格圖面	
MATERIAL		NYLON 66 UL94V-2		DATE	1998.04.17
FINISH				DRAWN	JASON
COLOR		SEE ABOVE		CHECK	
UNLESS OTHERWISE SPECIFIED TOLERANCE		SEE ABOVE		APPROVED	

PART NUMBER		DRAWING NUMBER			
SEE ABOVE		CG-H			
SIZE	SCALE	UNIT	REV		
A4	NONE	mm	B		