

Office Range

Features

- Slimline design
- Effective Filter system
- Integral circuit breaker
- Fault indication
- Thermal disconnect protection




The office range of filtered protected outlets provide surge and transient suppression for computer and office related equipment resulting from mains bourne noise and induced lightning. Available in different plug standards and variations in number of sockets, these units have an integral. EMI/RFI filter, heavy duty surge arrestor, thermal circuit breaker and fault indicator. Failsafe protection is provided by the inclusion of Clearline’s new “ thermo-trip ” technology.


Specifications	
Power Module	
Max. continuous voltage	250V 50Hz
Max. continuous current	16A
Earth leakage	<1.5mA
Max. current ismax (8/20)	8kA
Residual voltage at 5kA (8/20)	Approx. 900V
Response time	<25ns
Temperature range	-20°C to +70°C
Filtration dB/100kHz	45dB
Filtration dB/1MHz	40dB
Standards Compliance	ANSI C62.41 IEC 61643-1

	5 x 16A round pin SA	12-00608
	1 x 16A round pin SA	12-00696

Office- Filter characteristics

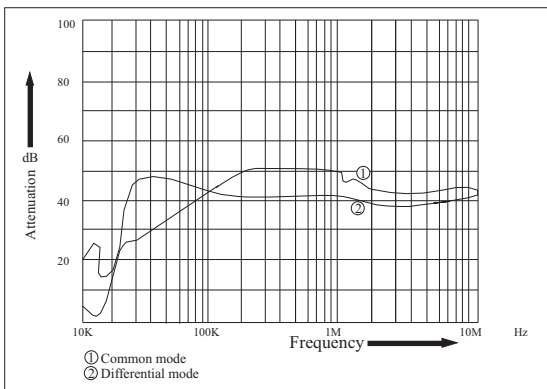

Dimensions

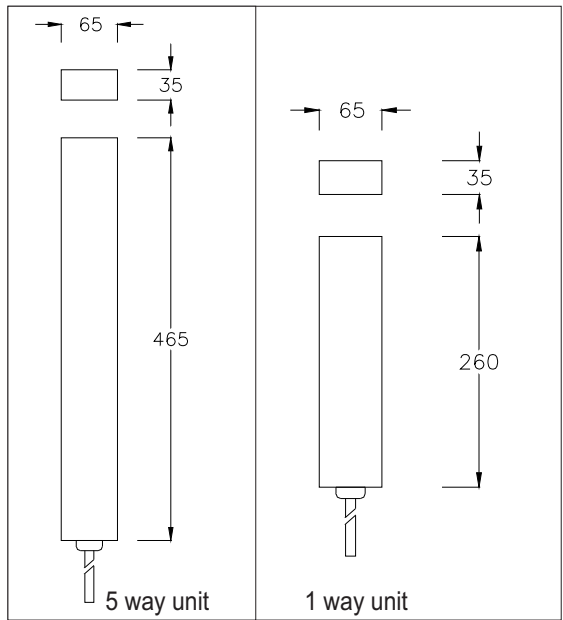

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd
 Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa
 P.O. Box 5985, Halfway House, 1685
 Tel: +27 (0) 11 848-1100
 Fax: +27 (0) 11 314-3880
 E-mail: info@clearline.co.za
 www.clearline.co.za

