

Rackpower 2000

Features


- Compact design
- Surge protection and filtration
- Failsafe protection




A power strip with surge protection for communication and modem racks. Utilizes a “2U” slot on a 483mm (19 inch) rack system and provides six socket outlets to power equipment. The Rackpower 2000 automatically disconnects the power to the equipment in case of damage to the protection element or power overload. An integral ON/OFF switch with circuit breaker and indicator has been provided. EMI/RFI filtration has also been provided. The Rackpower 2000 mounts horizontally in a 483mm (19inch) cabinet.

Specification	
Power	
Nom. continuous voltage	230VAC 50Hz
Max continuous current	16A
Earth leakage current	<1.5mA
Max discharge current Ismax (8/20)	8kA
Filtration dB/100kHz	50dB
Filtration dB/ 1MHz	60dB
Response time	<25ns
Temperature range	10°C to +70°C
Standards compliance	IEC61643-1, ANSI C62.41
Dimensions	490 x 60 x 65mm

Filter Response

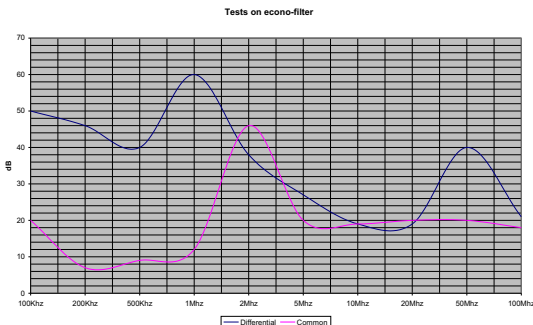

Dimensions

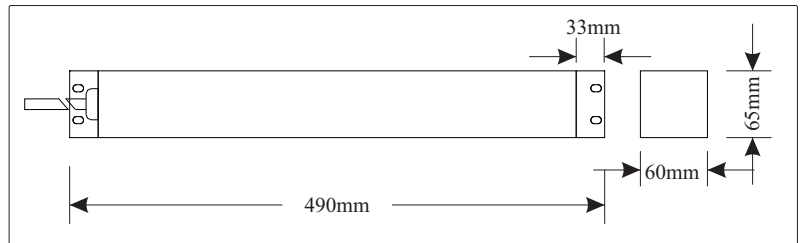

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1100

Fax: +27 (0) 11 314-3880

E-mail: info@clearline.co.za

www.clearline.co.za

