

THE DATALINE SERIES

HD Coaxial Network/CCTV Protection

Features


- Easy installation
- Low insertion loss
- Failsafe protection
- Compact design

Coaxial protection for High Definition data transmission lines. Suitable for HD CCTV applications. These devices exhibit negligible insertion loss and are fitted in line at the equipment connection.



Specifications	12-00961	12-00971
Order Code	12-00961	12-00971
Max operating voltage	1V p-p	1V p-p
Max operating current	0.3A	0.3A
Max discharge current (Differential mode)	2kA	2kA
Max discharge current (Common mode)	2kA	2kA
Residual voltage	< 2.5V	< 2.5V
Insertion loss at 10MHz	0.8dB	0.8dB
Connectors	BNC M-F	BNC F-F
Impedance	75ohm unbalanced	75ohm unbalanced
Range	Up to 100m	Up to 100m
Temperature range	- 10°C to 70°C	- 10°C to 70°C
Application	HD CCTV Composite	HD CCTV Composite

Dimensions

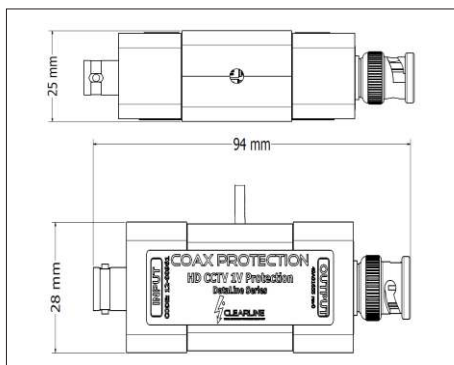

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1111

Fax: +27 (0) 11 314-3880

E-mail: info@clearline.co.za

www.clearline.co.za

