

RADIO TEST REPORT

For

Shenzhen Sonoff Technologies Co., Ltd.

Wi-Fi Smart Lamp Holder

Test Model: SlampherR2

Additional Model No.: /

Prepared for : Shenzhen Sonoff Technologies Co., Ltd.
Address : Building 8, Room 1001, Lianhua industrial park, Longyuan Road,
Hualian community, Longhua St, Longhua dist, Shenzhen,
Guangdong, China.

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 601, Xingyuan Industrial Park, Gushu Community, Xixiang
Street, Bao' an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 28, 2019
Number of tested samples : 1
Serial number : Prototype
Date of Test : March 28, 2019~ April 08, 2019
Date of Report : April 12, 2019



RADIO TEST REPORT **ETSI EN 300 220-2 V3.1.1 (2017-02)**

Short Range Devices (SRD) operating in the frequency range 25 MHz to 1 000 MHz; Part 2:
Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU for
non-specific radio equipment.

Report Reference No. : **LCS190326086AEC**

Date of Issue : April 12, 2019

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 101, 601, Xingyuan Industrial Park, Gushu Community, Xixiang Street, Bao' an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐

Applicant's Name..... : **Shenzhen Sonoff Technologies Co., Ltd.**

Address : Building 8, Room 1001, Lianhua industrial park, Longyuan Road, Hualian community, Longhua St, Longhua dist, Shenzhen, Guangdong, China.

Test Specification

Standard : ETSI EN 300 220-1 V3.1.1(2017-02)
ETSI EN 300 220-2 V3.1.1(2017-02)

Test Report Form No. : LCSEMC-1.0


TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2017-06

Shenzhen LCS Compliance Testing Laboratory Ltd. all rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : **Wi-Fi Smart Lamp Holder**


Trade Mark : 

Test Model : SlampherR2

Ratings : Input: AC 100V-240V 50/60Hz;
Output: AC 100V-240V 50/60Hz


Result : **Positive**

Compiled by:



Ryan Hu/ Administrators

Supervised by:



Calvin Weng/ Technique principal

Approved by:




Gavin Liang/ Manager

RADIO -- TEST REPORT**Test Report No. : LCS190326086AEC**April 12, 2019
Date of issue

Test Model..... : Wi-Fi Smart Lamp Holder

EUT..... : SlampherR2

Applicant..... : Shenzhen Sonoff Technologies Co., Ltd.Building 8, Room 1001, Lianhua industrial park, Longyuan
Address..... : Road, Hualian community, Longhua St, Longhua dist, Shenzhen,
Guangdong, China.

Telephone..... : /

Fax..... : /

Manufacturer..... : Shenzhen Sonoff Technologies Co., Ltd.Building 8, Room 1001, Lianhua industrial park, Longyuan
Address..... : Road, Hualian community, Longhua St, Longhua dist, Shenzhen,
Guangdong, China.

Telephone..... : /

Fax..... : /

Factory..... : /

Address..... : /

Telephone..... : /

Fax..... : /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	April 12, 2019	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	7
1.1. Product Description for Equipment Under Test (EUT).....	7
1.2. Objective	7
1.3. Test Methodology.....	7
1.4. Description of Test Facility	7
1.5. Equipment	8
1.6. Host System Configuration List and Details	8
1.7. External I/O	8
1.8. Measurement Uncertainty (95% confidence levels, k=2)	8
2. SYSTEM TEST CONFIGURATION.....	9
2.1. EUT Exercise Software	9
2.2. Special Accessories	9
2.3. Equipment Modifications	9
2.4. External I/O Cable.....	9
2.5. Configuration of Test Setup.....	9
3. SUMMARY OF TEST RESULTS	10
4. EFFECTIVE RADIATED POWER.....	11
4.1. Standard Applicable	11
4.2. Test Procedure	11
4.3. Test Data.....	12
5. MAXIMUM EFFECTIVE RADIATED POWER SPECTRAL DENSITY.....	13
6. DUTY CYCLE	14
6.1. Standard Applicable	14
6.2. Test Procedure	14
6.3. Test Data.....	14
7. OCCUPIED BANDWIDTH.....	15
7.1. Standard Applicable	15
7.2. Test Procedure	15
7.3. Test Data.....	16
8. TX OUT OF BAND EMISSIONS.....	17
8.1. Standard Applicable	17
8.2. Test Procedure	18
8.3. Test Data.....	18
9. TRANSIENT POWER	19
9.1. Standard Applicable	19
9.2. Test Procedure	19
9.3. Test Data.....	19
10. ADJACENT CHANNEL POWER	20
10.1. Standard Applicable	20
10.2. Test Procedure	20
10.3. Test Data.....	20
11. TX BEHAVIOUR UNDER LOW VOLTAGE CONDITIONS.....	21
11.1. Standard Applicable.....	21
11.2. Test Procedure	21
11.3. Test Data.....	21
12. ADAPTIVE POWER CONTROL.....	22
12.1. Standard Applicable	22
12.2. Test Procedure	22
12.3. Test Data.....	22
13. FHSS EQUIPMENT.....	22
13.1. Standard Applicable	22
13.2. Test Procedure	22

13.3. Test Data.....	22
14. SHORT TERM BEHAVIOUR.....	22
14.1. Standard Applicable	22
14.2. Test Procedure	22
14.3. Test Data.....	22
15. UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	23
15.1. Standard Applicable	23
15.2. Test Procedure	23
15.3. Test Data.....	23
16. BLOCKING (RECEIVER REQUIREMENTS)	24
16.1. Standard Applicable	24
16.2. Test Procedure	24
16.3. Test Data.....	25
17. RECEIVER SPURIOUS RADIATION	26
17.1. Standard Applicable	26
17.2. Test Procedure	26
17.3. Test Data.....	26
18. LIST MEASURING EQUIPMENT	27
19. TEST SETUP PHOTOGRAPHS	28

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT : Wi-Fi Smart Lamp Holder
Model No. : SlampherR2
Model Declaration : /
Test Model : SlampherR2
Power Supply : Input: AC 100V-240V 50/60Hz;
Output: AC 100V-240V 50/60Hz
Hardware Version : Slampher V2.4
Software Version : FWSW-0185-SWITCH-8285-DOUT-v2.6.1-20181212.104940.63
7-FACTORY

WIFI(2.4G Band)

Frequency Range : 2412-2472MHz
Channel Spacing : 5MHz
Channel Number : 13 channels for 20MHz bandwidth(2412~2472MHz)
Modulation Type : 802.11b: DSSS; 802.11g/n: OFDM
Antenna Description : Internal antenna, 1dBi (Max.)

433 Receiver

Frequency Range : 433.92MHz
Channel Number : 1
Modulation Type : CCK
Receiver Category : Category 2
Antenna Description : Internal Antenna

1.2. Objective

The following report of is prepared on behalf of the **Shenzhen Sonoff Technologies Co., Ltd.** in accordance with ETSI EN 300 220-2 V3.1.1 (2017-02), Short Range Devices (SRD) operating in the frequency range 25 MHz to 1 000 MHz; Part 2: Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU for non-specific radio equipment.

The objective is to determine compliance with ETSI EN 300 220-2 V3.1.1 (2017-02).

1.3. Test Methodology

All measurements contained in this report were conducted with ETSI EN 300 220-1 V3.1.1 (2017-02).

1.4. Description of Test Facility

FCC Registration Number is 254912.
Industry Canada Registration Number is 9642A-1.
EMSD Registration Number is ARCB0108.
UL Registration Number is 100571-492.
TUV SUD Registration Number is SCN1081.
TUV RH Registration Number is UA 50296516-001.
NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.

1.5. Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

1.6. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
FSL	tungsten lamp	E27	--	CE

1.7. External I/O

I/O Port Description	Quantity	Cable
--	--	--

1.8. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.10dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V

2. SYSTEM TEST CONFIGURATION

2.1. EUT Exercise Software

N/A.

2.2. Special Accessories

N/A.

2.3. Equipment Modifications

No modifications were made to the unit tested.

2.4. External I/O Cable

N/A.

2.5. Configuration of Test Setup

Please refer to the test setup photo.

3. SUMMARY OF TEST RESULTS

ETSI EN 300220-2 V3.1.1 (2017-02)		
RULE	DESCRIPTION OF TEST	RESULT
§4.3.1	EFFECTIVE RADIATED POWER	N/A
§4.3.2	MAXIMUM EFFECTIVE RADIATED POWER SPECTRAL DENSITY	N/A
§4.3.3	DUTY CYCLE	N/A
§4.3.4	OCCUPIED BANDWIDTH	N/A
§4.3.5	TX OUT OF BAND EMISSIONS	N/A
§4.3.6	TRANSIENT POWER	N/A
§4.3.7	ADJACENT CHANNEL POWER	N/A
§4.3.8	TX BEHAVIOUR UNDER LOW VOLTAGE CONDITIONS	N/A
§4.3.9	ADAPTIVE POWER CONTROL	N/A
§4.3.10	FHSS EQUIPMENT	N/A
§4.3.11	SHORT TERM BEHAVIOUR	N/A
§4.2.2	UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	N/A
§4.4.2	BLOCKING (REVEIVER REQUIREMENTS)	COMPLIANT
§4.2.2	RECEIVER SPURIOUS RADIATION	COMPLIANT

4. EFFECTIVE RADIATED POWER

4.1. Standard Applicable

According to ETSI EN 300 220-2 V3.1.1 (2017-02) section 4.3.1, the effective radiated power shall not exceed the power class value given in table 5:

Table 5: Maximum radiated power limit, e.r.p., channel spacing, spectrum access and mitigation requirements

Operational Frequency Band		Maximum effective radiated power, e.r.p.	Maximum occupied bandwidth	Channel access and occupation rules (e.g. Duty cycle or LBT + AFA)
H	433,050 MHz to 434,790 MHz	10 mW	The whole band	10%

NOTE 1: When either a duty cycle, Listen Before Talk (LBT) or equivalent technique applies then it shall not be user dependent/adjustable and shall be guaranteed by appropriate technical means. For LBT devices without Adaptive Frequency Agility (AFA) or equivalent techniques, the duty cycle limit applies.

NOTE 2: Devices supporting audio and video applications shall use a digital modulation method with a maximum bandwidth of 300 kHz. Devices supporting analogue and/or digital voice shall have a maximum bandwidth not exceeding 25 kHz.

4.2. Test Procedure

According to ETSI EN 300 220-1 V3.1.1 (2017-02) section 5.2.2

Effective Radiated Power (conducted measurement):

This method applies only to EUT with a permanent external antenna connector.

Test conditions:

- 1) The measurement shall be performed on the lowest and the highest Operating Frequencies declared by the manufacturer. Additional frequencies may be tested.
- 2) The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. D-M1 test signal (unmodulated carrier) shall not be used for equipment with non-constant envelope modulation.
- 3) The RBW of the spectrum analyser shall be wide enough to cover the complete power envelope (\geq OCW) of the signal of the EUT.

Measurement procedure:

The transmitter shall be connected to a dummy load as described in clause 4.3.7 and the conducted power delivered shall be measured with a measurement receiver according to clause 4.3.10.

In the case of non-constant envelope modulation, a peak detector shall be used. The maximum gain of the antenna to be used together with the equipment shall be declared by the manufacturer and this shall be recorded in the test report.

Perp, the radiated power (e.r.p.) limit applies to the maximum measured conducted power ($P_{\text{conducted}}$) value adjusted by the antenna gain (relative to a dipole) ($P_{\text{erp}} = P_{\text{conducted}} + \text{antenna gain}$).

Effective radiated power (radiated measurement):

This measurement method applies to EUT other than those measured using clause 5.2.2.1 in ETSI EN 300 220-1 V3.1.1 (2017-02).

Test conditions:

- 1) The measurement shall be performed on the lowest and the highest Operating Frequencies declared by the manufacturer. Additional frequencies may be tested.
- 2) These measurements shall be performed at the highest power level at which the transmitter is intended to operate.
- 3) The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. D-M1 test signal (unmodulated carrier) shall not be used for equipment with non-constant envelope modulation.
- 4) The RBW of the spectrum analyser shall be wide enough to cover the complete power envelope (\geq

OCW) of the signal of the EUT.

- 5) In the case of a removable antenna, the antenna shall be fitted in a manner representative of normal use.
- 6) For measurement in extreme temperature conditions, it is preferable to use an internal or a temporary connector rather than a test fixture.

Measurement procedure:

A suitable test site shall be selected from those described in clause C.1 and the radiated power established using the procedures described in clause C.5.1 (or clause C.5.2) depending on the test site, followed by clause C.5.3.

In the case of non-constant envelope modulation, a peak detector shall be used.

4.3. Test Data

Not applicable to this device.

5. MAXIMUM EFFECTIVE RADIATED POWER SPECTRAL DENSITY

Not applicable: This device is neither applies to transmitters using annex B bands I, L nor using DSSS or wideband techniques other than FHSS modulation, in annex C band X.

Annex B and C are in ETSI EN 300 220-2 V3.1.1 (2017-02).

6. DUTY CYCLE

6.1. Standard Applicable

In a period of 1 hour the duty cycle shall not exceed the following values given in table below.

Operational Frequency Band		Maximum effective radiated power, e.r.p.	Maximum occupied bandwidth	Channel access and occupation rules (e.g. Duty cycle or LBT + AFA)
H	433,050 MHz to 434,790 MHz	10 mW	The whole band	10%

6.2. Test Procedure

- (1) Put the EUT on the support in its standard position and switched on.
- (2) Find the transmit signal and marker to the center frequency.
- (3) Use the zero span of spectrum analyzer to read out the “message” on and off time in any one period.

6.3. Test Data

Not applicable to this device.

7. OCCUPIED BANDWIDTH

7.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.6.

The occupied bandwidth (OBW) is the Frequency Range in which 99 % of the total mean power of a given emission falls. The residual part of the total power being denoted as β , which, in cases of symmetrical spectra, splits up into $\beta/2$ on each side of the spectrum. Unless otherwise specified, $\beta/2$ is taken as 0.5 % as described in Figure 1.

The maximum occupied bandwidth includes all associated side bands above the appropriate emissions level and the frequency error or drift under extreme test conditions.

The Operating Channel shall be declared and shall reside entirely within the Operational Frequency Band.

The Maximum Occupied Bandwidth at 99 % shall reside entirely within the Operating Channel defined by F_{low} and F_{high} .

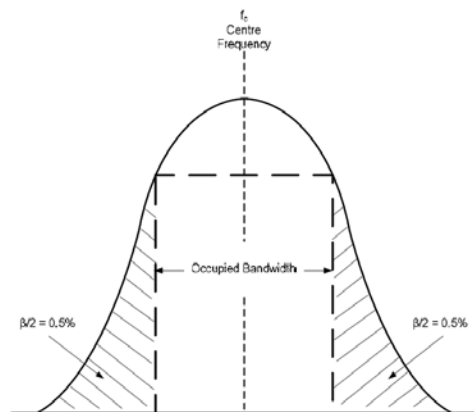


Figure 1: Signal occupied bandwidth

7.2. Test Procedure

- 1) The measurement shall be performed on the lowest and the highest Operating Frequencies declared by the manufacturer. Additional frequencies may be tested.
- 2) The measurement shall be performed with a spectrum analyser.
- 3) For devices with e.r.p. ≤ -30 dBm, OBW may be either measured or taken as equal to the OCW within the operational frequency band.

Radiated measurement:

A suitable test site shall be selected from those described in clause C.1 and the measurements in clause 5.6.3.4 shall be performed using corresponding radiated measurement methods described in clause C.5.

Conducted measurement:

The EUT shall be connected to an artificial antenna which shall be connect to the test equipment via an appropriate attenuator.

The spectrum analyser shall be configured as appropriate for the parameters shown in the following Table.

Setting	Value	Notes
Centre frequency	The nominal Operating Frequency	The highest or lowest Operating Frequency as declared by the manufacturer
RBW	1 % to 3 % of OCW without being below 100 Hz	/
VBW	3*RBW	Nearest available analyser setting to 3 x RBW
Span	At least 2 x Operating Channel width	Span should be large enough to include all major components of the signal and its side bands
Detector Mode	RMS	
Trace	Max hold	

If the equipment is capable of producing an unmodulated carrier and the test in ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.7 is performed, then the OBW measurements need only be performed under normal test conditions. Any required results for Maximum OBW under extreme conditions are obtained by addition and subtraction of the upper and lower frequency error results to each bandwidth measurement obtained in this test.

Step 1:

Operation of the EUT shall be started, on the highest operating frequency as declared by the manufacturer, with the appropriate test signal.

The signal attenuation shall be adjusted to ensure that the signal power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals on either side of the power envelope being included in the measurement.

Step 2:

When the trace is completed the peak value of the trace shall be located and the analyser marker placed on this peak.

Step 3:

The 99 % occupied bandwidth function of the spectrum analyser shall be used to measure the occupied bandwidth of the signal.

7.3. Test Data

Not applicable to this device.

8. TX OUT OF BAND EMISSIONS

8.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.8.

Two OOB domains are defined, one for OC (see Figure 2) and one for Operational Frequency band (see Figure 3).

The spectrum masks for these two OOB domains may overlap.

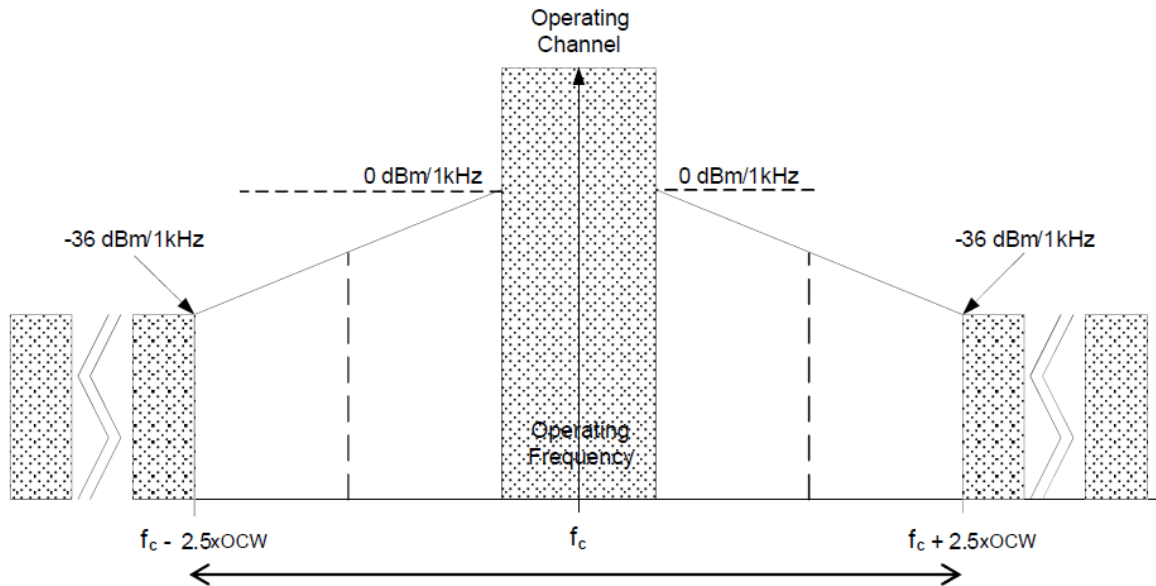


Figure 2: Out Of Band Domain for Operating Channel with reference BW

Unwanted emissions in the Out Of Band domain are those falling in the frequency range immediately below the lower, and above the upper, frequency of the Operating Channel. The OOB domain includes both frequencies outside the Operating Channel within the Operational Frequency Band and frequencies outside the Operational Frequency Band.

The relevant Out Of Band domain is shown in Figure 2 and applies within the Operational Frequency Band.

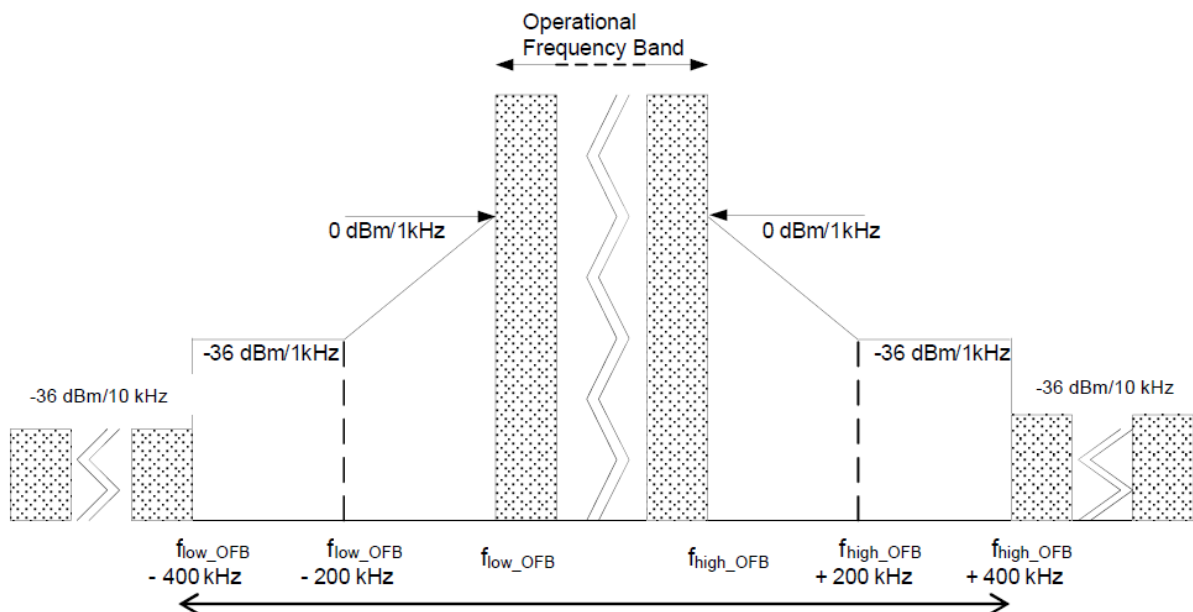


Figure 3: Out Of Band Domain for Operational Frequency Band with reference BW

Specific limits apply at frequencies immediately above and below the Operational Frequency Band as shown in Figure 3.

NOTE: f_{low_OFB} is the lower edge of the Operational Frequency Band.

f_{high_OFB} is the upper edge of the Operational Frequency Band.

The EUT emissions level in OOB domains for the Operating Channel and the Operational Frequency Band shall be less or equal to Table 1 spectrum mask.

Table 1: Emission limits in the Out Of Band domains

Domain	Frequency Range	RBW _{REF}	Max power limit
OOB limits applicable to Operational Frequency Band (See Figure 3)	$f \leq f_{\text{low_OFB}} - 400 \text{ kHz}$	10KHz	-36dBm
	$f_{\text{low_OFB}} - 400 \text{ kHz} \leq f \leq f_{\text{low_OFB}} - 200 \text{ kHz}$	1KHz	-36 dBm
	$f_{\text{low}} - 200 \text{ kHz} \leq f < f_{\text{low_OFB}}$	1KHz	See Figure 3
	$f = f_{\text{low_OFB}}$	1KHz	0 dBm
	$f = f_{\text{high_OFB}}$	1KHz	0 dBm
	$f_{\text{high_OFB}} < f \leq f_{\text{high_OFB}} + 200 \text{ kHz}$	1KHz	See Figure 3
	$f_{\text{high_OFB}} + 200 \text{ kHz} \leq f \leq f_{\text{high_OFB}} + 400 \text{ kHz}$	1KHz	-36 dBm
	$f_{\text{high_OFB}} + 400 \text{ kHz} \leq f$	10KHz	-36 dBm
OOB limits applicable to Operating Channel (See Figure 2)	$f = f_c - 2.5 \times \text{OCW}$	1KHz	-36 dBm
	$f_c - 2.5 \times \text{OCW} \leq f \leq f_c - 0.5 \times \text{OCW}$	1KHz	See Figure 2
	$f = f_c - 0.5 \times \text{OCW}$	1KHz	0 dBm
	$f = f_c + 0.5 \times \text{OCW}$	1KHz	0 dBm
	$f_c + 0.5 \times \text{OCW} \leq f \leq f_c + 2.5 \times \text{OCW}$	1KHz	See Figure 2
	$f = f_c + 2.5 \times \text{OCW}$	1KHz	-36 dBm

NOTE: f is the measurement frequency.
 f_c is the Operating Frequency.
 $f_{\text{low_OFB}}$ is the lower edge of the Operational Frequency Band.
 $f_{\text{high_OFB}}$ is the upper edge of the Operational Frequency Band.
OCW is the operating channel bandwidth.

8.2. Test Procedure

Please refer to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.8.3 for the measurement method.

8.3. Test Data

Not applicable to this device.

9. TRANSIENT POWER

9.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.10.

Transmitter transient power is power falling into frequencies other than the operating channel as a result of the transmitter being switched on and off.

The transient power shall not exceed the values given in Table 4.

Table 4: Transmitter Transient Power limits

Absolute offset from centre frequency	RBW _{REF}	Peak power limit applicable at measurement points
≤ 400 kHz	1KHz	0dBm
> 400 kHz	1KHz	-27dBm

9.2. Test Procedure

Please refer to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.10.3 for the measurement method.

9.3. Test Data

Not applicable to this device.

10. ADJACENT CHANNEL POWER

10.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.11.

Adjacent channel power is power incidental to proper operation of a transmitter falling into the neighbouring channels.

Where the operating channel width is less than or equal to 25 kHz, the power in the adjacent channels shall not exceed the values given in Table 5.

Table 5: Adjacent channel power limits for transmitters with $OCW \leq 25$ kHz

		Adjacent Channel power integrated over $0,7 \times OCW$	Alternate Adjacent Channel power integrated over $0,7 \times$ OCW
OCW < 20 kHz	Normal test conditions	-20 dBm	-20 dBm
	Extreme test conditions	-15 dBm	-20 dBm
OCW \geq 20 kHz	Normal test conditions	-37 dBm	-40 dBm
	Extreme test conditions	-32 dBm	-37 dBm

10.2. Test Procedure

Please refer to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.11.3 for the measurement method.

10.3. Test Data

Not applicable to this device.

11. TX BEHAVIOUR UNDER LOW VOLTAGE CONDITIONS

11.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.12.

The TX behaviour under low voltage condition is the ability of the equipment to maintain its operating frequency and not produce emissions which exceed any relevant limit when the batteries voltage falls below the lower extreme voltage level.

The equipment shall either:

- a) remain in the Operating Channel OC without exceeding any applicable limits (e.g. Duty Cycle); or
- b) reduce its effective radiated power below the Spurious Emission limits without exceeding any applicable limits(e.g. Duty Cycle); or
- c) shut down, (ceasing function); as the voltage falls below the manufacturers declared operating voltage. as the voltage falls below the manufacturers declared operating voltage.

11.2. Test Procedure

Step 1:

Operation of the EUT shall be started, on Operating Frequency as declared by the manufacturer, with the appropriate test signal and with the EUT operating at nominal operating voltage.

The centre frequency of the transmitted signal shall be measured and noted.

Step 2:

The operating voltage shall be reduced by appropriate steps until the voltage reaches zero.

The centre frequency of the transmitted signal shall be measured and noted.

Any abnormal behaviour shall be noted.

11.3. Test Data

Not applicable to this device.

12. ADAPTIVE POWER CONTROL

12.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.13.

The peak power measured when active APC function at its minimum setting shall not exceed the value shown in Table 6.

Table 6: APC power limit

Parameter	Limit
Transmitted e.r.p.	+7 dBm

12.2. Test Procedure

Please refer to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.13.3 for the measurement method.

12.3. Test Data

Not applicable: EUT No requirement.

13. FHSS EQUIPMENT

13.1. Standard Applicable

According to ETSI EN 300 220-2 V3.1.1 (2017-02) clause 4.3.10.

13.2. Test Procedure

Please refer to ETSI EN 300 220-2 V3.1.1 (2017-02) clause 4.3.10 for the measurement method.

13.3. Test Data

Not applicable: EUT No requirement.

14. SHORT TERM BEHAVIOUR

14.1. Standard Applicable

According to ETSI EN 300 220-2 V3.1.1 (2017-02) clause 4.3.11.

14.2. Test Procedure

Please refer to ETSI EN 300 220-2 V3.1.1 (2017-02) clause 4.3.11 for the measurement method.

14.3. Test Data

Not applicable: EUT No requirement.

15. UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

15.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.9.2.

The power of any unwanted emission in the spurious domain shall not exceed the values given in Table 7.

Table 19: Spurious domain emission limits

Frequency State	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies below 1000 MHz	above 1000 MHz
TX mode	-54 dBm	-36 dBm	-30 dBm
RX and all other modes	-57 dBm	-57 dBm	-47 dBm

15.2. Test Procedure

Please refer to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.9.3 for the measurement method.

15.3. Test Data

Not applicable to this device.

16. BLOCKING (RECEIVER REQUIREMENTS)

16.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.9.2.

The blocking levels at the specified frequency offsets shall be equal to or greater than the limits in the following Table, except at frequencies where spurious responses are found.

Blocking level parameters for RX category 1

Requirement	Limits
	Receiver category 1
Blocking at ± 2 MHz from Centre Frequency	≥ -20 dBm
Blocking at ± 10 MHz from Centre Frequency	≥ -20 dBm
Blocking at ± 5 % of Centre Frequency or 15 MHz, whichever is the greater	≥ -20 dBm

Blocking level parameters for RX category 1.5

Requirement	Limits
	Receiver category 1.5
Blocking at ± 2 MHz from Centre Frequency	≥ -43 dBm
Blocking at ± 10 MHz from Centre Frequency	≥ -33 dBm
Blocking at ± 5 % of Centre Frequency or 15 MHz, whichever is the greater	≥ -33 dBm

Blocking level parameters for RX category 2

Requirement	Limits
	Receiver category 2
Blocking at ± 2 MHz from Centre Frequency	≥ -69 dBm
Blocking at ± 10 MHz from Centre Frequency	≥ -44 dBm
Blocking at ± 5 % of Centre Frequency or 15 MHz, whichever is the greater	≥ -44 dBm

Blocking level parameters for RX category 3

Requirement	Limits
	Receiver category 3
Blocking at ± 2 MHz from Centre Frequency	≥ -80 dBm
Blocking at ± 10 MHz from Centre Frequency	≥ -60 dBm
Blocking at ± 5 % of Centre Frequency or 15 MHz, whichever is the greater	≥ -60 dBm

16.2. Test Procedure

Please refer to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.18.6 for the measurement method.

16.3. Test Data

Environmental Conditions

Temperature:	24.5°C
Relative Humidity:	53.8%
ATM Pressure:	100.0 kPa

Test Mode: Receiving (433.92MHz)

This receiver is belongs to RX category 2

Wanted Signal Channel (MHz)	Unwanted Signal Frequency (MHz)	Blocking level (dBm)	Limit (dBm)	Result
433.92MHz	433.92+2	-55	At least -69	Pass
433.92MHz	433.92+10	-37	At least -44	Pass
433.92MHz	433.92+15	-31	At least -44	Pass

Wanted Signal Channel (MHz)	Unwanted Signal Frequency (MHz)	Blocking level (dBm)	Limit (dBm)	Result
433.92MHz	433.92-2	-51	At least -69	Pass
433.92MHz	433.92-10	-34	At least -44	Pass
433.92MHz	433.92-15	-30	At least -44	Pass

17. RECEIVER SPURIOUS RADIATION

17.1. Standard Applicable

According to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.9.2.

The power of any spurious emission, radiated or conducted, shall not exceed the values given below. The limits are applicable to all receiver categories:

- -57dBm below 1 000 MHz;
- -47dBm above 1 000 MHz.

17.2. Test Procedure

Please refer to ETSI EN 300 220-1 V3.1.1 (2017-02) clause 5.18.6 for the measurement method.

17.3. Test Data

Environmental Conditions

Temperature:	24.5° C
Relative Humidity:	53.8%
ATM Pressure:	100.0 kPa

Test Result:

Test Mode: Receiving (433.92MHz)

Frequency (MHz)	Antenna Polarization	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
84.80	V	-94.62	1.40	21.10	-74.72	-57.00	-18.12
186.38	V	-94.62	2.79	24.40	-73.51	-57.00	-16.17
2536.37	V	-93.88	2.74	27.20	-69.40	-57.00	-12.38
3835.49	V	-85.84	2.86	28.70	-60.07	-57.00	-2.78
87.08	V	-93.43	2.84	33.30	-62.96	-57.00	-5.75
188.25	H	-87.70	1.40	21.10	-68.07	-57.00	-10.76
2533.64	H	-86.07	2.79	24.40	-64.44	-57.00	-7.29
3841.58	H	-93.58	2.74	27.20	-69.11	-57.00	-12.12
633.41	H	-93.87	2.86	28.70	-68.04	-57.00	-10.89
764.79	H	-96.69	2.84	33.30	-66.26	-57.00	-9.12

Remark:

- (1) Corrected Power (dBm) = SG O/P-Cable + Ant Gain
- (2) Measuring frequencies from 25 MHz to the 1GHz.
- (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

18. LIST MEASURING EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2018-11-15	2019-11-14
2	DC Power Supply	Agilent	E3642A	N/A	2018-11-15	2019-11-14
3	Temperature & Humidity Chamber	GUANGZHOU GOGN WEN	GDS-100	70932	2018-10-10	2019-10-09
4	EMI Test Software	AUDIX	E3	/	2018-06-16	2019-06-15
5	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2018-06-16	2019-06-15
6	Positioning Controller	MF	MF-7082	/	2018-06-16	2019-06-15
7	Active Loop Antenna	SCHWARZBEC K	FMZB 1519B	00005	2018-07-26	2019-07-25
8	By-log Antenna	SCHWARZBEC K	VULB9163	9163-470	2018-07-26	2019-07-25
9	Horn Antenna	SCHWARZBEC K	BBHA 9120D	9120D-1925	2018-07-02	2019-07-01
10	EMI Test Receiver	R&S	ESR 7	101181	2018-06-16	2019-06-15
11	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2018-11-15	2019-11-14
12	AMPLIFIER	QuieTek	QTK	CHM/0809065	2018-11-15	2019-11-14
13	RF Cable-R03m	Jye Bao	RG142	CB021	2018-06-16	2019-06-15
14	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2018-06-16	2019-06-15

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

19. TEST SETUP PHOTOGRAPHS



Fig.1



Fig.2

----- THE END OF REPORT -----