

# MP122CR

**Communica (PTY) LTD**

A WORLD OF ELECTRONICS Reg. No. 197900371701

**HEAD OFFICE**

Tel (012) 657-3500  
Fax (012) 657-3550




E-Mail: [sales@communica.co.za](mailto:sales@communica.co.za)  
Web: [www.communica.co.za](http://www.communica.co.za)

**CAPE TOWN**

Tel (021) 447-0948  
Fax (021) 447-0959

**PRETORIA**

Tel (012) 328-7008  
Fax (012) 328-7018

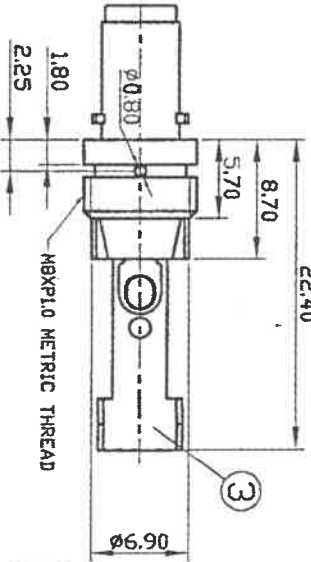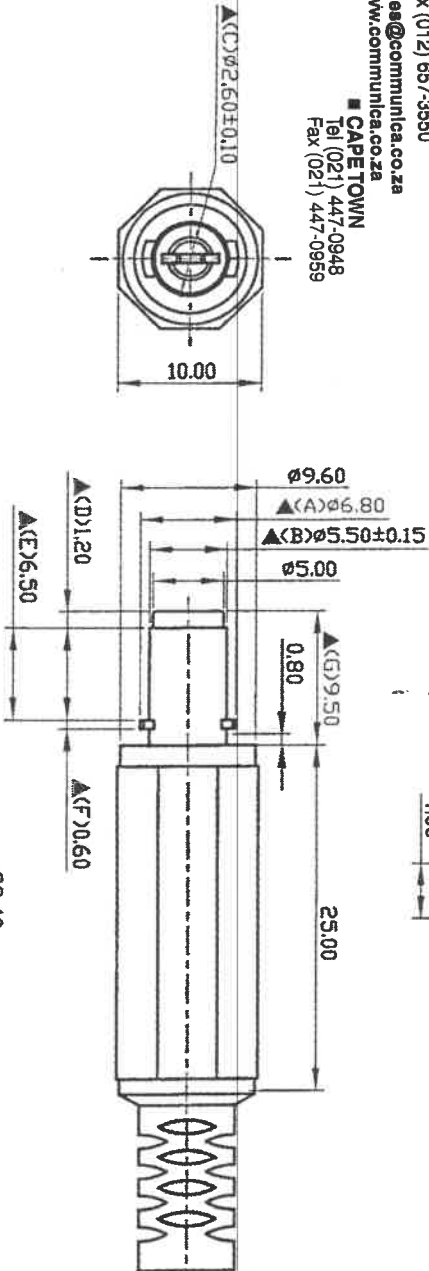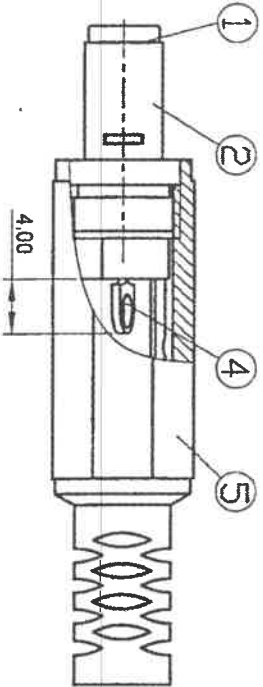

旭全  
精密工業(深圳)有限公司  
2021-09-22  
圖面發行

文符發行  
中心  
2021-09-22  
吳砂芬

NO.	Description	Material	Q'TY	Finish
5.	Housing	PE	1	Black Color
4.	Terminal	0.6T Brass	1	Nickel Plated
3.	Ground Terminal	0.4T Brass	1	Nickel Plated
2.	Outer Sleeve	Low Lead Brass Rod	1	Nickel Plated
1.	Insulator Ring	POM	1	Black Color

**S.C. PRECISION INDUSTRIAL CO., LTD.**

DATE	DWN	CHKD	APVD	MANAGER
09.18.2021	王平華	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>

PART NAME : DC PLUG PART NUMBER: SCDF443DBNNNBPTL

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm SCALE:1/1

ROHS&SVHC  
Compliant

SPECIFICATIONS:  
Contact Resistance : 30mΩ max.  
Insulation Resistance : 100MΩ min. at DC 24V 5A  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remarks ▲: The Most Important Dimension