

14FF- 1Z- A1-1/2

RELAY SOCKET



CHARACTERISTICS

Ambient temperature : -40 °C to 70°C
 Rated voltage: 250VAC
 Rated current : 10A (per pole)
 Dielectric strength min. : 5000VAC (between input & output)
 Steel retainer type : 14FF-H1 (for -1 type)
 14FF-H2 (for -2 type)


Applicable relay type:

- 1: suit for HF115F series (1 pole) (Relay height 15.7mm).
- 2: suit for HF14FF (Relay height 25.5mm).


DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm


Outline Dimensions

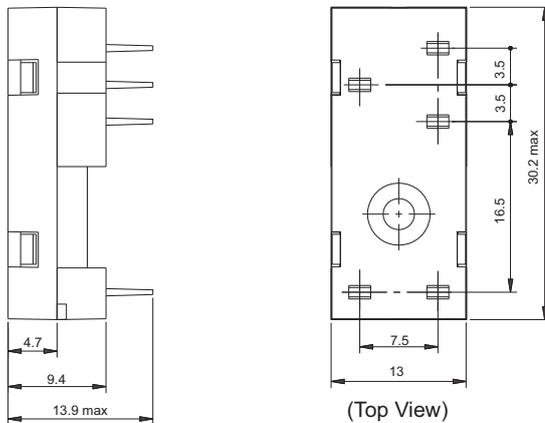

Wiring Diagram

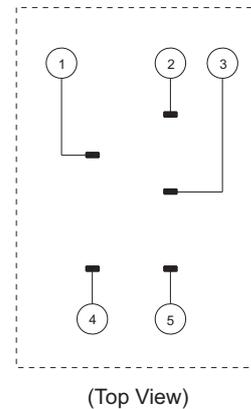

Retainer Dimensions



Two types of retainer height (h) :
 14FF-H1: h=17.2mm (for -1 type)
 14FF-H2: h=27.2mm (for -2 type)
 You can choose the type you need.



HONGFA RELAY
 ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2009 Rev. 1.10