


Product Area Male socket, front fastened, dip solder, M12 x 1, contact 10,5 mm
M12 connectors A-Coding serie 713/763

Pole 8
Article number 09 3481 550 08


illustration



scale drawing

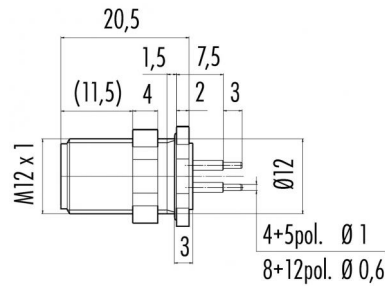

Contact Arrangement



	X	Y
1	2,69	0,57
2	0,57	2,69
3	-1,66	2,20
4	-2,75	0,19
5	-1,94	-1,94
6	0,19	-2,74
7	2,20	-1,65
8	0,00	0,00

You can find the assembly instruction on the next page.

Technical data

Common values

Connector Design	Male socket
Connector locking system	Screw-locking
Termination	dip solder
Upper temperature	+85 °C
Lower temperature	-40 °C

Material

Material of contact	CuZn (brass)
Contact plating	Au (gold)
Material of contact body	PA
Material of housing	CUZn (brass nickel plated)

Electrical values

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	2 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 68
Mechanical operation	>100 mating cycles

Cable data

Contacts 8: Male socket, front fastened, dip solder, M12 x 1, contact 10,5 mm



Product Male socket, front fastened, dip solder, M12 x 1, contact 10,5 mm
Area M12 connectors A-Coding serie 713/763

Pole 8
Article number 09 3481 550 08

Date: 2013-10-04 - Page 2 of 2

Installation instructions / Mounting cutout

Mit Durchgangsbohrung/*With bore hole*

