

Kingbright®

T-1 (3mm) CYLINDRICAL LED LAMPS

L-1334I HIGH EFFICIENCY RED L-1334N PURE ORANGE
 L-1334G GREEN L-1334PG PURE GREEN
 L-1334Y YELLOW
 L-1334SR SUPER BRIGHT RED
 L-1334SG SUPER BRIGHT GREEN

Features

- WIDE VIEWING ANGLE.
- LOW POWER CONSUMPTION.
- RELIABLE AND RUGGED.
- LONG LIFE-SOLID STATE RELIABILITY.

Description

The Green and Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The Pure Green source color devices are made with Gallium Phosphide Pure Green Light Emitting Diode.


The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Pure Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Pure Orange Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

Package Dimensions

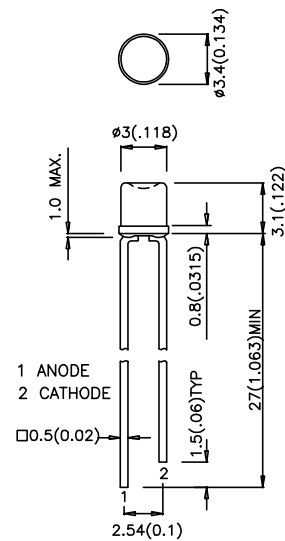

- Notes:
1. All dimensions are in millimeters (inches).
 2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
 3. Lead spacing is measured where the lead emerge package.
 4. Specifications are subjected to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 10 mA		Viewing Angle
			Min.	Max.	
L-1334IT	HIGH EFFICIENCY RED (GaAsP/GaP)	RED TRANS.	3.2	12.5	130°
L-1334EC	HIGH EFFICIENCY RED (GaAsP/GaP)	WATER CLEAR	3.2	12.5	130°
L-1334GT	GREEN (GaP)	GREEN TRANS.	3.2	12.5	130°
L-1334GC	GREEN (GaP)	WATER CLEAR	3.2	12.5	130°
L-1334YT	YELLOW (GaAsP/GaP)	YELLOW TRANS.	1.25	5	130°
L-1334YC	YELLOW (GaAsP/GaP)	WATER CLEAR	1.25	5	130°
L-1334SGT	SUPER BRIGHT GREEN (GaP)	GREEN TRANS.	*5	*20	130°
L-1334SGC	SUPER BRIGHT GREEN (GaP)	WATER CLEAR	*5	*20	130°
L-1334SRC	SUPER BRIGHT RED (GaAlAs)	WATER CLEAR	*20	*80	130°
L-1334SRT		RED TRANSPARENT	*20	*80	130°
L-1334SRW		WHITE DIFFUSED	*20	*70	130°
L-1334NT	PURE ORANGE (GaAsP/GaP)	ORANGE TRANS.	3.2	12.5	130°
L-1334NC	PURE ORANGE (GaAsP/GaP)	WATER CLEAR	3.2	12.5	130°
L-1334PGT	PURE GREEN (GaP)	GREEN TRANS.	1	4	130°
L-1334PGC	PURE GREEN (GaP)	WATER CLEAR	1	4	130°

- Notes:
1. $\theta 1/2$ is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
 2. * Luminous intensity with asterisk is measured is 20mA.

Electrical / Optical Characteristics at T_A=25°C


Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ_{peak}	Peak Wavelength	High Efficiency Red Green Yellow Pure Orange Pure Green Super Bright Red Super Bright Green	625 565 590 610 555 660 565		nm	IF=20mA
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	High Efficiency Red Green Yellow Pure Orange Pure Green Super Bright Red Super Bright Green	45 30 35 35 30 20 30		nm	IF=20mA
C	Capacitance	High Efficiency Red Green Yellow Pure Orange Pure Green Super Bright Red Super Bright Green	12 45 10 30 15 95 45		pF	VF=0V;f=1MHz
V _F	Forward Voltage	High Efficiency Red Green Yellow Pure Orange Pure Green Super Bright Red Super Bright Green	2.0 2.2 2.1 2.0 2.25 1.85 2.2	2.5 2.5 2.5 2.6 2.6 2.5 2.5	V	IF=20mA
I _R	Reverse Current	All	10		uA	VR = 5V

Absolute Maximum Ratings at T_A=25°C





Parameter	High Efficiency Red	Green	Yellow	Pure Orange	Pure Green	Super Bright Red	Super Bright Green	Units
Power dissipation	105	105	105	105	105	100	105	mW
DC Forward Current	30	25	30	30	25	30	25	mA
Peak Forward Current [1]	150	150	150	150	150	150	150	mA
Reverse Voltage	5	5	5	5	5	5	5	V
Operating/Storage Temperature	-40 °C to +85 °C							
Lead Soldering Temperature [2]	260 °C For 5 Seconds							

Notes:


- 1/10 Duty Cycle, 0.1ms Pulse Width.
- 4mm below package base.

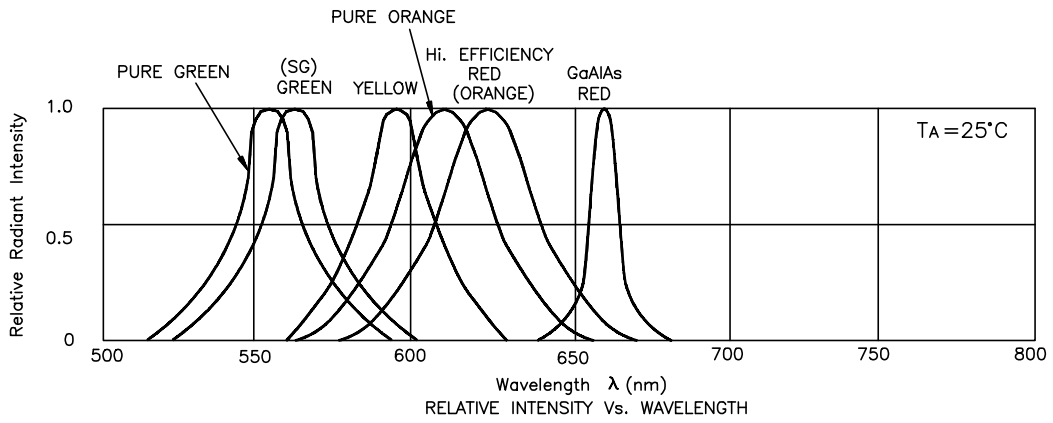


High Efficiency Red L-1334IT ,L-1334EC

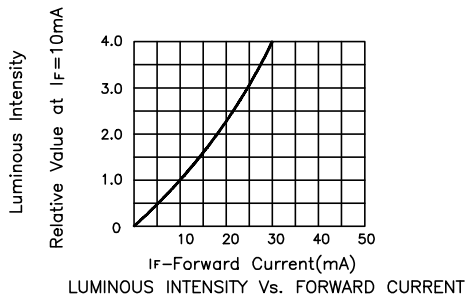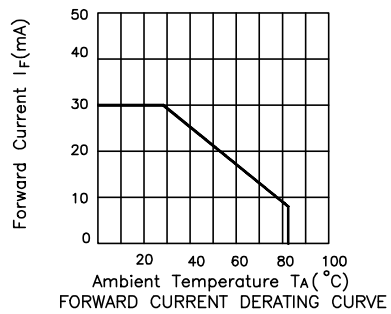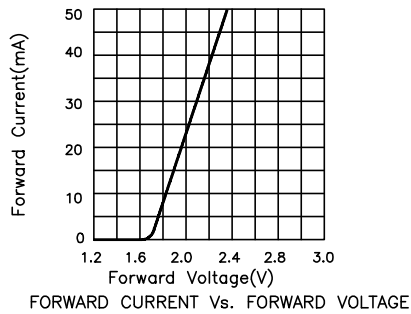


Green L-1334GT, L-1344GC




FORWARD CURRENT Vs. FORWARD VOLTAGE

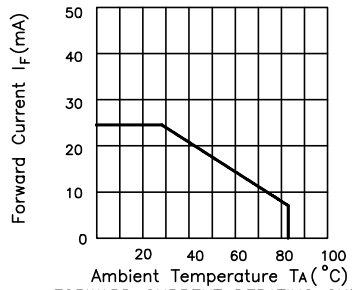

FORWARD CURRENT DERATING CURVE

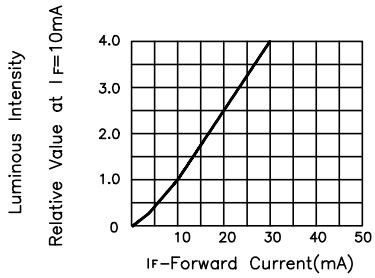


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Yellow L-1334YT, L-1334YC




FORWARD CURRENT Vs. FORWARD VOLTAGE

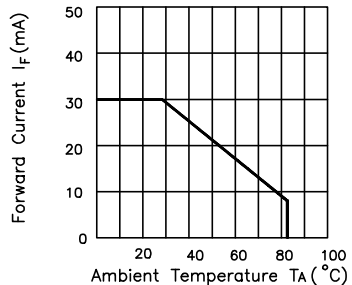

FORWARD CURRENT DERATING CURVE

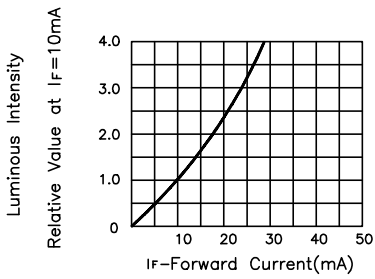


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Pure Orange L-1334NT, L-1334NC




FORWARD CURRENT Vs. FORWARD VOLTAGE

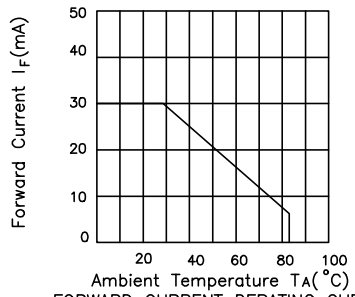

FORWARD CURRENT DERATING CURVE

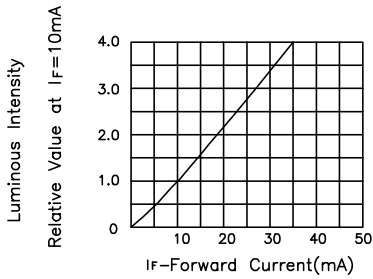


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Pure Green L-1334PGT, L-1334PGC




FORWARD CURRENT Vs. FORWARD VOLTAGE

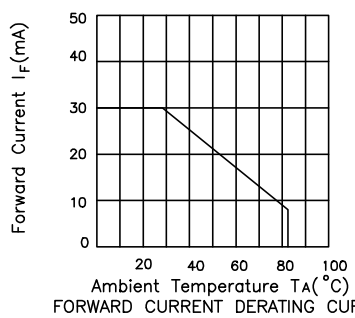

FORWARD CURRENT DERATING CURVE

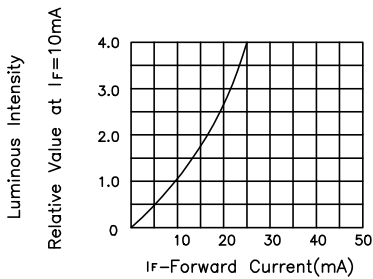


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Super Bright Red L-1334SRC, L-1334SRT, L-1334SRWT




FORWARD CURRENT Vs. FORWARD VOLTAGE

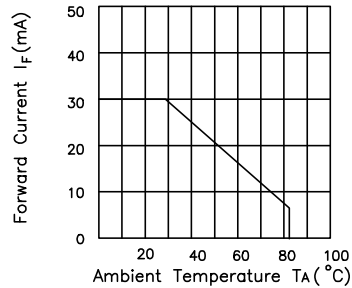

FORWARD CURRENT DERATING CURVE

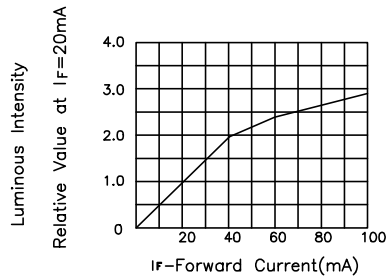


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Super Bright Green L-1334SGT, L-1334SGC




FORWARD CURRENT Vs. FORWARD VOLTAGE

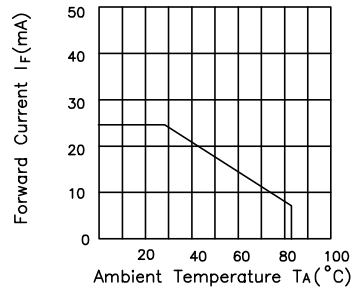

FORWARD CURRENT DERATING CURVE

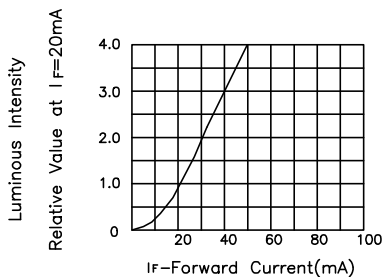

LUMINOUS INTENSITY Vs. FORWARD CURRENT



SPATIAL DISTRIBUTION