

Brought to you by




**COMMUNICA**  
*A World of Electronics*

Web: [www.communica.co.za](http://www.communica.co.za) || Email: [info@communica.co.za](mailto:info@communica.co.za)

**Round Miniature Key Switch**

**IGS104**

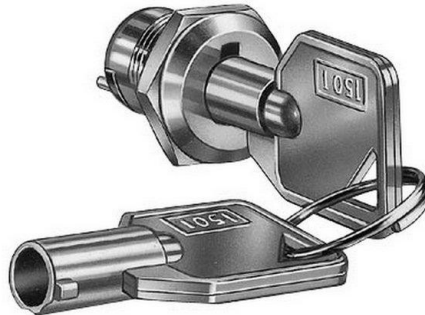

**DESCRIPTIONS:**

- Zinc alloy die cast housing and cylinder, chrome plated.
- Zinc alloy keys, chrome plated.
- Silver plated contacts and terminals.
- S103 (2 Positions, On-On, 4 Terminals)
- S104 (3 Positions, Off-On-On, 4 Terminals)

**KEY-PULL FIGURES**

- –Off Position
- ! –Indicates Key-Pull
- –Indicates No Key-Pull

**SPECIFICATIONS:**

- Contact Rating: 1A 125VAC, 0.5A 250VAC.
- Contact Resistance: 10 Milli-Ohms Max.
- Insulation Resistance: 200 Meg-Ohms Min. (500 VDC)
- Dielectric Strength: 1000 VAC-1 Minute.



Fig.1



Fig.2

Fig. No.	Lock Number	Pole	Positions	Terminals	Key Pulls	Turn	⊖ ⊕ ⊖	Type
1	S103	2	2	4	2	90°	On On	DPDT
2	S104	2	3	4	3	45° - 0° - 90°	Off On On	DPDT

