


SWITCHING CIRCUIT



ROCKER SWITCH MODEL:RH SERIES

RATING: 16A 125/250VAC (UL/CUL)



20A 125VAC (UL/CUL)

16(4)A 250V~T125/55 (ENEC15/CQC)


DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MINUTE

INSULATION RESISTANCE: 500VDC 100M Ω (MIN)


CONTACT RESISTANCE: 20m Ω INITIAL (MAX.)

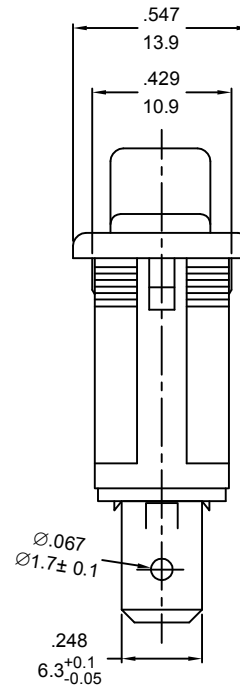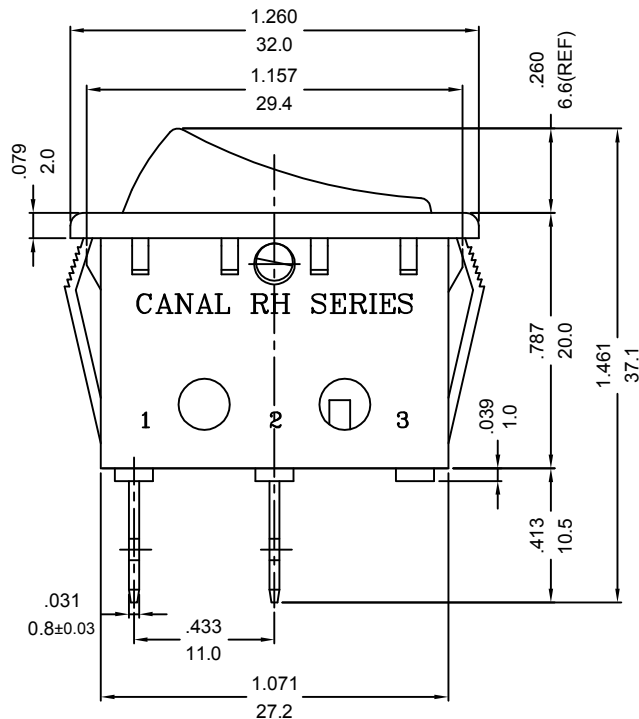


(1)




(4)





(2)



(5)



(3)



NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)



Dim.X	Dim.Y	Z=panel thickness
30.0 ^{+0.1} ₋₀ mm	11.0 ^{+0.1} ₋₀ mm	0.75 to 1.25mm
30.2 ^{+0.1} ₋₀ mm	11.0 ^{+0.1} ₋₀ mm	1.25 to 2mm
30.5 ^{+0.1} ₋₀ mm	11.0 ^{+0.1} ₋₀ mm	2 to 3mm

REVISION	DESCRIPTION	REVISED BY	TOLERANCES	ANGLE $\frac{1}{2}$	UNIT	mm	PART NAME	DWG NO
4			DRAWN BY	達志各	DESIGNED BY	蔡劍	SCALE	5/3
3			CHECKED BY		APPROVED BY		DATE	2017.09.11
2024.03.04	取消VDE，改用ENEC15	達志各					PART NO	RH110-C*N-**N-*C
2017.09.11	首次出圖	達志各						