


NAIS

15A (1C), 10 A (2C) SPACE SAVING POWER RELAY

HL-RELAYS



mm inch

UL File No.: E43028
CSA File No.: LR26550

- High switching capacity in a compact size
— 1 Form C (15 A 125 V AC), 2 Form C (10 A 250 V AC)
- Rugged construction for tough applications
- Long life — Mechanical: Min. 10^8 operations (DC),
Min. 5×10^7 operations (AC)
Electrical: Min. 5×10^5 operations

SPECIFICATIONS

Contacts

Arrangement		1 Form C	2 Form C	
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)		50 mΩ		
Contact material		Silver alloy		
Rating (resistive)	Nominal switching capacity	15 A 125 V AC, 10 A 250 V AC	10 A 250 V AC	
	Max. switching power	AC: 2,500 VA DC: 90 W	AC: 2,500 VA DC: 90 W	
	Max. switching voltage	250 V AC 30 V DC	250 V AC 30 V DC	
	Max. switching current	15 A	10 A	
UL rating		15 A, 1/3 HP 125, 250 V AC 10 A 30 V DC (Max. 10 A when used with socket)	10 A, 1/3 HP 125, 250 V AC 10 A 30 V DC	
CSA rating		10 A, 1/3 HP 125, 250 V AC 10 A 30 V DC	10 A, 1/4 HP 125, 250 V AC 10 A 30 V DC	
Expected life	Mechanical (at 180 cpm)	5×10^7 (AC), 10^8 (DC)		
	Electrical (resistive)	15 A 125 V AC	5×10^5	
		10 A 250 V AC	5×10^5	5×10^5
		3 A 30 V DC	5×10^5	5×10^5

Characteristics (at 25°C 77°F, 50% Relative humidity)

Max. operating speed		20 cpm
Initial insulation resistance*1		Min. 100 MΩ (at 500 V DC)
Initial breakdown voltage*2	Between contact sets	1,500 Vrms for 1 min.
	Between open contacts	1,000 Vrms for 1 min.
	Between contacts and coil	2,000 Vrms for 1 min.
Operate time (at nominal voltage)		Approx. 10 ms (DC type) Approx. 20 ms (AC type)
Release time*3(without diode) (at nominal voltage)		Approx. 5 ms (DC type) Approx. 10 ms (AC type)
Temperature rise, max. (at nominal voltage)		Max. 80°C
Shock resistance	Functional*4	Min. 196 m/s ² {20 G}
	Destructive*5	Min. 980 m/s ² {100 G}
Vibration resistance	Functional*6	58.8 m/s ² {6 G}, 10 to 55 Hz at double amplitude of 1 mm
	Destructive	117.6 m/s ² {12 G}, 10 to 55 Hz at double amplitude of 2 mm
Conditions for operation, transport and storage*7 (Not freezing and condensing at low temperature)	Ambient temperature	-50°C to +70°C -58°F to +158°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 35 g 1.25 oz

Remarks

*1 Measurement at same location as "Initial breakdown voltage" section

*2 Detection current: 10 mA

*3 Excluding contact bounce time

*4 Half-wave pulse of sine wave: 11ms; detection time: 10μs

*5 Half-wave pulse of sine wave: 6ms

*6 Detection time: 10μs

*7 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 49)

TYPICAL APPLICATIONS

Power station control equipment, refrigerators, building control equipment, office machines, and medical equipment.

ORDERING INFORMATION

Ex. HL 2 — H — AC240V

Contact arrangement	Terminal arrangement	Coil voltage
1: 1 Form C 2: 2 Form C	H: Plug-in HP: PC boaed HTM: Top mounting L: Light emitting diode wired, plug-in PL: Light emitting diode wired, PC boaed	AC 6, 12, 24, 48, 120, 240 V DC 6, 12, 24, 48, 110 V

Note: Standard packing Carton: 20 pcs., Case: 200 pcs.

COIL DATA at 20°C 68°F

DC coils

Coil voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Max. allowable voltage, V DC	Coil resistance, Ω (±10%)	Nominal coil current, mA	Operating power, W	
						Nominal	Minimum
6	4.8	0.6	6.6	40	150	0.90	0.58
12	9.6	1.2	13.2	160	75		
24	19.2	2.4	26.4	650	37		
48	38.4	4.8	52.8	2,600	18.5	1.0	0.64
110	88.0	11.0	121.0	10,000	10		

AC coils (50/60 Hz), at 60 Hz

Coil voltage, V DC	Pick-up voltage, V AC (max.)	Drop-out voltage, V AC (min.)	Max. allowable voltage, V AC	Nominal coil current, mA	Operating power, VA	
					Nominal	Minimum
6	4.8	1.8	6.6	200	1.20	0.77
12	9.6	3.6	13.2	100		
24	19.2	7.2	26.4	50		
48	38.4	14.4	52.8	25		
120	96	36	132	11.9		
240	176.0	66	242.0	6.5		


Notes:

- The range of coil current is ±15% for AC (60 Hz), ±10% for DC, at 20°C.
- The relay may be used in the range of 80% to 110% of the nominal coil voltage. However, it is recommended that the relay be used at 85% to 110% nominal voltage to take temporary voltage variations into consideration.
- Each coil resistance of DC types is the measured value at a coil temperature of 20°C. Please allow a compensation of ±0.4% resistance for each coil temperature change of ±1°C.
- All AC 240 V types are rated for double coil voltages, both AC 220 V and AC 240 V.
- For use with 220 or 240 V DC, connect a resistor, as suggested below, in series with the 110 V DC relay.

Voltage	1 Form C, 2 Form C
220 V DC	11 kW (5 W)
240 V DC	13 kW (5 W)

DIMENSIONS



mm inch

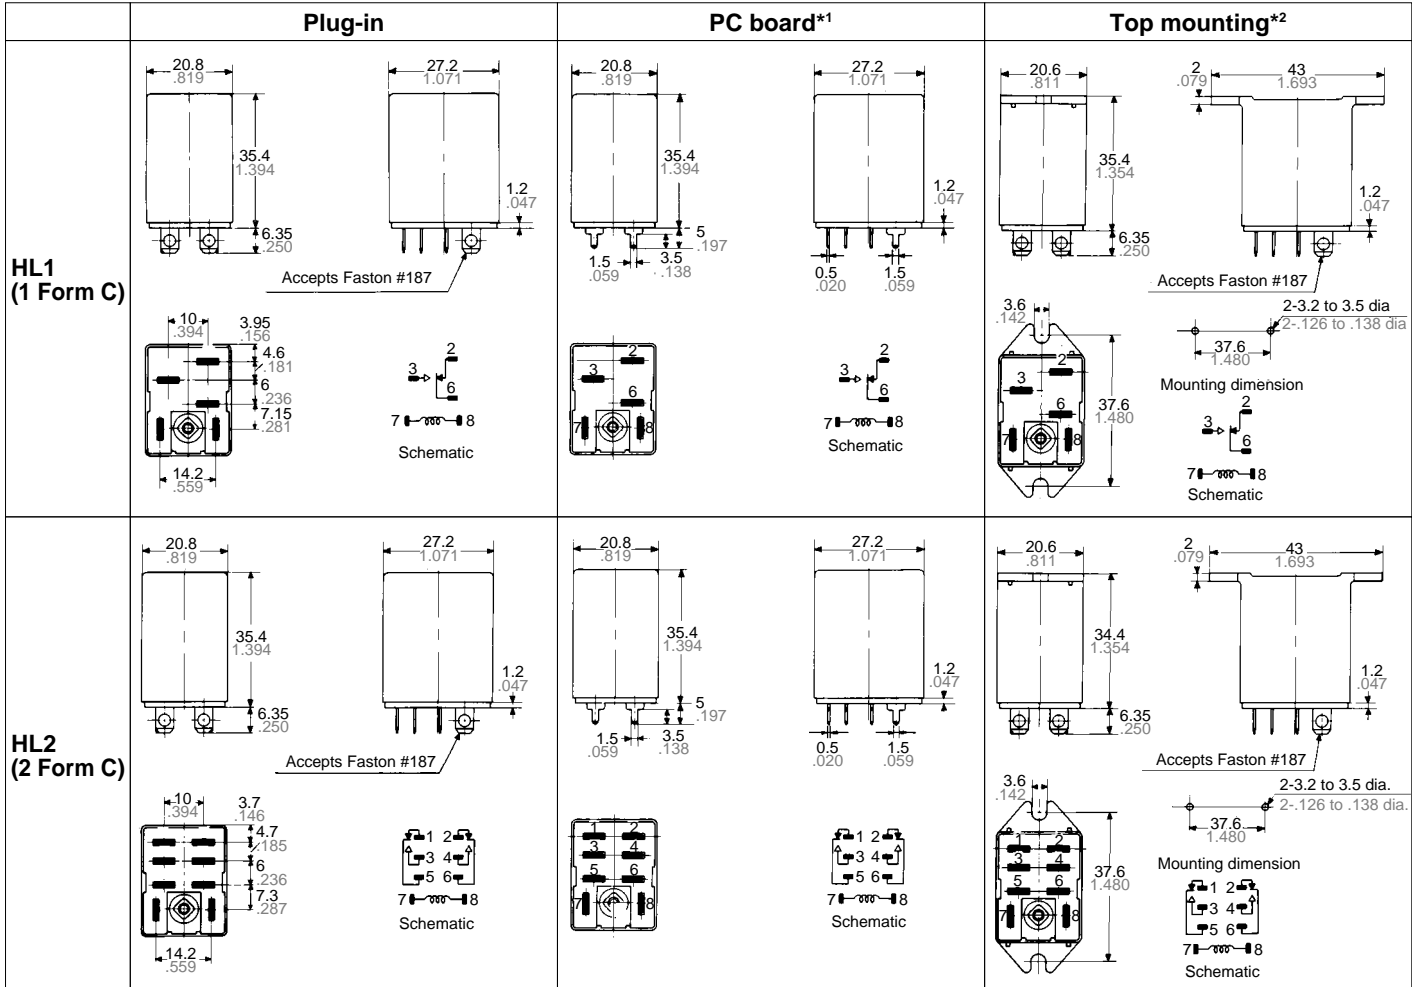

Tolerance: ±0.5 ±0.20

*1 PC board pattern


Copper-side view

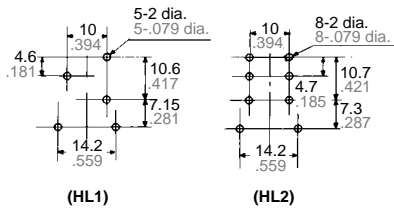


Tolerance: $\pm 0.1 \pm .004$

*2 Top mounting

Hole spacing



Panel cutout for tandem mounting



Tolerance: $\pm 0.5 \pm .020$




ACCESSORIES

1. Plug-in terminal Socket




mm inch




HL1-SS-K (with hold-down clip)

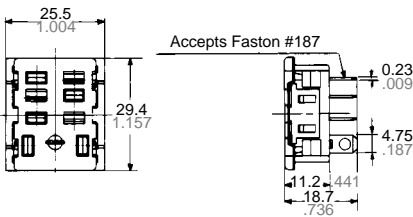


HL2-SS-K (with hold-down clip)

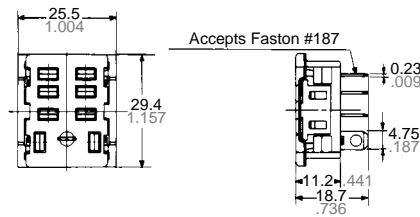

Plug-in terminal socket mount
Simply insert socket into panel hole and push down as indicated to lock socket in place.

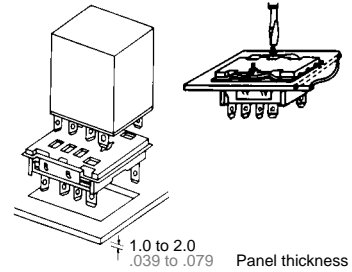

Panel cutout for tandem mounting



Tolerance: $\pm 0.1 \pm .004$

HL




2. PC board terminal socket

mm inch







Layout for tandem mounting (2 Form C)

HL1-PS-K




HL2-PS-K

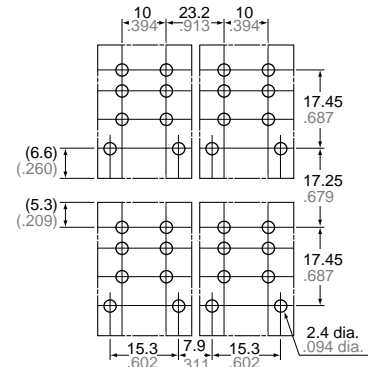


Tolerance: $\pm 0.1 \pm .004$

3. Screw terminal socket for DIN rail assembly


HL2-SFD-K (with hold-down clip)

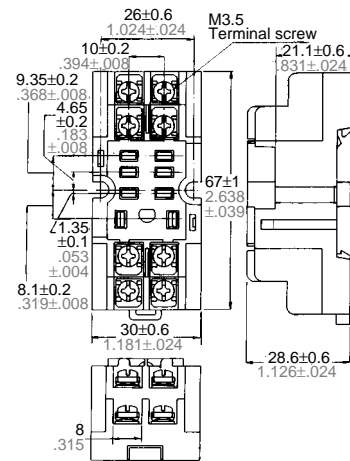

Schematic



Layout for tandem mounting

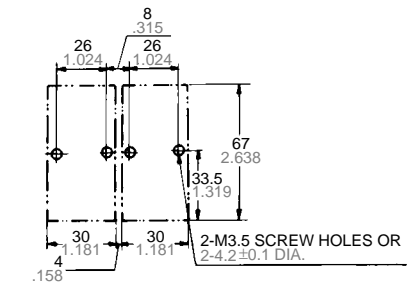

Minimum separation in tandem mounting

(Remark) Max. continuous current of all HL sockets is 10 A.

Tolerance: $\pm 0.1 \pm .004$