




MORSETTIERE PER C.S.
TERMINAL BLOCKS FOR P.C.B.
BARRETTES DE CONNEXION POUR C.I.
ANSCHLUßKLEMMEN FÜR LEITERPLATTE

TIPO
 TYPE
 TYPE
 TYP



CTL

PASSO
 PITCH
 PAS
 RASTERMAß

5,08 mm

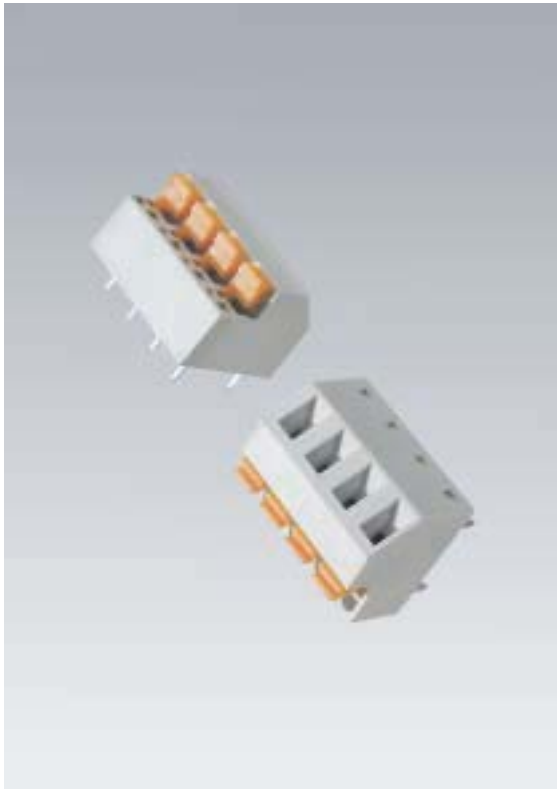

CTL5,08/...



MODULI
 A MOLLA

SCREW LESS
 MODULES

ELEMENTS
 A RESSORT

SCHRAUBENLÖSE
 STIFTFLEISTE



Corpo isolante Grigio	Insulating body Grey	Corps isolant Gris	Isolierkörper Grau	PA68 UL94VO
Leva	Lever	Levier	Taster	PA630FV
Molla	Spring	Ressort	Sprungfeder	Aisi302
Contatto	Pin	Borne	Kontakt	CuSn7+Sn
Sezione	Section	Section	Querschnitt	0,3÷1,5 mm ²
Fori di montaggio	P.C.B. mounting holes	Perçage C. I.	Leiterplattenbohrung	Ø 1,3 mm
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	12 A
Tensione	Voltage	Tension	Betriebsspannung	250 V
Temperatura	Temperature	Température	Temperatur	85°C
Grado di protezione	Protection index	Degré de protection	Schutzklasse	IP00
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	5 M
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	2000 Vac/60"

Ref. EN 60998-1

SCHEMA
 PER ORDINAZIONE

ORDER
 SCHEME

TABLEAU
 DE COMMANDE

BESTELLSCHHEMA

P

p

Passo

N° di Poli

Pitch

Nr. of Poles

Pas

Nb. Pôles

Rastermaß

Polzahl

L = 5,08 x p

MIN 2÷ MAX 7

CTL

5,08

/

....



COMMUNICA
 A World of Electronics

Tel: (012) 657 3500 || Fax: (012) 657 3550