

## Product information STAKAP 5 grau/grey

Industrial Connecting Solutions: Rectangular Connectors: Power Connectors (ST series): Surface mounted socket: STAKAP 5 grau/grey http://e-catalog.beldensolutions.com/link/57078-24228-256261-24351-24354-35782/en/conf/uistate STAKAP 5 grau/grey Surface mounted socket, not assembled with added contacts **Delivery informations** Availability available **Product description** Surface mounted socket, not assembled with added contacts Description Туре STAKAP 5 grau/grey Order No. 932 511-106 Type of contact female 5 + PE Number of contacts Conductor size max. 1 mm<sup>2</sup> **Housing Color** grey Contact bearer color black Technical data Pin dimensions 1 6 mm AC 400 V / DC 250 V Rated voltage Rated current DC 10 A / AC 6 A Contact resistance <= 10 m0hm Type of termination screws Mounting Schrauben Material Contact material Cu Zn Contact surface material Ag PA Contact bearer material Housing material PA **Environmental conditions** Protection class (IEC 60529) IP 54 Pollution severity Temperature range -30 °C to +90 °C Inflammability class Housing UL 94 HB UL 94 V-0 Contact bearer **Approvals** VDE VDE SEV SEV



Scope of delivery and accessories
Accessories to order separately

Packing unit
Packaging unit

100 pieces


safety brackets STASI 3, order no. 732 045-001



Industrial Connecting Solutions: Rectangular Connectors: Power Connectors (ST series): Surface mounted socket: STAKAP 5 grau/grey http://e-catalog.beldensolutions.com/link/57078-24228-256261-24351-24354-35782/en/conf/uistate

Picture

Drawing

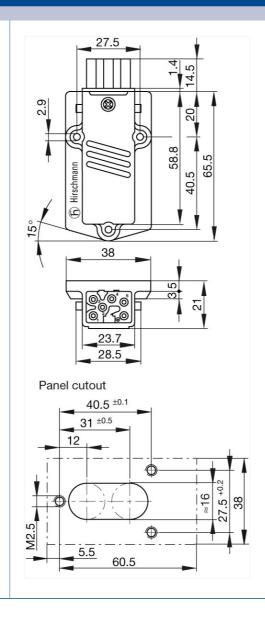

## Belden Deutschland GmbH

Im Gewerbepark 2 58579 Schalksmühle

Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com





The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

