

CAMERA

TD-7422AE2H

2MP HD Analog IR Bullet Camera



- 1080P real-time image, high resolution, true color
- AHD / TVI / CVI / CVBS standard and lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night, digital WDR
- Support noise reduction function
- 20 ~ 30m IR night view distance
- IP66 ingress protection
- Support COC



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>


Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn

SPECIFICATIONS

Model	TD-7422AE2H
Specifications	
Camera	
Image Sensor	1 / 2.9 "CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 50s ~ 1 / 100000s (PAL); 1 / 60s ~ 1 / 100000s (NTSC)
IR Distance	20 ~ 30 m
Frame Rate	30fps(60Hz); 25fps (50Hz)
Min. Illumination	0 lux (IR ON)
Lens	2.8 mm or 2.8~12mm optional
Lens Mount	M12 or D14 optional
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 66
Functions	
Function Control	OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
2D/3D NR	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Defog	No
HLC	No
Sharpness	Yes
Image Setting	Yes
Defect Correction	Auto
Language	Chinese and English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Others	
Power Supply	DC12V (± 10%)
Power Consumption	IR OFF : < 1W; IR ON : < 4W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ 86.7 x 219.4
Weight (net)	Approx. 0.58KG

DIMENSIONS

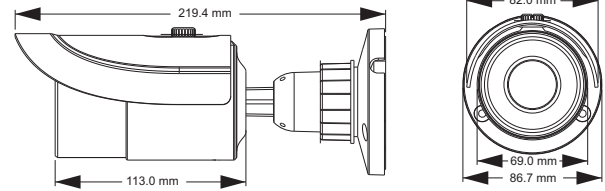

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-7422AE2H(D/SW/IR2)
	TD-7422AE2H(D/FZ/SW/IR2)