


Φ2.4x7mm, RoHS Compliant & Pb-Free
MICROFUSE (VERY QUICK-ACTING)
微型保险丝管 (特快熔断型)

INTERRUPTING CAPACITY / 分断能力:

50 amperes at 125V AC (100mA-3A), 50 amperes at 250V AC (375mA-3A)
30 amperes at 125V AC (3.15A-10A)
30 amperes at 250V AC (100mA-350mA, 3.15A-10A)
30 amperes at 72V AC (12A-15A), 50 amperes at 60V DC (20A)
100 amperes at 125V AC (1A-5A) PSE, 50 amperes at 125V DC (250mA-5A) CCC
50 amperes at 125V DC (100mA-3A) UL/cUL, 50 amperes at 125V DC (3.15A-10A) UR/cUR

Dimensions/ 尺寸:

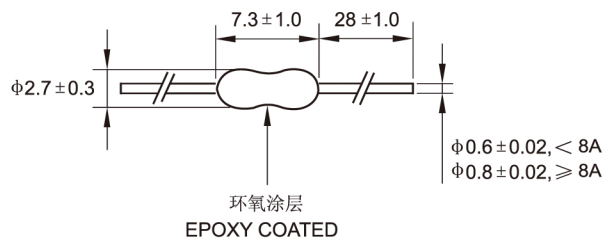

Standards/ 标准: UL 248-1, UL 248-14


Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

20N AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY) 20N 平均 I-T 曲线图 (仅供参考)

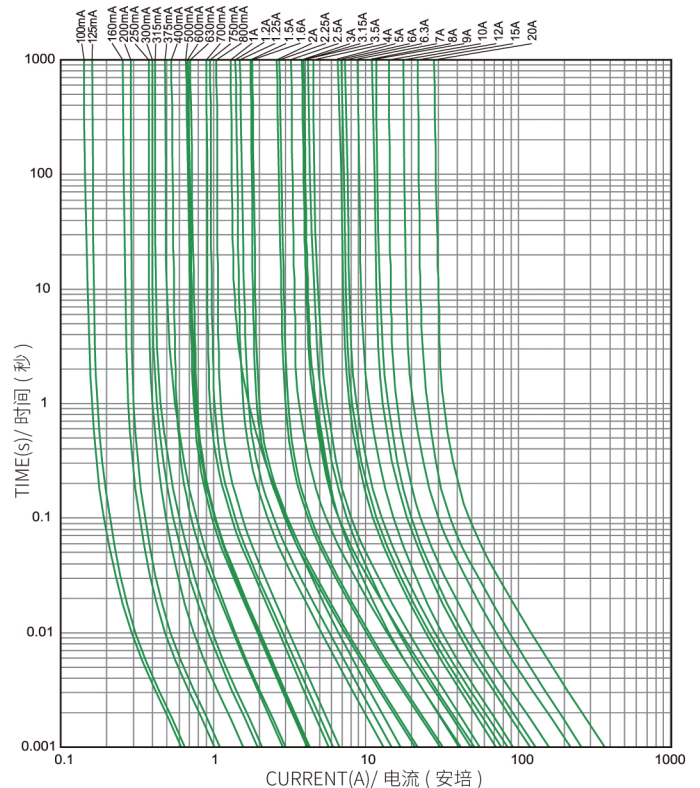

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证								REFERENCE (A:Sec.) (RoHS) I'T 参考值	
		CCC		UL(cUL)		UR(cUR)		CSA			PSE
		L	H	L	H	L	H	L	L		
20N-0160H/L	160mA			●	●	●	●	●	●	0.002313	
20N-0200H/L	200mA			●	●	●	●	●	●	0.002719	
20N-0250H/L	250mA	●		●	●	●	●	●	●	0.005643	
20N-0300H/L	300mA			●	●	●	●	●	●	0.008507	
20N-0315H/L	315mA	●		●	●	●	●	●	●	0.009699	
20N-0375H/L	375mA			●	●	●	●	●	●	0.01937	
20N-0400H/L	400mA	●	●	●	●	●	●	●	●	0.01841	
20N-0500H/L	500mA	●	●	●	●	●	●	●	●	0.03792	
20N-0600H/L	600mA			●	●	●	●	●	●	0.03965	
20N-0630H/L	630mA	●	●	●	●	●	●	●	●	0.04021	
20N-0700H/L	700mA			●	●	●	●	●	●	0.07328	
20N-0750H/L	750mA			●	●	●	●	●	●	0.08122	
20N-0800H/L	800mA	●	●	●	●	●	●	●	●	0.1002	
20N-010H/L	1A	●	●	●	●	●	●	●	●	0.4457	
20N-012H/L	1.2A			●	●	●	●	●	●	0.2627	
20N-013H/L	1.25A	●	●	●	●	●	●	●	●	0.3341	
20N-015H/L	1.5A			●	●	●	●	●	●	0.5409	
20N-016H/L	1.6A	●	●	●	●	●	●	●	●	0.5568	
20N-020H/L	2A	●	●	●	●	●	●	●	●	1.038	
20N-023H/L	2.25A			●	●	●	●	●	●	1.076	
20N-025H/L	2.5A	●	●	●	●	●	●	●	●	1.899	
20N-030H/L	3A			●	●	●	●	●	●	2.851	
20N-032H/L	3.15A	●		●	●	●	●	●	●	2.049	
20N-035H/L	3.5A			●	●	●	●	●	●	2.704	
20N-040H/L	4A	●		●	●	●	●	●	●	3.666	
20N-050H/L	5A	●		●	●	●	●	●	●	6.102	
20N-060H/L	6A			●	●	●	●	●	●	6.802	
20N-063H/L	6.3A			●	●	●	●	●	●	8.075	
20N-070H/L	7A			●	●	●	●	●	●	10.18	
20N-080H/L	8A			●	●	●	●	●	●	16.21	
20N-090H/L	9A			●	●	●	●	●	●	18.77	
20N-100H/L	10A			●	●	●	●	●	●	25.54	
20N-120H/L	12A			●	●	●	●	●	●	50.89	
20N-150H/L	15A			●	●	●	●	●	●	68.28	
20N-200H/L	20A			●	●	●	●	●	●	147.1	


● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V (L 代表 125V 100mA-10A)
L DENOTES FOR 72V (L 代表 72V 12A-15A), L DENOTES FOR 60V (L 代表 60V 20A)

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
200%	20 seconds Max. 最慢 20 秒

PACKING/ 包装:

1. INNER BOX/ 内盒: AMMO PACK

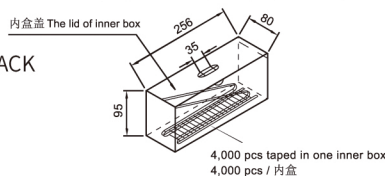

Unit 单位: mm

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON
CARTON SIZE / 尺寸: L440x W270 x H230(mm)